

## NASA Contractor Report 166018

(NASA-CR-166018) EXPERIMENTAL STUDY OF THE  
SEPARATING CONFLUENT BOUNDARY-LAYER. VOLUME  
2: EXPERIMENTAL DATA Final Report  
(Lockheed-Georgia Co., Marietta.) 81 p  
HC A05/MF A01

N84-20481

Unclas  
CSCL 01A G3/02 12874

# Experimental Study of the Separating Confluent Boundary-Layer Volume II - Experimental Data

J. A. Braden  
R. R. Whipkey  
G. S. Jones  
D. E. Lilley

LOCKHEED-GEORGIA COMPANY  
A Division of Lockheed Corporation  
Marietta, Georgia

Contract NAS1-16028  
March 1983



National Aeronautics and  
Space Administration

Langley Research Center  
Hampton, Virginia 23665

## FOREWORD

This document is submitted in accordance with the requirements of NASA Contract NASI-16028, "Experimental Studies of the Separating Confluent Boundary Layer." H. L. Morgan is the NASA-Langley Contract Monitor, and J. A. Braden is the Lockheed-Georgia Project Manager.

The technical descriptions and results from this experimental study are presented in two volumes; Volume I (NASA CR 3655) summarizes the test program and provides limited test results and comparative analysis. The bulk of the data, comprised of laser-velocimeter measurements and airfoil surface pressures, are contained in the present volume and its supplement in tabulated and plotted form.



## TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
	FOREWORD	i
	LIST OF FIGURES	v
	LIST OF TABLES	vi
1.0	INTRODUCTION	1
2.0	LIST OF SYMBOLS	3
3.0	EXPERIMENTAL SUMMARY	7
3.1	Configuration Matrix	7
3.2	LV-Orientation	7
4.0	EXPERIMENTAL PRESSURE DATA	8
4.1	Pressure Distributions	8
4.2	Integrated Lift Data	8
5.0	EXPERIMENTAL LV-DATA - COMPOSITE PLOTS	9
5.1	Composite Plots	9
5.2	Individual Profiles	9
5.3	Tabulated LV Results	10

\*Appendix A - Tabulated Data For Single-Element Airfoils; LV Test

027

\*Available as a Supplement to NASA CR-166018.

\*Appendix B - Individual Profile Data for Single-Element Airfoil; LV  
Test 027

\*Appendix C - Tabulated Data for Multi-Element Airfoil; LV Test 032

\*Appendix D - Individual Profile Data for Multi-Element Airfoil; LV  
Test 032

\*Appendix E - Tabulated Surface Pressure Data for Single and Multi-  
Element Airfoils; Pressure Tests 031 and 032

\*Available as a Supplement to NASA CR-166018.

# LIST OF FIGURES

<u>Figure</u>	<u>Title</u>	<u>Page</u>
1.	Definition of Geometric Parameters on GAW-1 High Lift Airfoil.	14
2.	Spatial Orientation of "Off-Surface" LV Surveys for Wakes and Freestream Entry Flows.	15
3.	GAW-1 Airfoil Coordinates.	16
4.	29% C Fowler Flap Coordinates	17
5.	15% C Leading-Edge Slat Coordinates.	18
6.	GAW-1 Chordwise Surface Pressure Port Locations - Main Element and Flap.	19
7-31	Pressure Distributions for LV-Surveys, GAW-1 Airfoil, Configurations A-1 through F-3.	20
32-35	Variation of Lift Coefficient with Angle-of-Attack for Configurations A through F.	45
36-60	Laser-Velocimeter Composite Plot Surveys for Configurations A-1 through F-3.	49

## LIST OF TABLES

Table	Title	Page
I	Configuration Matrix Selected for Detailed LV-Flow Surveys	11
II	Surface-Pressure Data Identification, GAW-1 Airfoil	12

## 1.0 INTRODUCTION

This report is a companion document to NASA CR 3655, "An Experimental Study of the Separating Confluent Boundary Layer, Volume I - Summary ." Volume I provides a detailed description of an experimental study of the separating confluent boundary layer on a two-dimensional, high-lift airfoil (NASA GAW-1). The primary instrumentation employed in the study was a two-dimensional laser-velocimeter system used in a "back-scatter" operational mode with limited data checks made with other, more conventional instruments. The present document, and its supplement, present the bulk of the data acquired in the program along with the necessary information to identify tabulated and plotted test results with corresponding airfoil configurations and test conditions.

Appendixes A, B, C, D, and E contain the LV-derived boundary-layer and wake data for approximately 30,000 combinations of airfoil geometric locations and configurations in the form of velocity vectors, turbulence intensities and Reynolds shear stresses. Tabulated surface-pressure data, corresponding to the LV-measurement conditions, are given in appendix E for both single- and multi-element configurations.

Due to the large volume of data contained in the appendixes, appendixes A, B, C, D, and E are included in a "Supplement to NASA CR



166018" which is available upon request. A request form is found at the back of this report.

## 2.0 LIST OF SYMBOLS

$C_\ell$	section lift coefficient, $L/q_\infty C$
$C_{\ell_{\max}}$	maximum section lift coefficient
$C_p$	pressure coefficient, $\Delta P/q_\infty$
$C$	chord length, in.
$C_f$	skin friction coefficient, $\tau_w/q$
$C_{\ell_\alpha}$	section lift-curve slope
$h, H$	height, inches
$L$	section lift, pounds
$g/c$ or $G$	gap-to-chord ratio
$OH/C$ or $OH$	overhang-to-chord ratio
$P$	pressure, psf or psi
$q_\infty$ or $q_e$	freestream dynamic pressure, psf
$M_\infty$	freestream Mach number

$RN_c$	Reynolds number based on airfoil basic chord length
$t/c$	airfoil thickness ratio
$U_\infty$ or $U_e$	freestream velocity, fps
$U_{max}$	velocity at edge of boundary-layer, fps
$u, v$	cartesian velocity components, fps
$u', v'$	turbulent velocity components, fps
$\bar{u}, \bar{v}$	mean velocity components, fps
$x, y, z$	cartesian coordinates, inches
$\alpha$	angle-of-attack, degrees
$\rho$	mass density, slugs/cu. ft.
$\theta$	boundary-layer momentum thickness, inches
$\delta$	boundary-layer height, inches
$\delta^*$	boundary-layer displacement thickness, inches

$\delta_f$  flap deflection, degrees

$\delta_s$  slat deflection, degrees

$\tau$  shearing stress at wall, psf

$\nu$  kinematic viscosity, sq. ft./sec.

#### Subscripts

max maximum

min minimum

$\infty, e$  freestream condition

U, L upper- or lower-surface, respectively

S with reference to slat

M with reference to main-element

F with reference to flap

W with reference to wake

R

resultant, normally with respect to vector summation of  
velocity components

### 3.0 EXPERIMENTAL SUMMARY

#### 3.1 Configuration Matrix

The various combinations of airfoil main-element, flap, and slat used to make up a selected test configuration are summarized in table I. A configuration code number, identifying the high-lift elements involved, appropriate-gap and overhang dimensions, and angle of attack are obtained directly from this chart. As an example, configuration B-2 represents a  $30^\circ$  trailing-edge flapped case with gap-to-chord and overhang-to-chord ratios of 0.04 and 0.0, respectively; the angle of attack is 7.94 degrees. The geometric definitions pertaining to a configuration are given in figure 1. All subsequent data sets contained in the appendixes and as corresponding to a given configuration are given by the configuration code number.

#### 3.2 LV-Orientation

The spatial orientation of the LV-surveys is shown in figure 2. As indicated, the surveys were made perpendicular to the surfaces of the airfoil elements or perpendicular to chord-line extensions for freestream and wake positions.

## 4.0 EXPERIMENTAL PRESSURES

### 4.1 Pressure Distributions

Coordinates for the basic airfoil, flap and slat are given in figures 3 through 5 with the surface-pressure orifice locations shown in figure 6. Pressure distributions in coefficient form,  $C_p = (P - P_s) / q_\infty$ , for various chordwise positions are presented in figures 8 through 31. The identification notation shown on these figures corresponds to the configuration coding discussed in association with table I. For further data identification, table II provides a cross-reference of PRESSURE TEST-RUN-DATA Point number with the configuration code along with the appropriate geometries and angles of attack. With this information, the tabulated surface-pressure data, given in appendix E, can be readily identified.

### 4.2 Integrated Lift Data

The pressure distributions in 4.1 were integrated and presented in figures 32 to 35 as lift coefficient ( $C_l$ ) versus angle of attack ( $\alpha$ ) plots. These figures represent all of the configurations outlined in section 3.1 and in table II.

## 5.0 EXPERIMENTAL LV-DATA - COMPOSITE PLOTS

### 5.1 Composite Plots

The LV profile surveys of velocity vectors are summarized and shown in figures 36 to 60 for each test configuration. A run number identifies each survey which can be found individually in appendixes A, B, C, and D. These composite plots are intended for use as a run summary for the complete test. In some isolated instances, a run number is shown without a corresponding profile. This is done to simplify the plot and, in such cases, the position of the run number indicates the approximate location of the profile. The more exact location is defined in the tabulated data under that run number.


























### 5.2 Individual Profiles

Each LV survey is identified by its run number in appendixes B and D. These individual survey plots are presented as velocity vectors, turbulence intensities, and Reynolds shear stresses. It should be noted that sliding scales are used to accommodate each plot. The LV surveys were made either perpendicular to the surface or chord-line extension as shown in section 3.2, figure 2. The LV-data acquired in wind-axes have been geometrically rotated to axes perpendicular and parallel to the surface or chord-line extension.



### 5.3 Tabulated LV Results

Appendixes A and C contain the tabulated data for all LV surveys shown in appendixes B and D. The headings show the run number and test number (ERF 027 for wing alone data and ERF 032 for flapped or slatted data). The letters (M,W,F,S) after GAW-1 in the title locate the survey position as being on the main element, wake, flap, or slat, respectively, at the given x/c location. For surveys made in the freestream directly upstream of the main-element or slat, the x/c-value carries a negative sign and a subscript of M (main) or S (slat), respectively. The translation angle is the angle relative to the test-section wind-axes at which the survey was run and is also the angle through which the LV wind-axes data have been geometrically rotated.

CONFIGURATION		1	2	3	4	5	6		
A	CLEAN AIRFOIL	 $\alpha = 0^\circ$	 $\alpha = 4.20^\circ$	 $\alpha = 5.86^\circ$	 $\alpha = 11.72^\circ$	 $\alpha = 16.04^\circ$			
		$(G/C)_F=0.04$		$(OH/C)_F=0.0$		$(G/C)_F=0.025$		$(OH/C)_F=0.0$	
B	FLAPPED $\delta_f = 30^\circ$	 $\alpha = 3.98^\circ$	 $\alpha = 7.94^\circ$	 $\alpha = 11.95^\circ$	 $\alpha = 4.13^\circ$	 $\alpha = 12.23^\circ$			
		$(G/C)_F=0.015$		$(OH/C)_F=0.025$		$(G/C)_F=0.015$		$(OH/C)_F=0.0$	
C	FLAPPED $\delta_f = 40^\circ$	 $\alpha = 3.98^\circ$	 $\alpha = 7.99^\circ$	 $\alpha = 10^\circ$	 $\alpha = 3.97^\circ$	 $\alpha = 7.97^\circ$	 $\alpha = 11.05^\circ$		
		$(G/C)_S=0.023$		$(OH/C)_S=0.028$					
D	SLATTED $\delta_s = 27^\circ$	 $\alpha = 17.90^\circ$	 $\alpha = 21.48^\circ$	 $\alpha = 23.03^\circ$	CONFIGURATION			LV-TEST *	PRESS. TEST-RUN**
E	FLAPPED & SLATTED $\delta_s = 42^\circ$ $\delta_f = 30^\circ$	$(\frac{G}{C})_S=0.015$ $(\frac{OH}{C})_S=0.015$			$(\frac{G}{C})_F=0.025$ $(\frac{OH}{C})_F=0.0$				
		 $\alpha = 12.0^\circ$	 $\alpha = 14.06^\circ$	 $\alpha = 16.07^\circ$	A-1 ➤ A-5	027	031-9		
					B-1 ➤ B-3	032	032-24		
					B-4 ➤ B-6		032-25		
					C-1 ➤ C-3		032-29		
					C-4 ➤ C-6		032-65		
					D-1 ➤ D-3		032-58		
					E-1 ➤ E-3		032-40		
F	FLAPPED & SLATTED $\delta_s = 42^\circ$ $\delta_f = 40^\circ$	 $\alpha = 5.3^\circ$	 $\alpha = 9.5^\circ$	 $\alpha = 14.07^\circ$	F-1 ➤ F-3		032-59		
		$(\frac{G}{C})_S=0.015$ $(\frac{OH}{C})_S=0.015$ $(\frac{G}{C})_F=0.015$ $(\frac{OH}{C})_F=0.025$							

ORIGINAL PAGE IS  
OF POOR QUALITY

TABLE 1. - CONFIGURATION MATRIX SELECTED FOR DETAILED LV-FLOW SURVEYS.

TABLE 11. SURFACE-PRESSURE DATA IDENTIFICATION  
GAW-1 AIRFOIL

TEST	RUN	PT.	CONFIG.	FLAP			SLAT			$\alpha$ (DEG)
				$\delta_F$	G/C	OH/C	$\delta_S$	G/C	OH/C	
31	9	3	A-1	—	—	—	—	—	—	0
		5	A-2	—	—	—	—	—	—	4.20
		6	A-3	—	—	—	—	—	—	5.86
		9	A-4	—	—	—	—	—	—	11.72
		14	A-5	—	—	—	—	—	—	16.04
32	24	3	B-1	30	0.04	0.0	—	—	—	3.98
		5	B-2	—	—	—	—	—	—	7.94
		8	B-3	—	—	—	—	—	—	11.95
	25	4	B-4	—	0.025	0.0	—	—	—	4.13
		9	B-5	—	—	—	—	—	—	12.23
32	29	5	C-1	40	0.015	0.025	—	—	—	3.98
		7	C-2	—	—	—	—	—	—	7.99
		8	C-3	—	—	—	—	—	—	10.
		21	C-4	40	0.015	0.0	—	—	—	3.97
	65	1	C-5	—	—	—	—	—	—	7.97
		7	C-6	—	—	—	—	—	—	11.05
32	58	11	D-1	—	—	—	27	0.023	0.028	17.90
		13	D-2	—	—	—	—	—	—	21.48
		14	D-3	—	—	—	—	—	—	23.03


ORIGINAL PAGE IS  
OF POOR QUALITY

TABLE II (CONT'D). SURFACE-PRESSURE DATA IDENTIFICATION  
GAW-1 AIRFOIL

TEST	RUN	PT.	CONFIG	FLAP			SLAT			$\alpha$ (DEG)
				$\delta_F$	G/C	OH/C	$\delta_S$	G/C	OH/C	
32 ↓ ↓	40 ↓ ↓	8	E-1	30 ↓	0.025 ↓	0.0 ↓	45 ↓	0.015 ↓	0.015 ↓	12.0
		9	E-2							14.06
		10	E-3							16.07
32 ↓ ↓	59 ↓ ↓	6	F-1	40 ↓	0.015 ↓	0.025 ↓	45 ↓	0.015 ↓	0.015 ↓	5.3
		8	F-2							9.5
		10	F-3							14.07

ORIGINAL PAGE IS  
OF POOR QUALITY

ORIGINAL PAGE IS  
OF POOR QUALITY

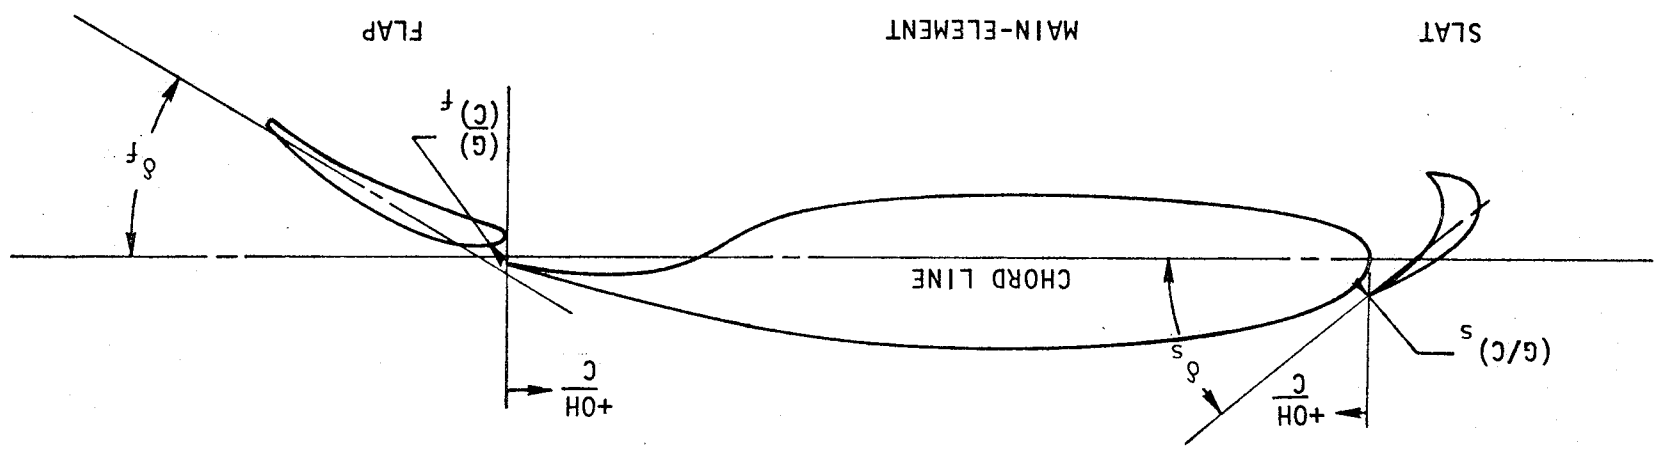

FLAP	.015 - .04	-.025	0 + 40
SLAT	.01 - .03	±.015	25 + 55
G/C	OH/C		δ°

AVAILABLE RANGE OF VARIABLES

FIGURE 1 - DEFINITION OF GEOMETRIC PARAMETERS ON GAW-1 HIGH-LIFT AIRFOIL



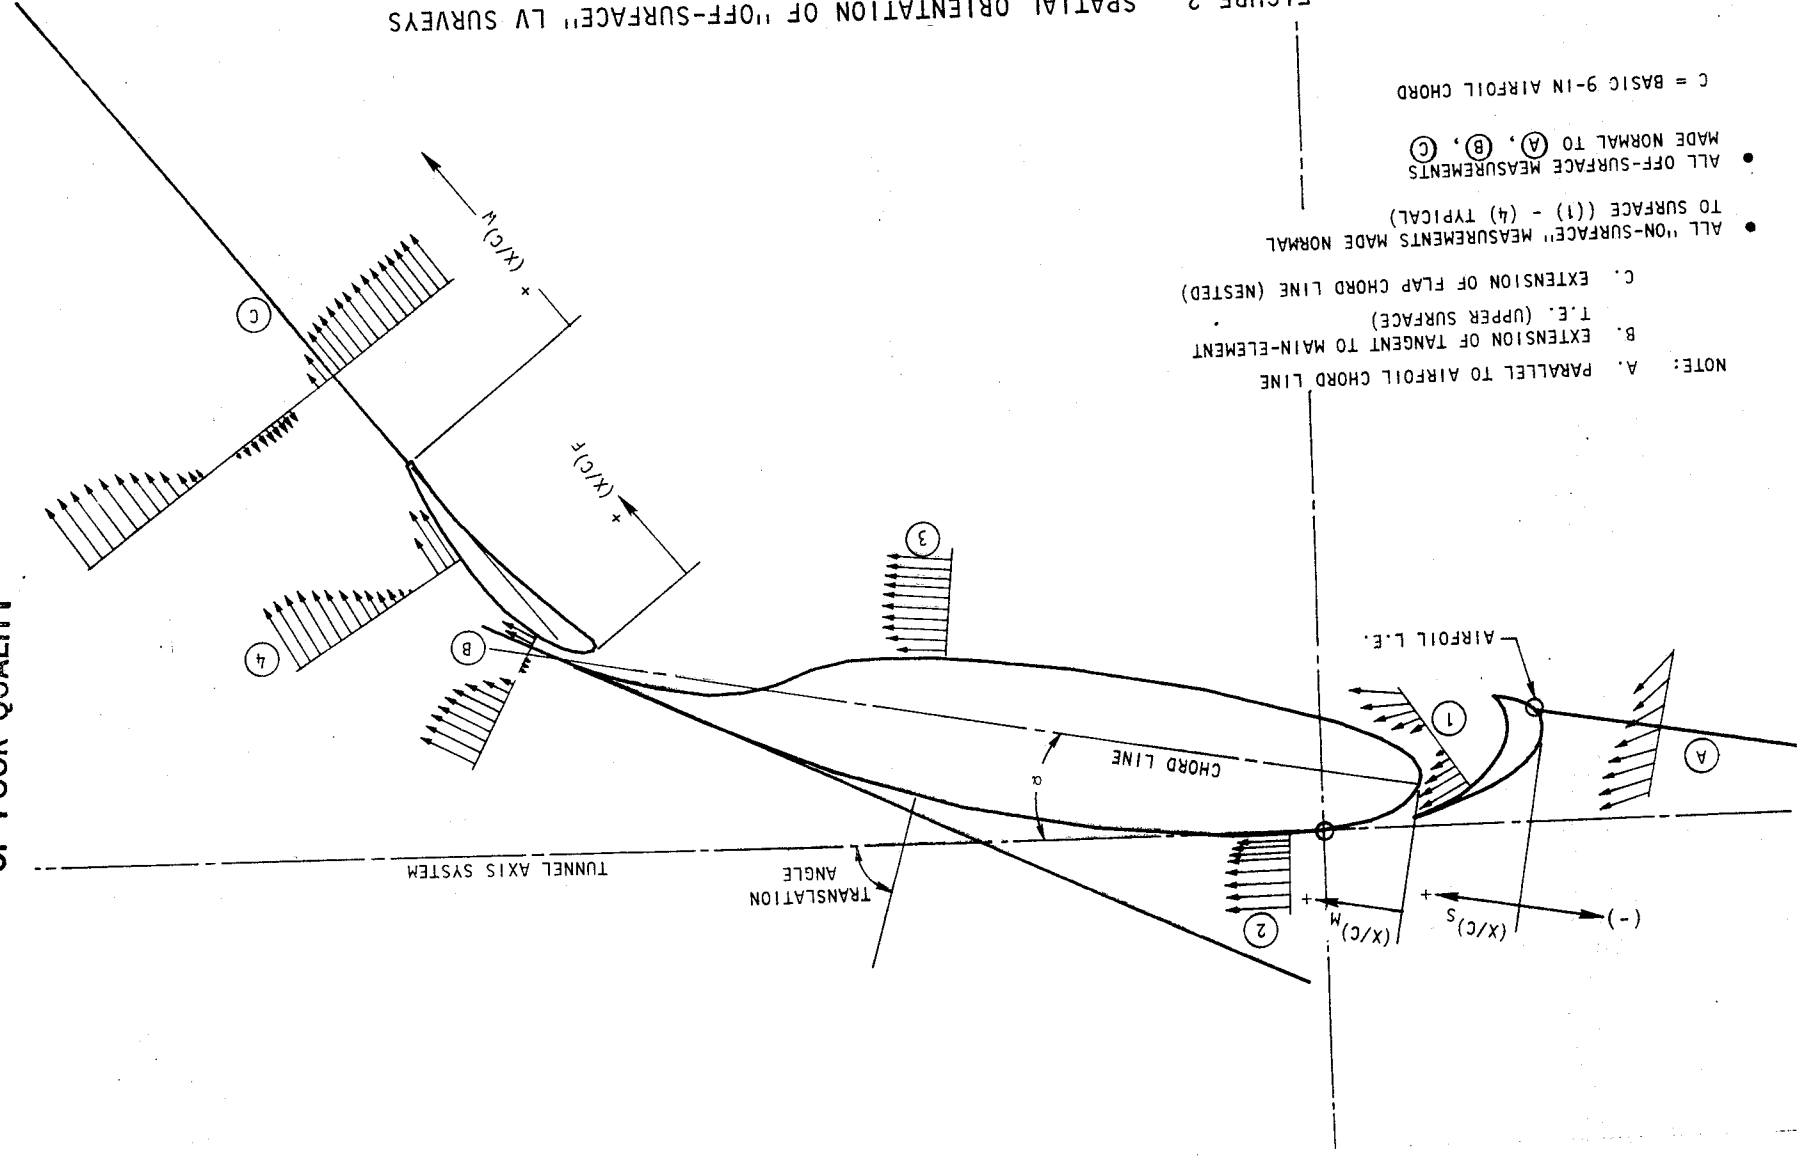


FIGURE 2. SPATIAL ORIENTATION OF "OFF-SURFACE" LV SURVEYS FOR WAKES AND FREE-STREAM ENTRY FLOWS

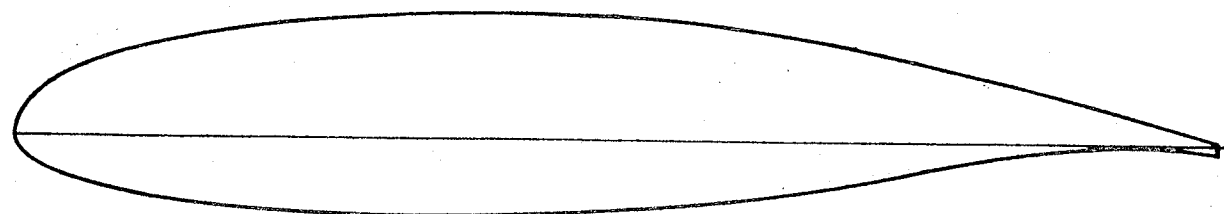

Upper Surface		Lower Surface	
X / c	Z / c	X / c	Z / c
0.00000	0.00000	0.00000	0.00000
.00200	.01300	.00200	-.00930
.00500	.02040	.00500	-.01380
.01250	.03070	.01250	-.02050
.22500	.04170	.02500	-.02690
.03750	.04965	.03750	-.03190
.05000	.05589	.05000	-.03580
.07500	.06551	.07500	-.04210
.10000	.07300	.10000	-.04700
.12500	.07900	.12500	-.05100
.15000	.08400	.15000	-.05430
.17500	.08840	.17500	-.05700
.20000	.09200	.20000	-.05930
.25000	.09770	.25000	-.06270
.30000	.10160	.30000	-.06450
.35000	.10400	.35000	-.06520
.40000	.10491	.40000	-.06490
.45000	.10445	.45000	-.06350
.50000	.10258	.50000	-.06100
.55000	.09910	.55000	-.05700
.57500	.09668	.57500	-.05400
.60000	.09371	.60000	-.05080
.62500	.09006	.62500	-.04690
.65000	.08599	.65000	-.04280
.67500	.08136	.67500	-.03840
.70000	.07634	.70000	-.03400
.72500	.07092	.72500	-.02940
.75000	.06513	.75000	-.02490
.77500	.05907	.77500	-.02040
.80000	.05286	.80000	-.01600
.82500	.04646	.82500	-.01200
.85000	.03988	.85000	-.00860
.87500	.03315	.87500	-.00580
.90000	.02639	.90000	-.00360
.92500	.01961	.92500	-.00250
.95000	.01287	.95000	-.00260
.97500	.00609	.97500	-.00400
1.00000	-.00070	1.00000	-.00800

FIGURE 3 GAW-1 AIRFOIL COORDINATES

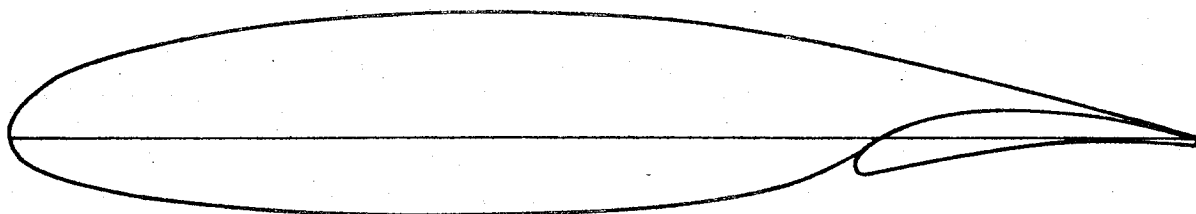

29% Fowler Flap Coordinates			
Upper Surface		Lower Surface	
$x_f/c$	$z_f/c$	$x_f/c$	$z_f/c$
0.00000	-.02350	0.00000	-.02350
.00030	-.02000	.00100	-.02700
.00200	-.01790	.00200	-.02880
.00400	-.01550	.00400	-.03000
.00800	-.01130	.00800	-.03100
.01200	-.00780	.01200	-.03040
.01800	-.00330	.02000	-.02880
.02300	.00000	.03000	-.02700
.02800	.00230	.05000	-.02350
.03800	.00700	.07000	-.01980
.04800	.01100	.09000	-.01600
.05800	.01410	.11000	-.01300
.06800	.01680	.13000	-.01000
.07800	.01900	.15000	-.00770
.08800	.02070	.17000	-.00580
.09800	.02180	.19000	-.00360
.10800	.02230	.21000	-.00270
.11800	.02280	.23000	-.00280
.12800	.02300	.25000	-.00350
.13800	.02340	.27000	-.00500
.14800	.02280	.29000	-.00800
.15800	.02230		
.16800	.02190		
.19000	.01980		
.21000	.01680		
.23000	.01380		
.25000	.00980		
.27000	.00590		
.29000	-.00070		

Nose Radius = .0075<sup>c</sup>


Nose Radius Location ( $x_f/c, z_f/c$ ) = (.0075, -.0235)

FIGURE 4 29% c FOWLER FLAP COORDINATES



ORIGINAL PAGE IS  
OF POOR QUALITY

Upper Surface		Lower Surface	
X / C	Z / C	X / C	Z / C
0.00000	0.00000	0.00000	0.00000
.02000	.01300	.00200	-.00930
.00500	.02040	.00500	-.01380
.01250	.03070	.01250	-.02050
.02500	.04170	.02500	-.02690
.03750	.04965	.03750	-.03190
.05000	.05589	.04500	-.03440
.07500	.06551		
.10000	.07300		
.12500	.07900		
.14000	.08210		
.15000	.08400		

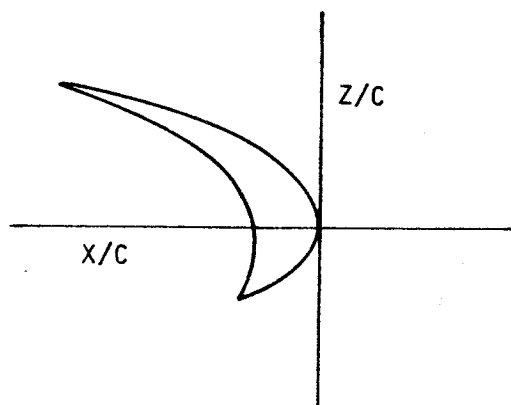

Cove Region	
X / C	Z / C
.04000	-.01600
.03900	.00000
.04500	.01850
.06000	.03800
.08000	.05510
.10000	.06640
.12000	.07500
.14000	.08110
.15000	.08350

FIGURE 5 15% LEADING-EDGE SLAT COORDINATES

GAW-1 AIRFOIL

29% C FLAP

PRESSURE TAP LOCATIONS ON MODEL G

MAIN ELEMENT			FLAP	
X/C (TOP SURFACE)	X/C (BOTTOM SURFACE)	X/C (TOP)	X/C (BOTTOM)	
0	.70	0	0	
.0025	.75	.015	.015	
.0050	.80	.025	.025	
.0075	.85	.05	.05	
.010	.90	.10	.10	
.015	.925	.15	.15	
.020	.95	.25	.25	
.025		.275	.275	
.050		.29	.29	
.075				
.10				
.15				
.20				
.25				
.30				
.35				
.40				
.45				
.50				
.55				
.60				
.65				

FIGURE 6 GAW-1 CHORDWISE SURFACE PRESSURE PORT LOCATIONS -  
MAIN ELEMENT AND FLAP

SINGLE ELEMENT

$$\alpha = 0^\circ$$

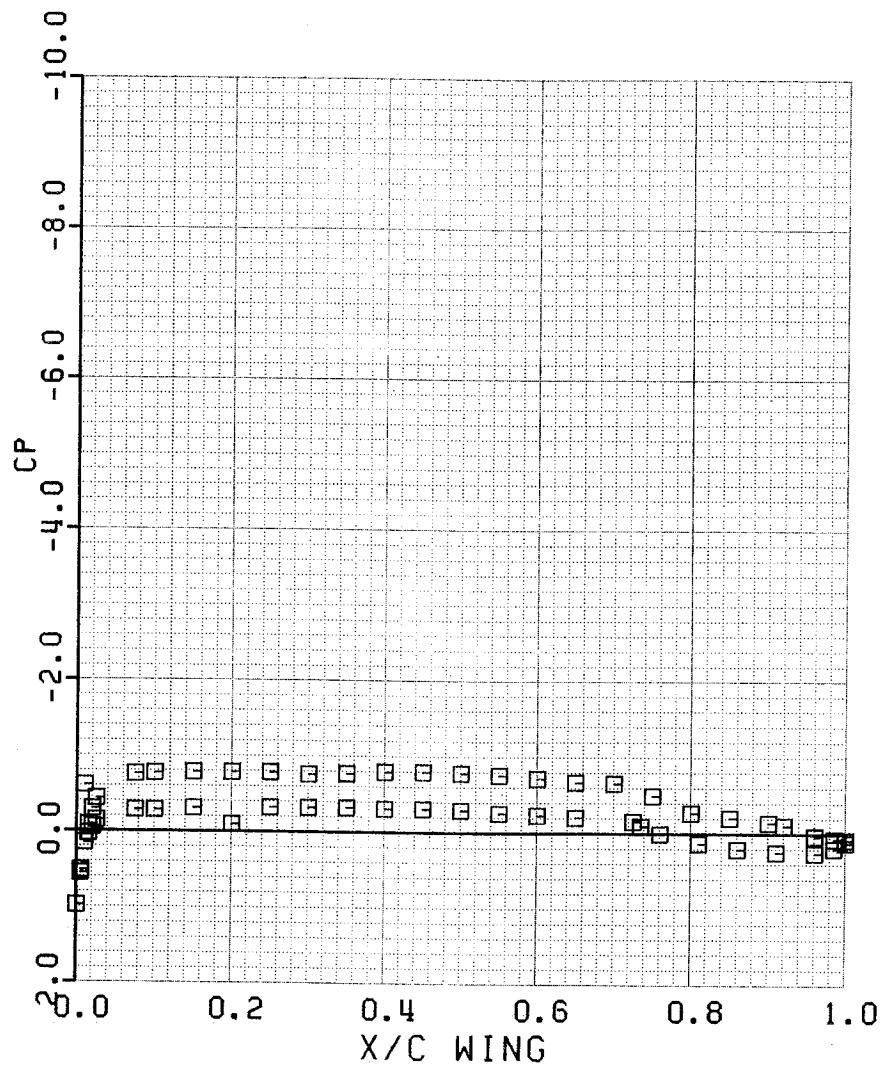


FIGURE 7 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. A-1

ORIGINAL PAGE IS  
OF POOR QUALITY

SINGLE ELEMENT

$$\alpha = 4.2^\circ$$

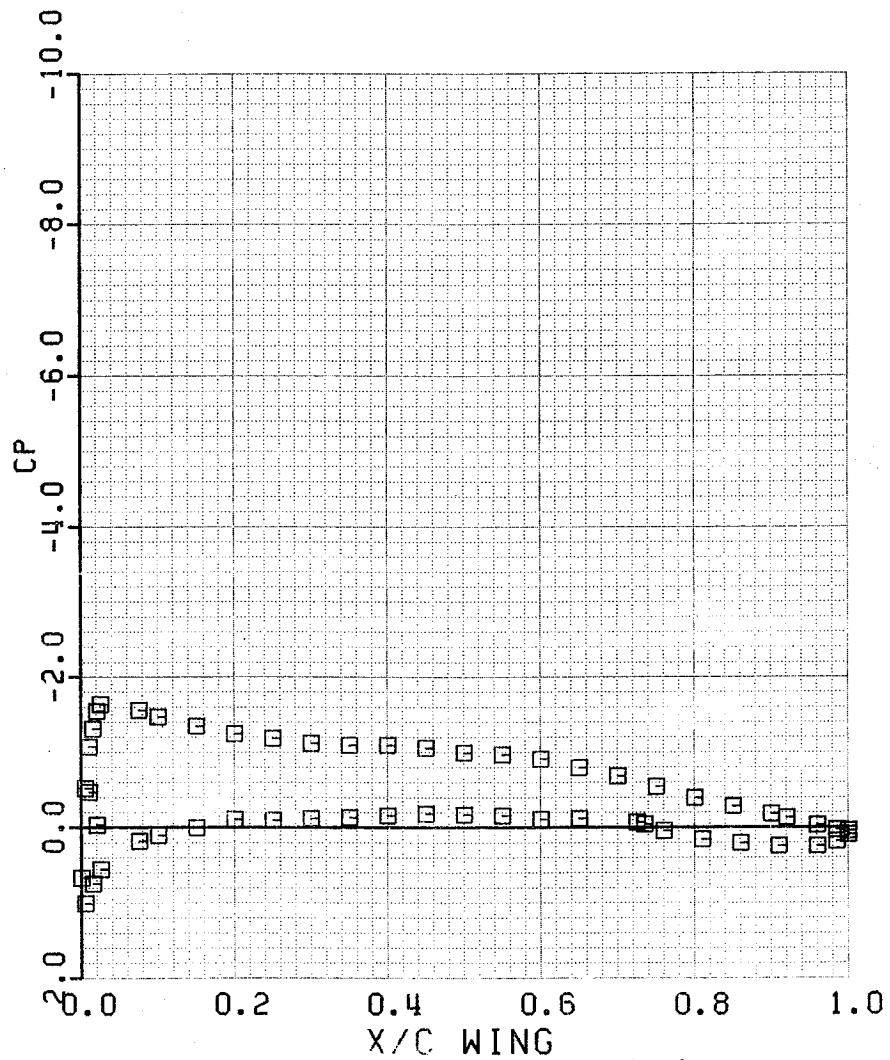


FIGURE 8 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. A-2

ORIGINAL PAGE IS  
OF POOR QUALITY

SINGLE ELEMENT

$$\alpha = 5.86^\circ$$

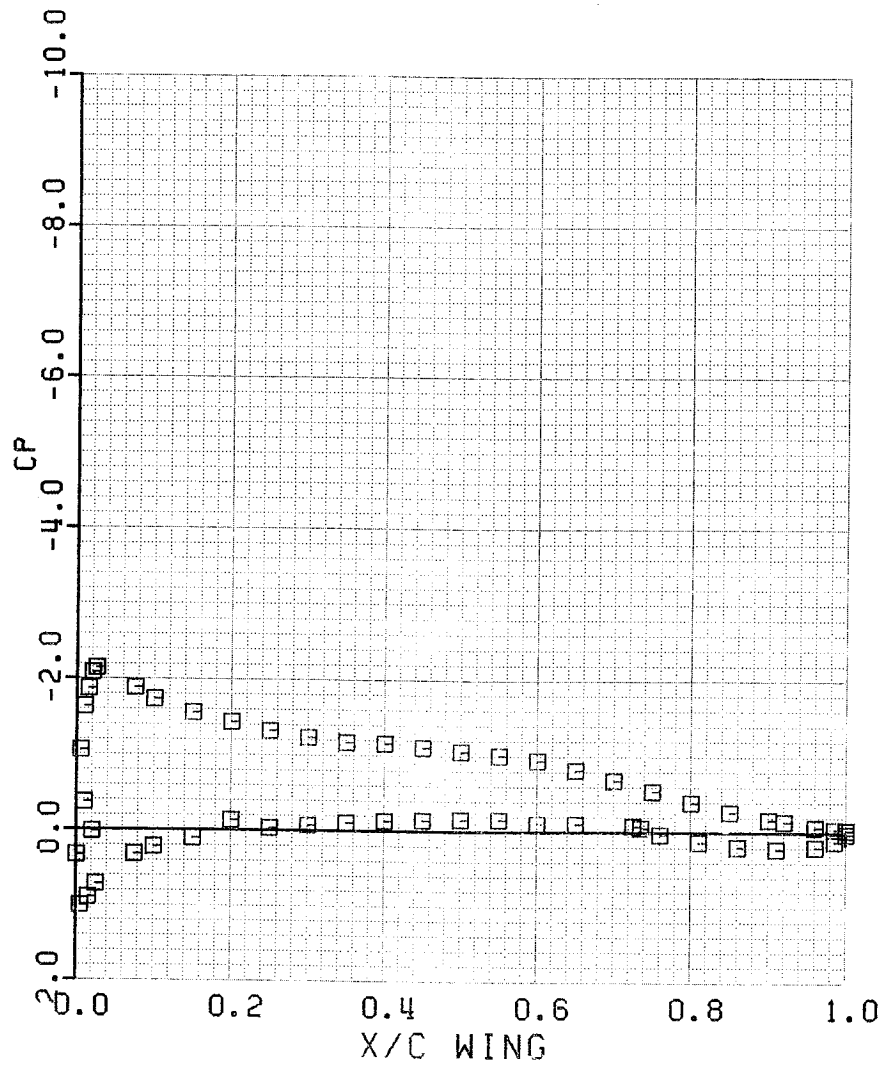


FIGURE 9 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. A-3

ORIGINAL PAGE IS  
OF POOR QUALITY

SINGLE ELEMENT AIRFOIL

$$\alpha = 11.72^\circ$$

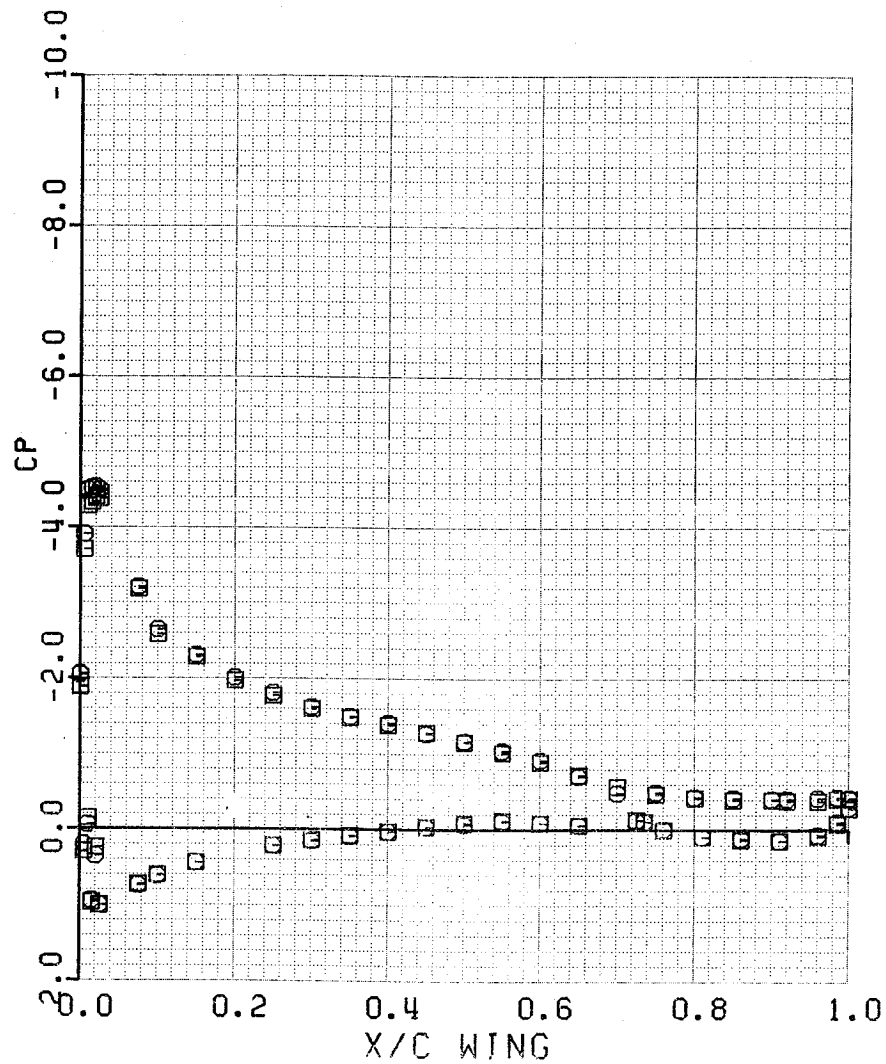


FIGURE 10 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS - PRESSURE DISTRIBUTION, CONFIG. A-4

SINGLE ELEMENT  
 $\alpha = 16.04^\circ$

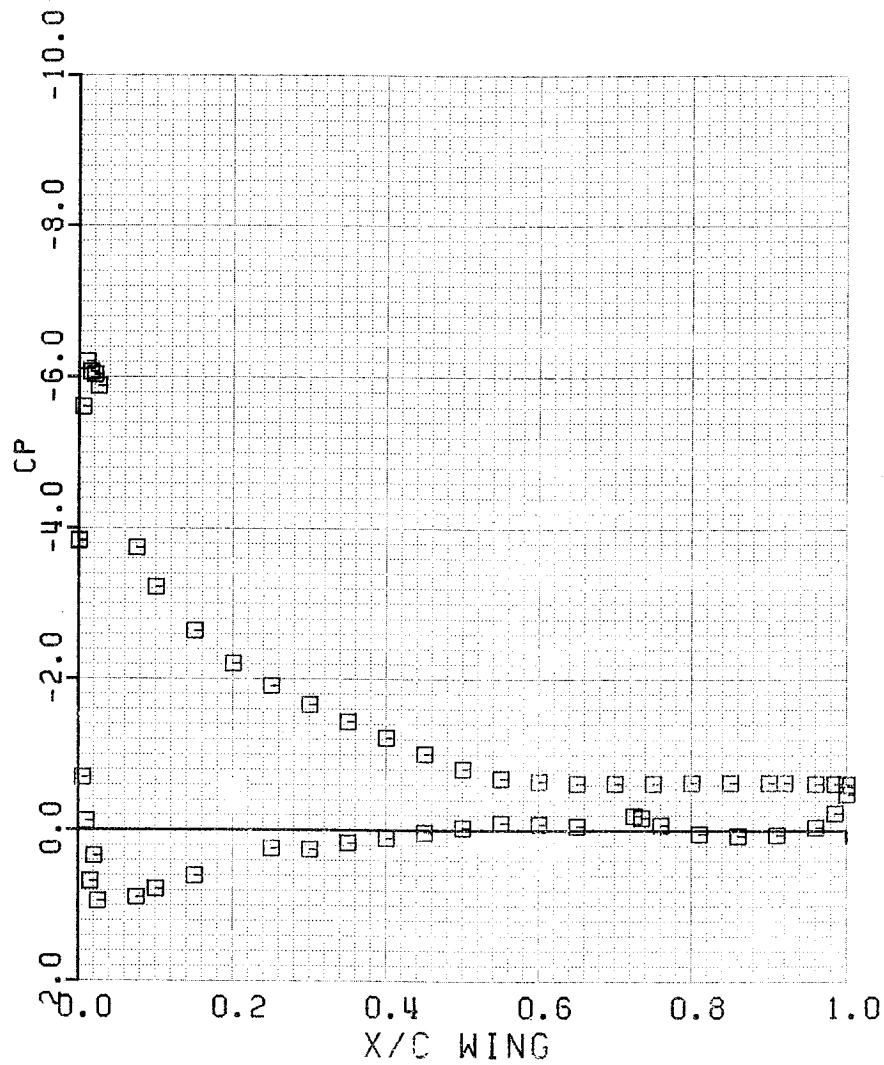


FIGURE 11 GAW-1 AIRFOIL CONFIGURATION FOR LV-  
SURVEYS-PRESSURE DISTRIBUTION, CONFIG. A-5

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	G/C	OH/C
30°	0.040	0.00

$$\alpha = 3.98^\circ$$

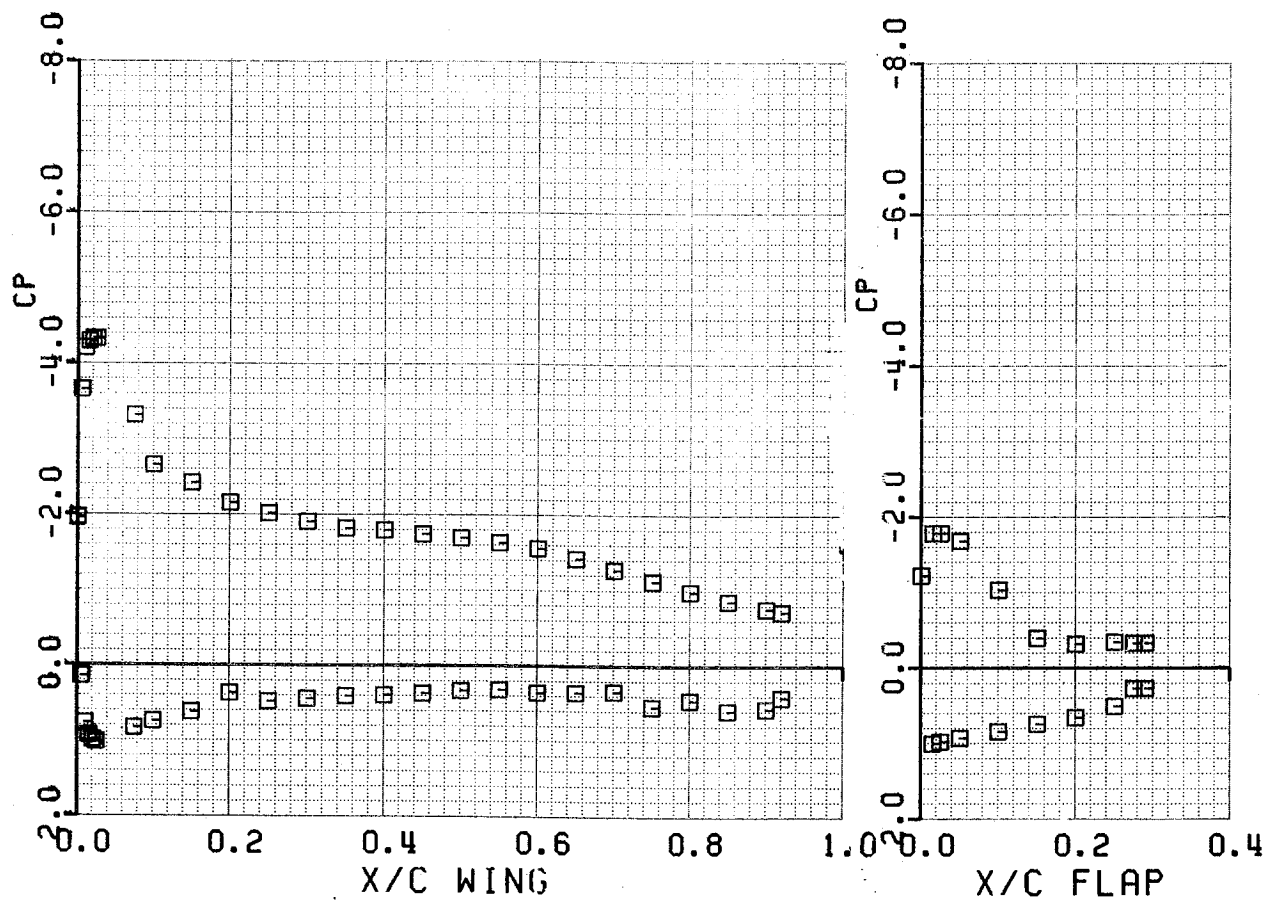


FIGURE 12 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. B-1



ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	G/C	OH/C
$30^\circ$	0.040	0.00

$$\alpha = 7.94^\circ$$

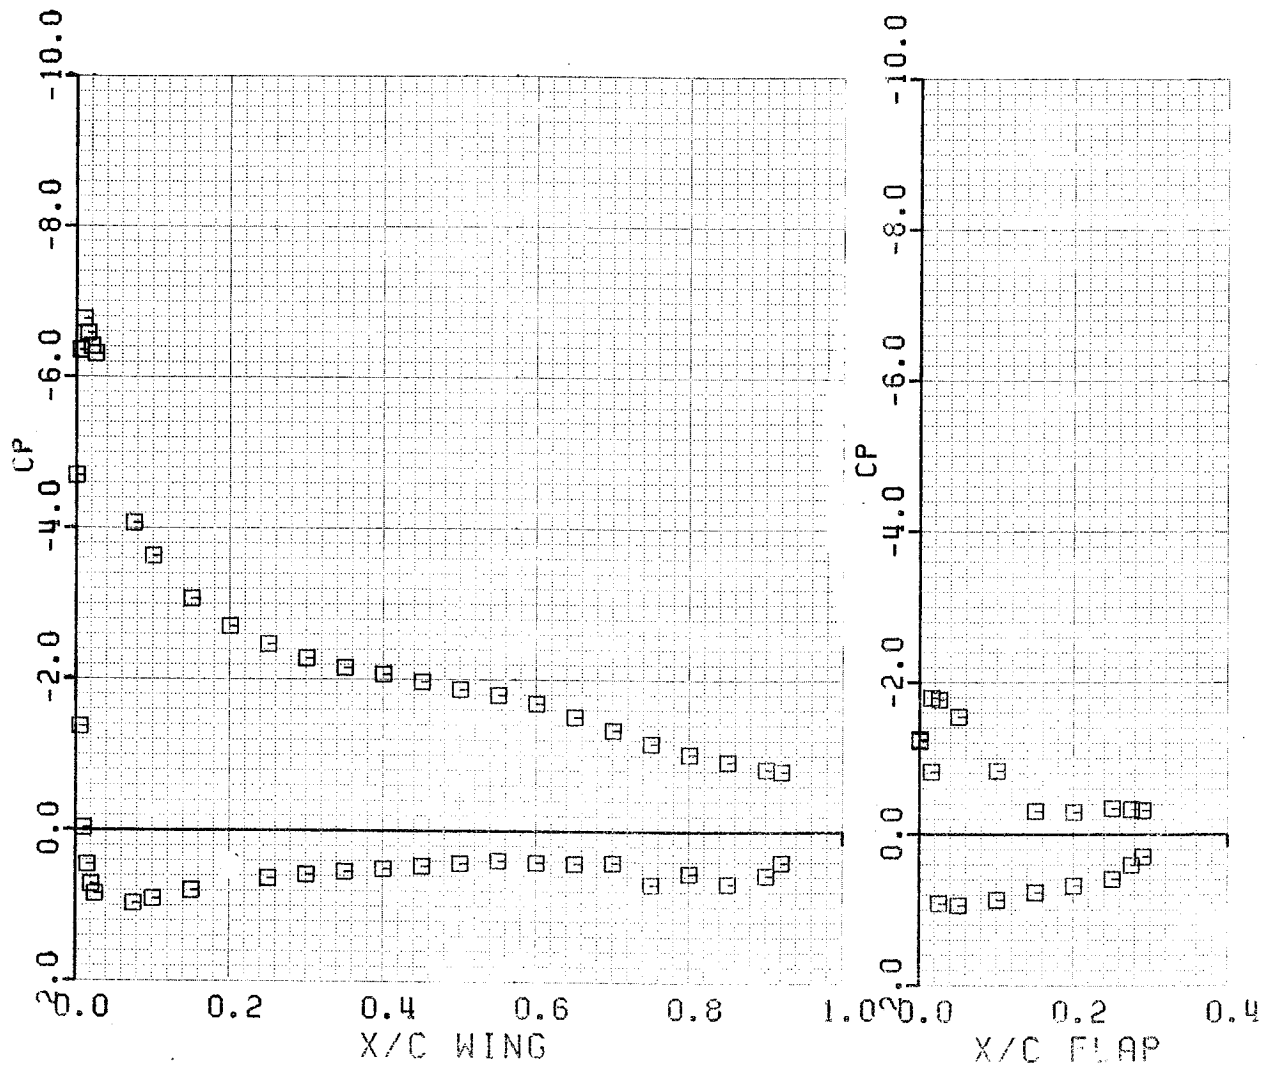


FIGURE 13 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. B-2

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	G/C	OH/C
30°	0.040	0.00

$\alpha - 11.95^\circ$

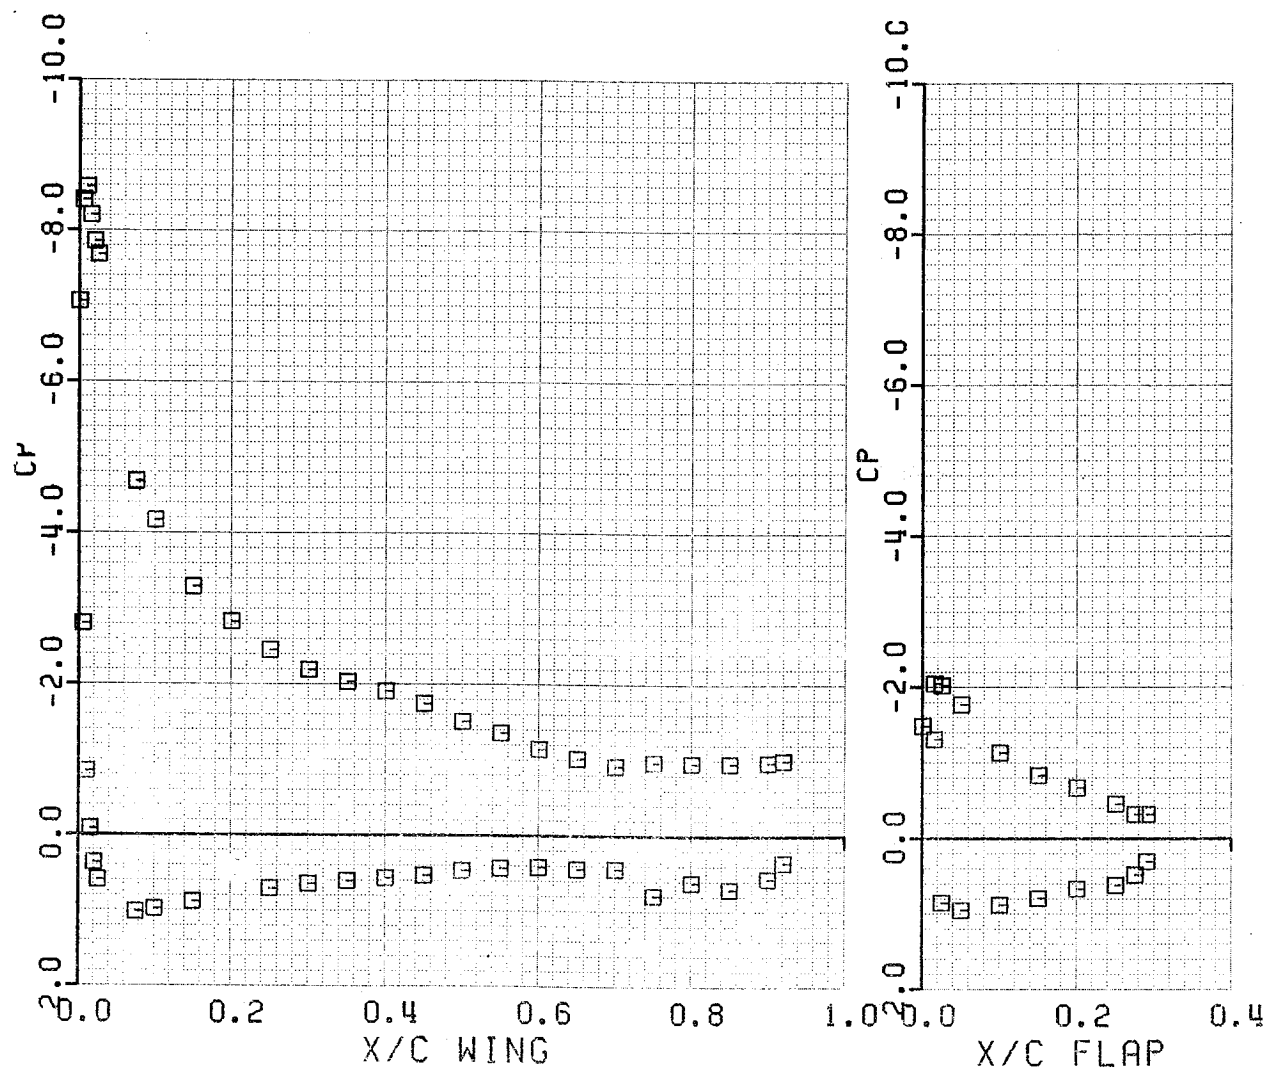


FIGURE 14 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. B-3

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	G/C	OH/C
30°	0.025	0.0

$$\alpha = 4.13^\circ$$

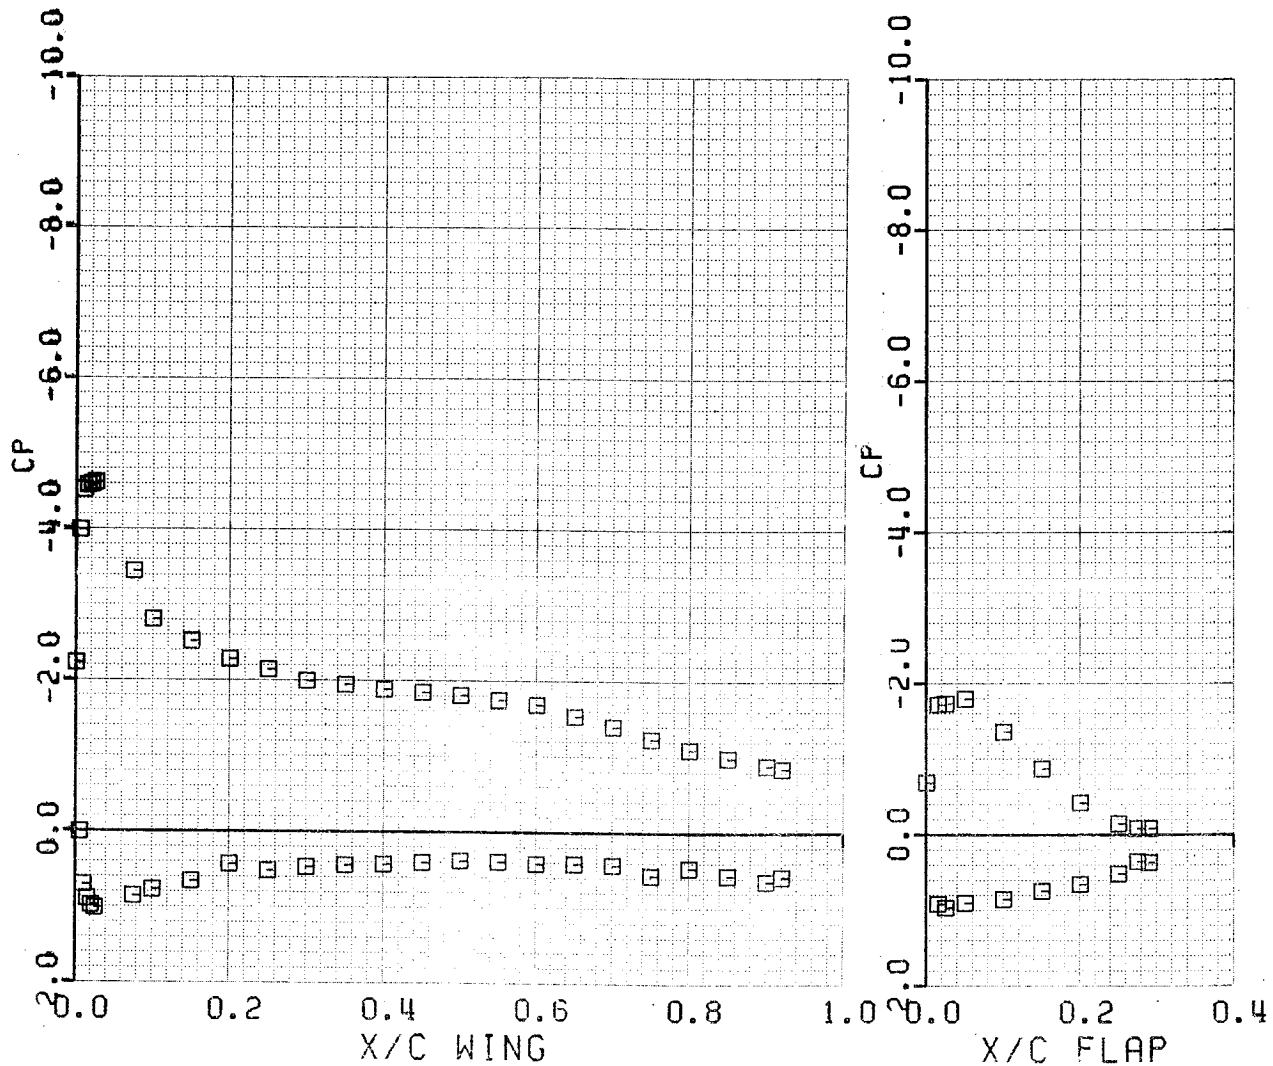


FIGURE 15 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. B-4

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	G/C	OH/C
30°	0.025	0.0

$$\alpha = 12.23^\circ$$

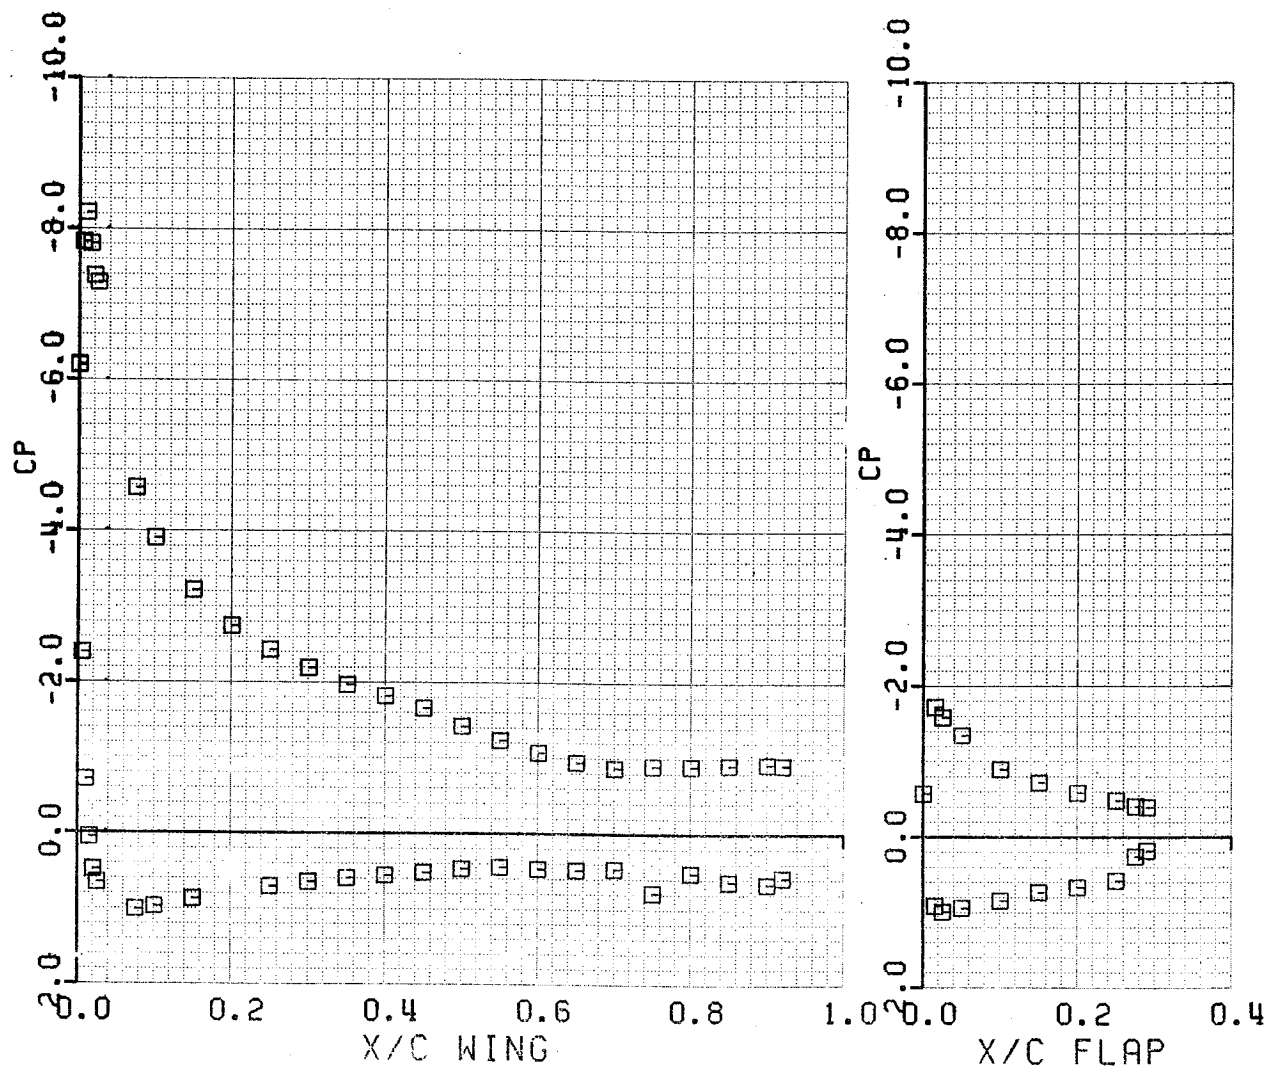


FIGURE 16 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. B-5

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	G/C	OH/C
40°	0.015	0.025

$$\alpha = 3.98^\circ$$

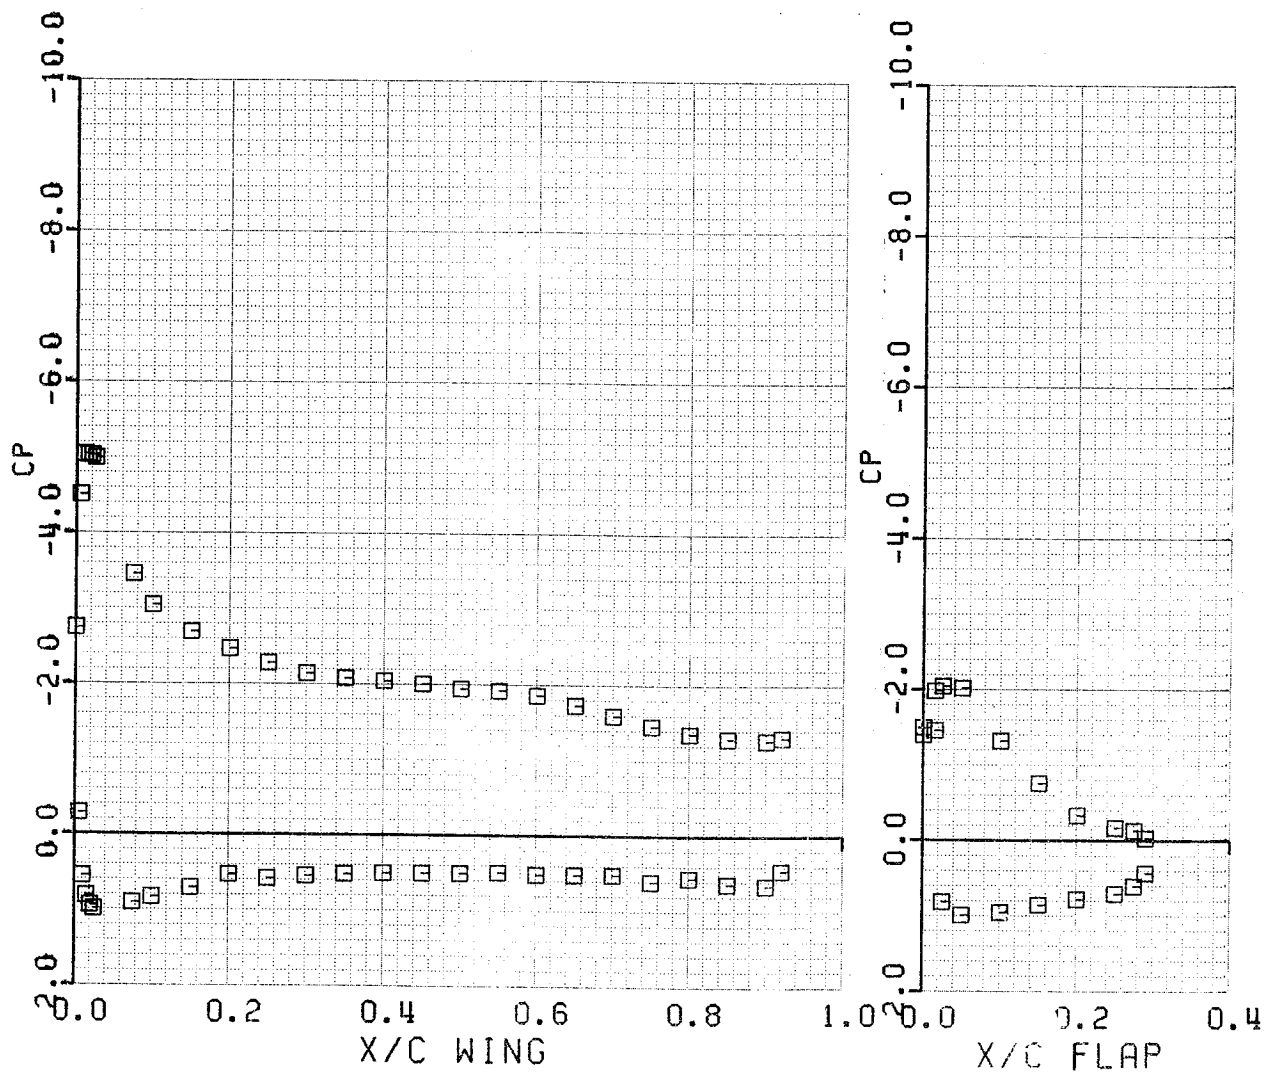


FIGURE 17 GAW-1 AIRFOIL CONFIGURATION FOR LV-  
SURVEYS-PRESSURE DISTRIBUTION, CONFIG. C-1

$\delta_f$	G/C	OH/C
40°	0.015	0.025

$$\alpha = 7.99^\circ$$


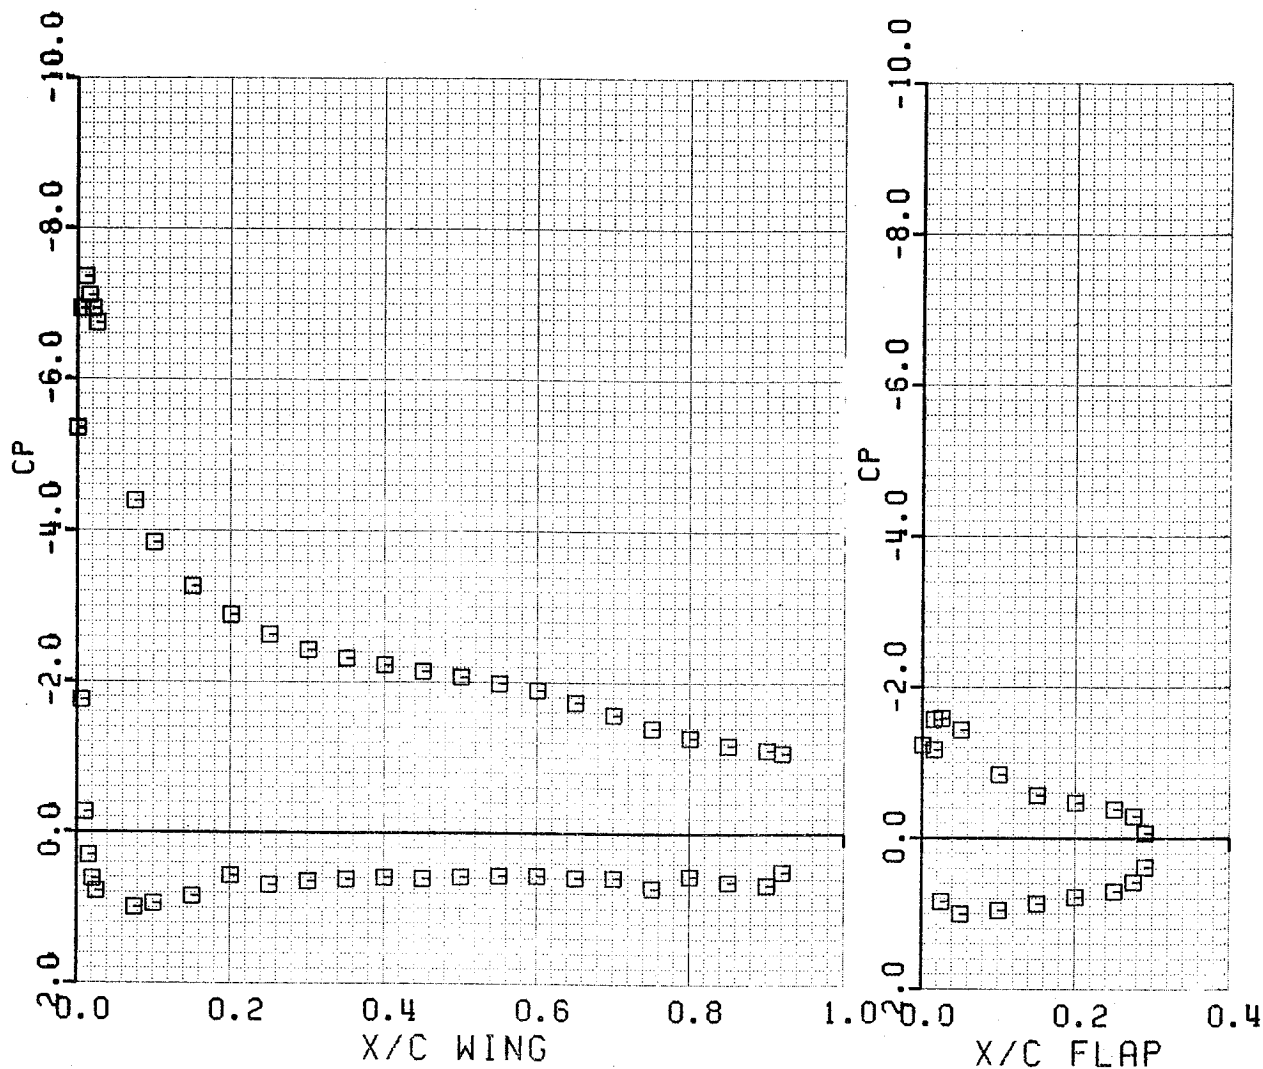


FIGURE 18 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. C-2

FIGURE 19 GAW-1 AIRFOIL CONFIGURATION FOR LV-  
SURVEYS - PRESSURE DISTRIBUTION, CONFIG. C-3

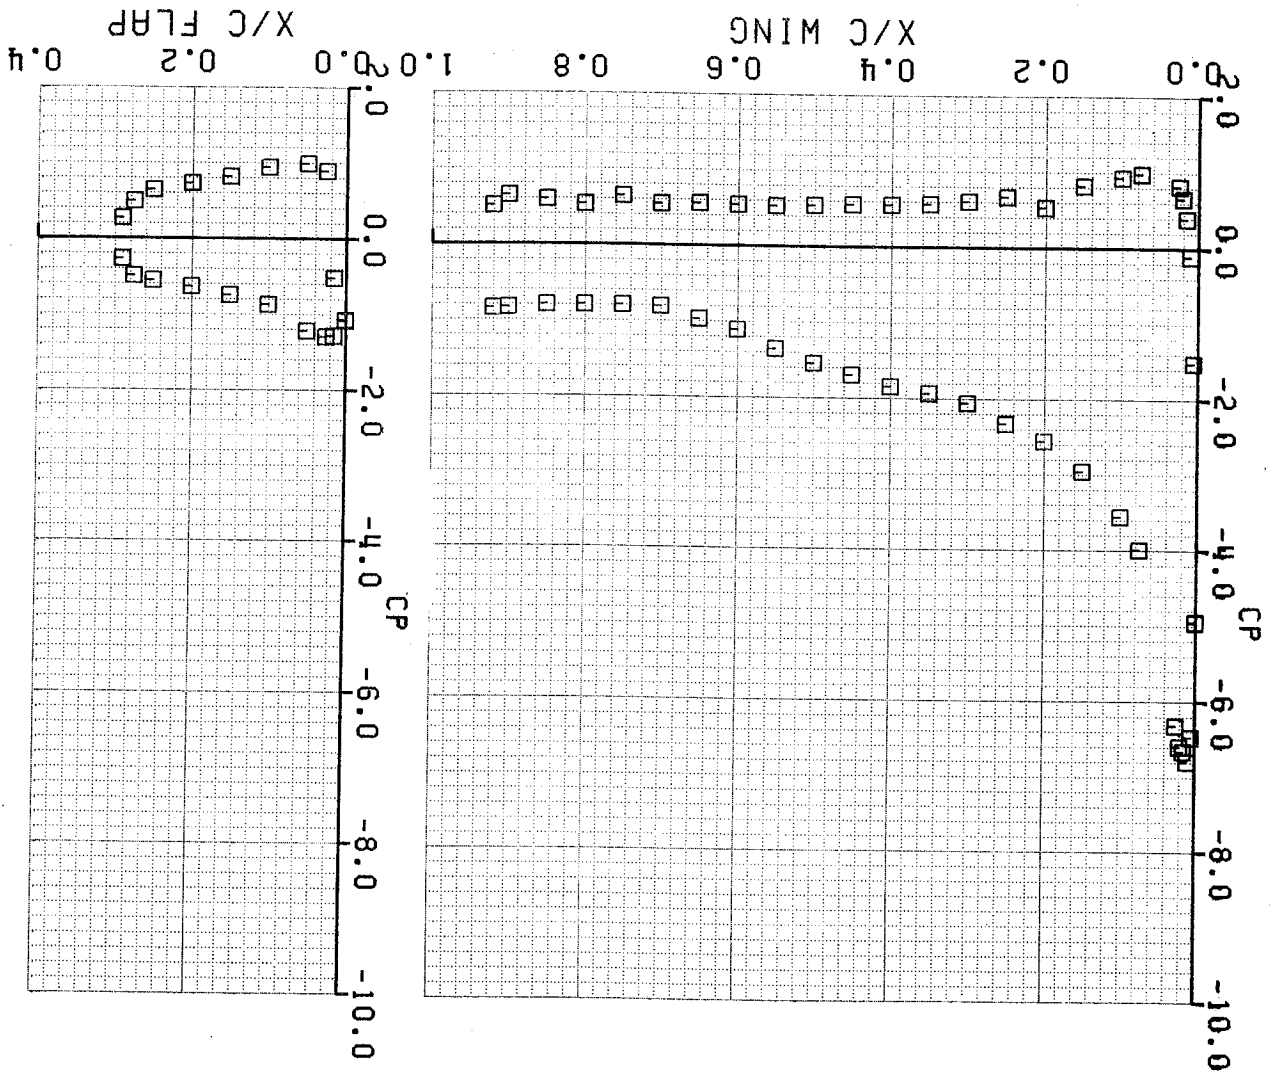

$\delta$	$\tau$	G/C	OH/C
40°	0.015	0.025	

$\alpha = 10^\circ$

ORIGINAL PAGE IS  
OF POOR QUALITY

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	$(G/C)_f$	$(OH/C)_f$
$40^\circ$	0.015	0.0

$$\alpha = 3.97^\circ$$

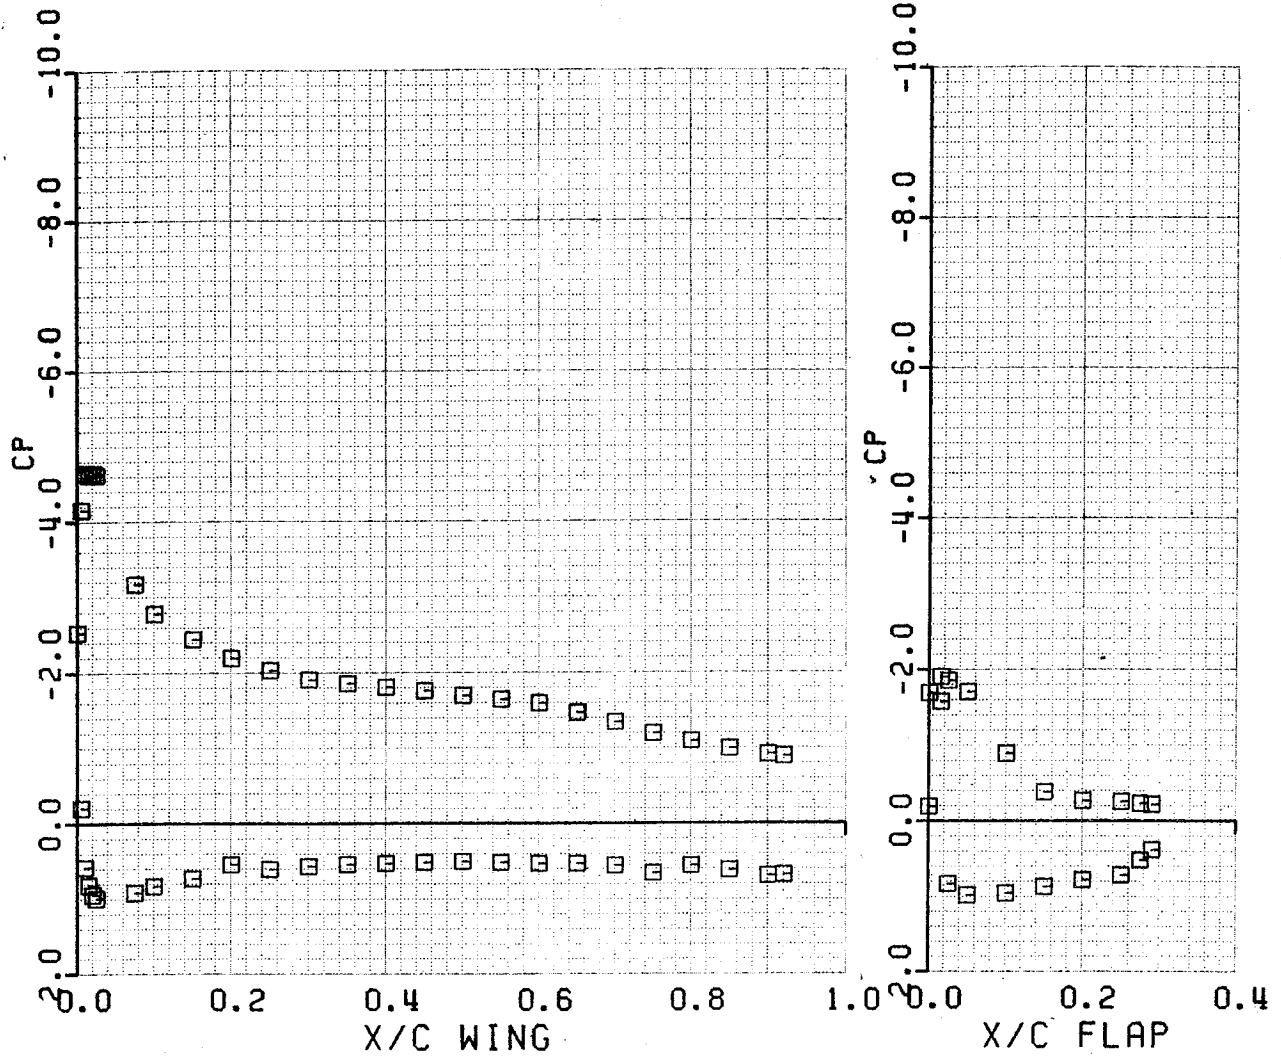


FIGURE 20. GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. C-4



ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	$(G/C)_f$	$(OH/C)_f$
$40^\circ$	0.015	0.0

$$\alpha = 7.97^\circ$$


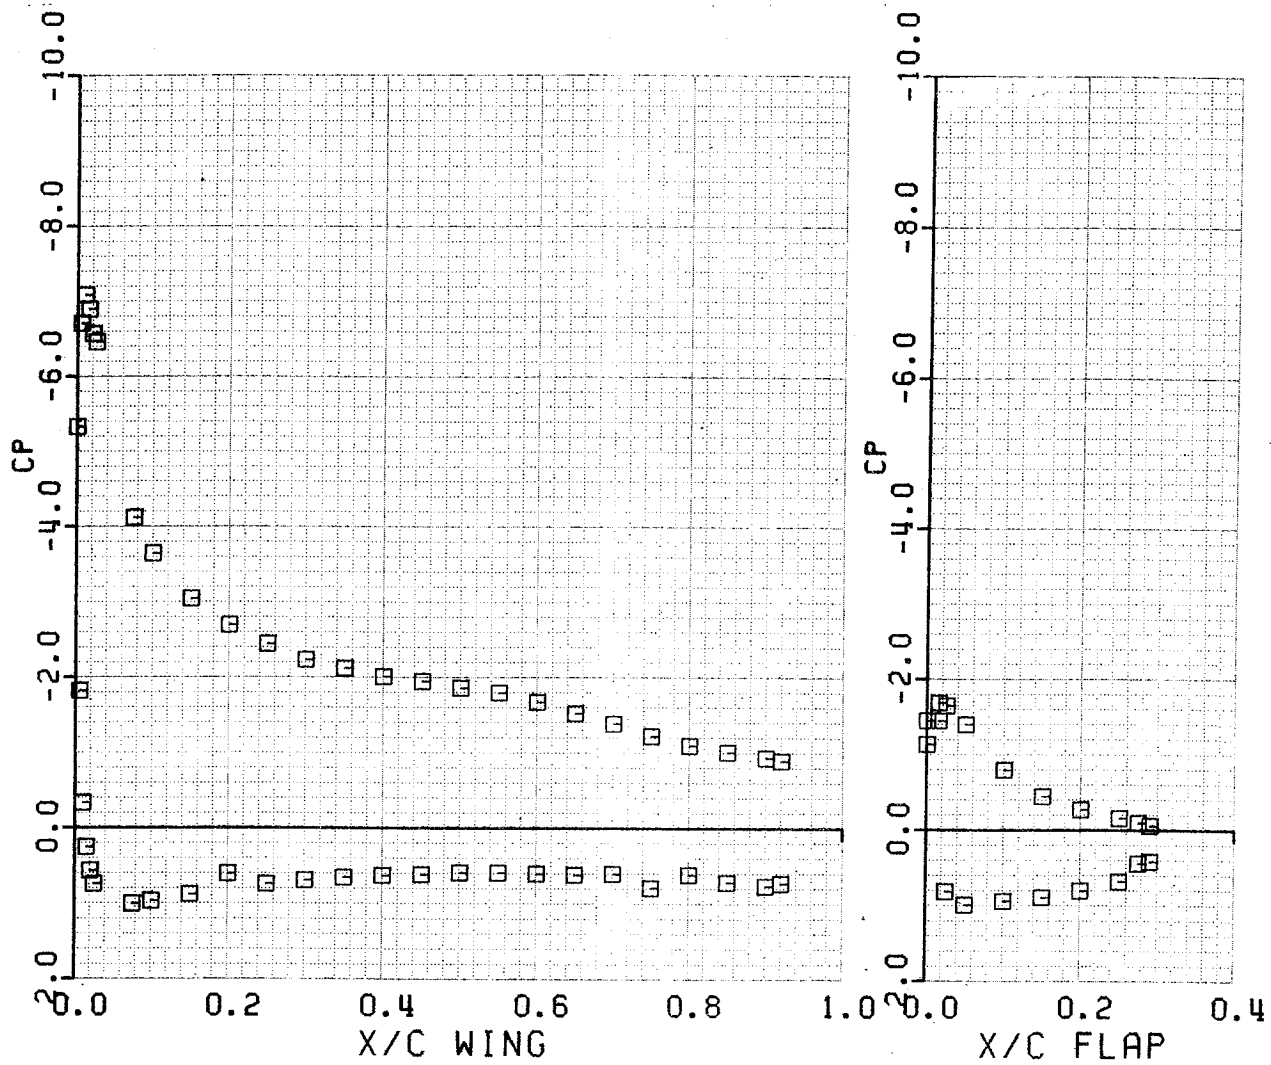


FIGURE 21. GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. C-5

FIGURE 22. GAW-1 AIRFOIL CONFIGURATION FOR LV-  
SURVEYS-PRESSURE DISTRIBUTION, CONFIG. C-6

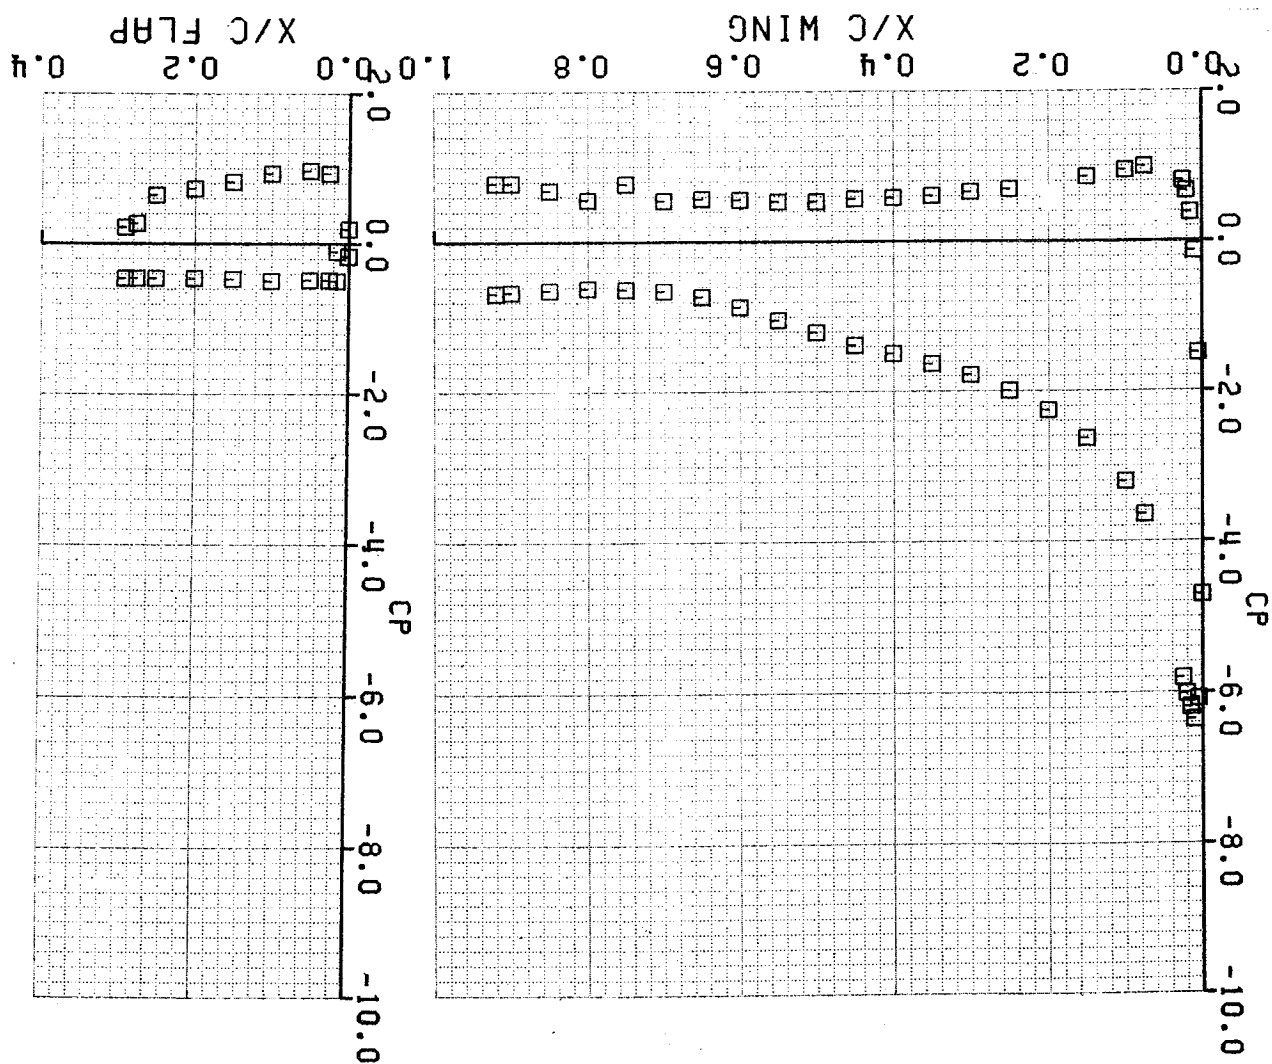

$\delta_f$	$(g/c)_f$	$(oh/c)_f$
40°	0.015	0.0

$$\alpha = 11.05^\circ$$

ORIGINAL PAGE IS  
OF POOR QUALITY

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_s$	G/C	OH/C
$27^\circ$	0.023	0.028

$$\alpha = 17.90^\circ$$

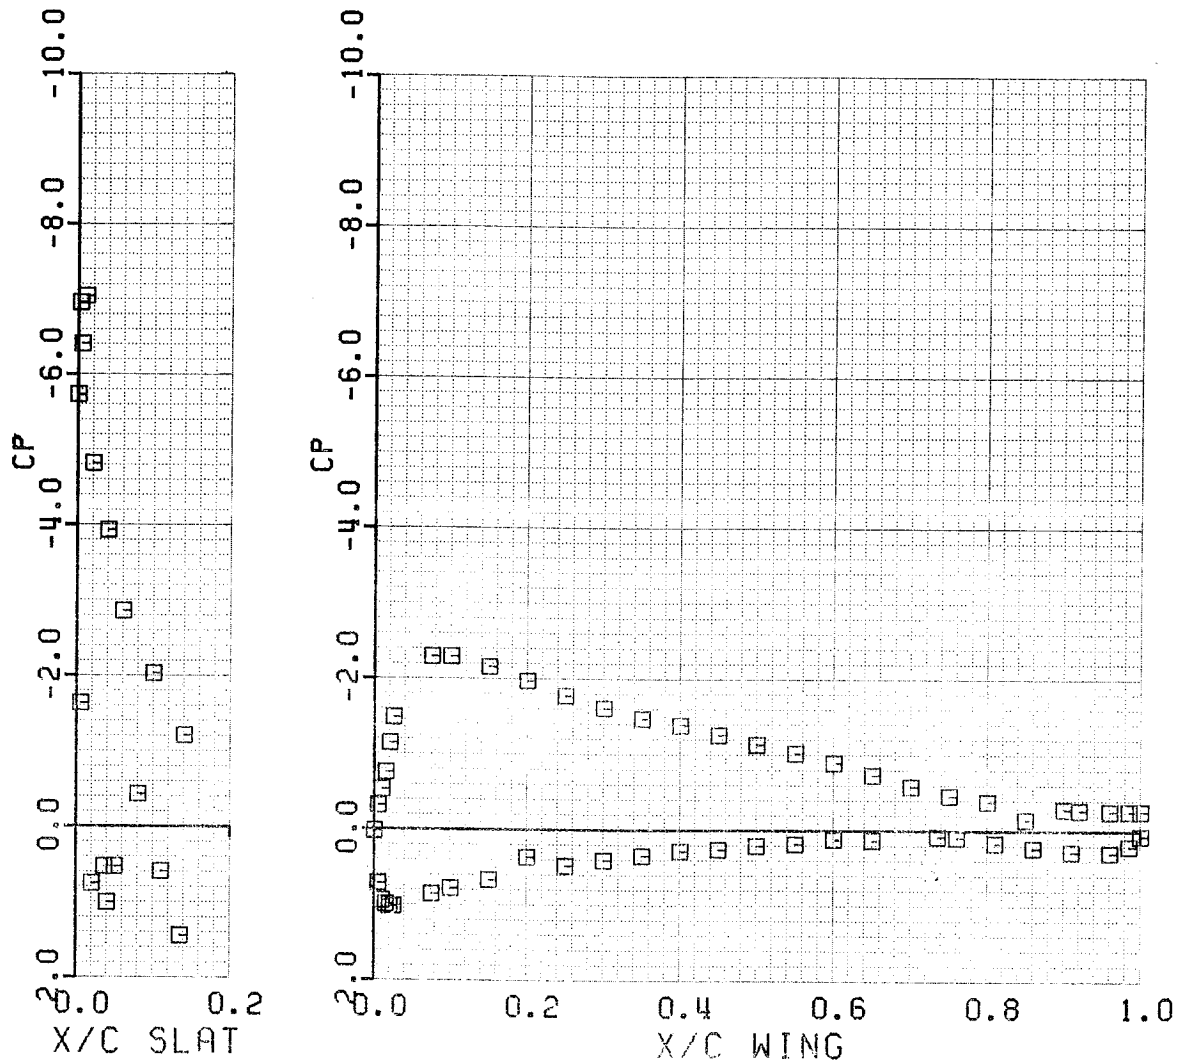


FIGURE 23 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. D-1

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_s$	G/C	OH/C
27°	0.023	0.028

$$\alpha = 21.48^\circ$$

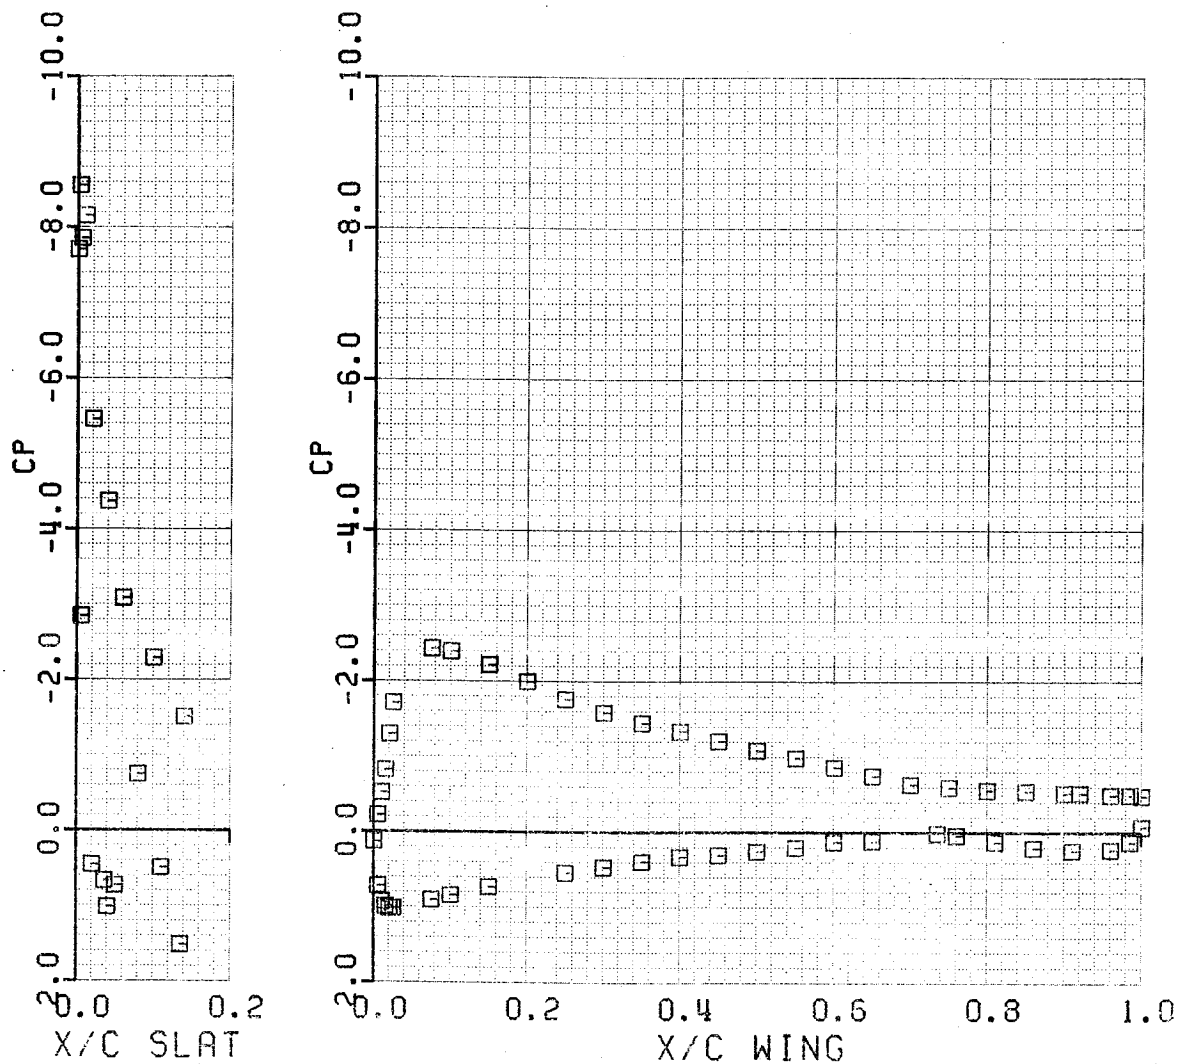


FIGURE 24 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. D-2.

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_s$	G/C	OH/C
$27^\circ$	0.023	0.028

$$\alpha = 23.03^\circ$$

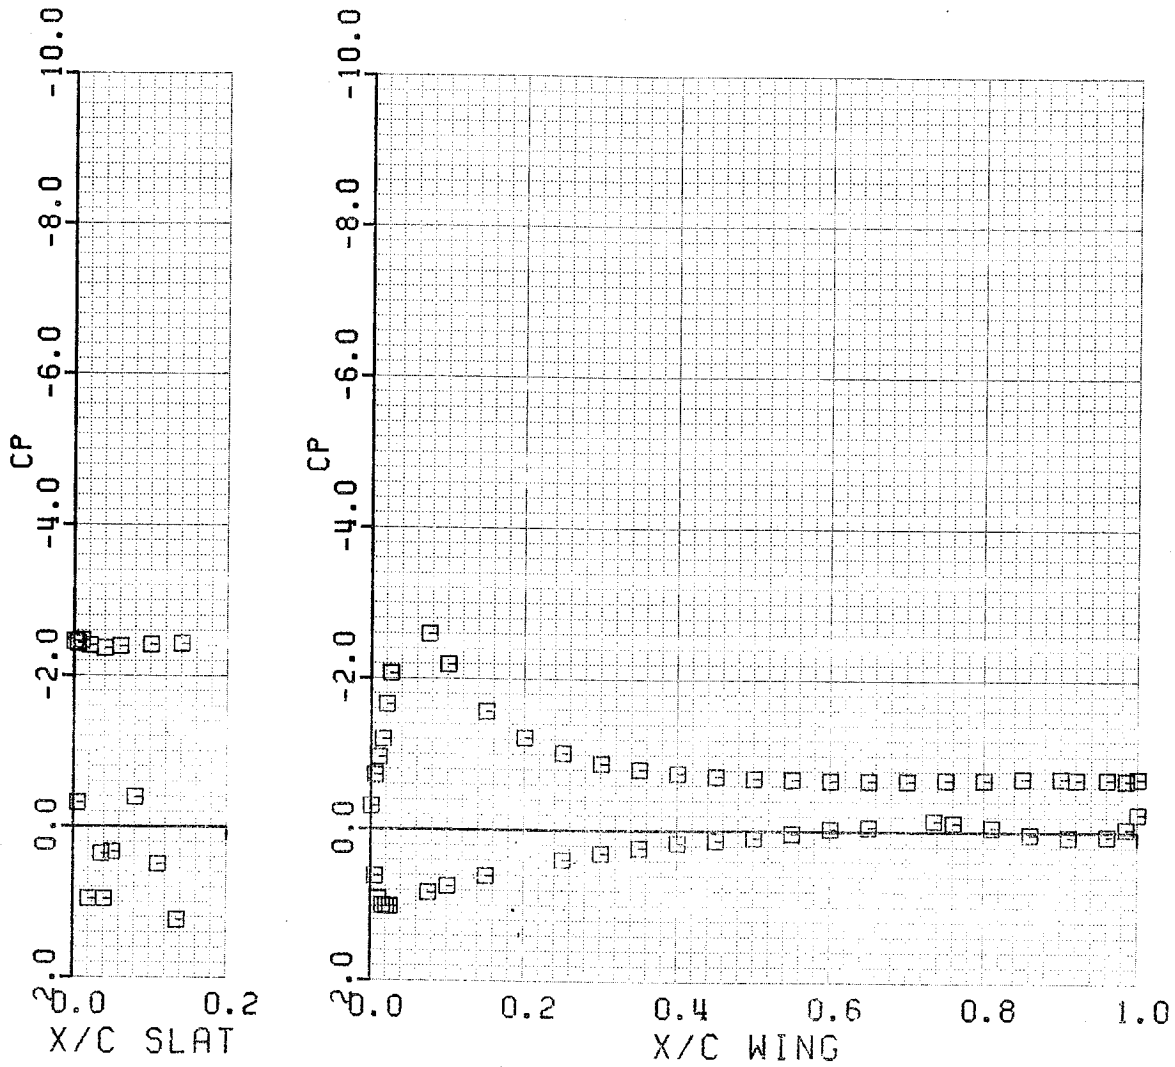


FIGURE 25 GAW-1 AIRFOIL CONFIGURATION for LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. D-3

$\delta_f$	G/C	OH/C	$\delta_s$	G/C	OH/C
30°	0.025	0.0	42°	0.015	0.015

$$\alpha = 12^\circ$$




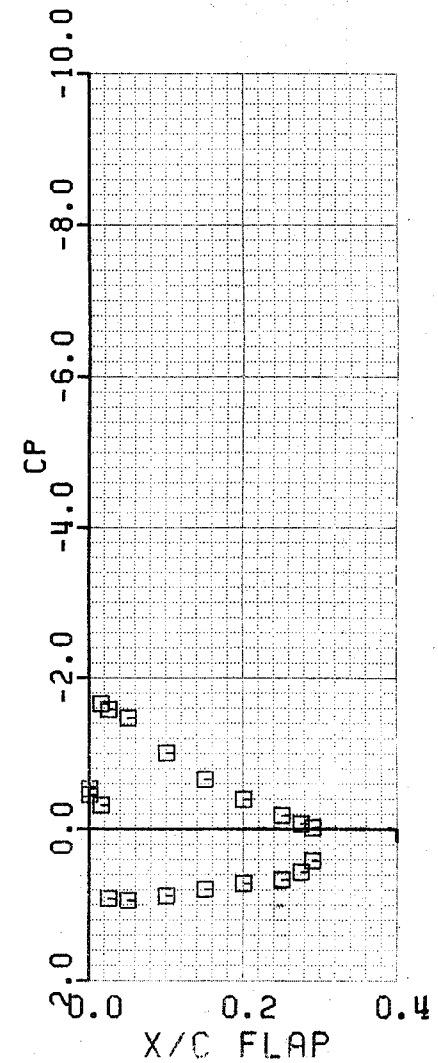


FIGURE 26 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-PRESSURE DISTRIBUTION, CONFIG. E-1

ORIGINAL PAGE IS  
OF POOR QUALITY

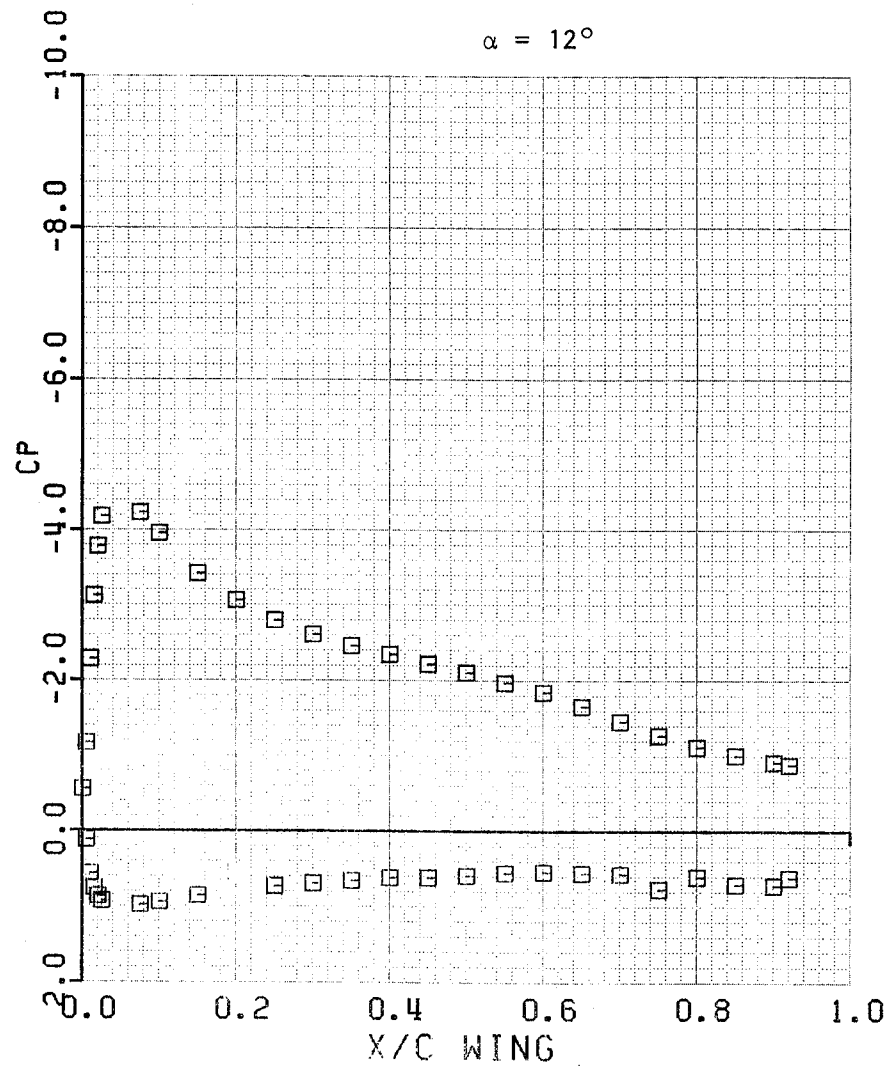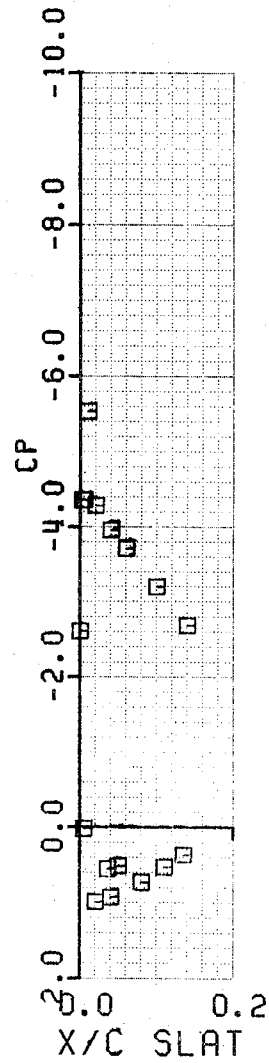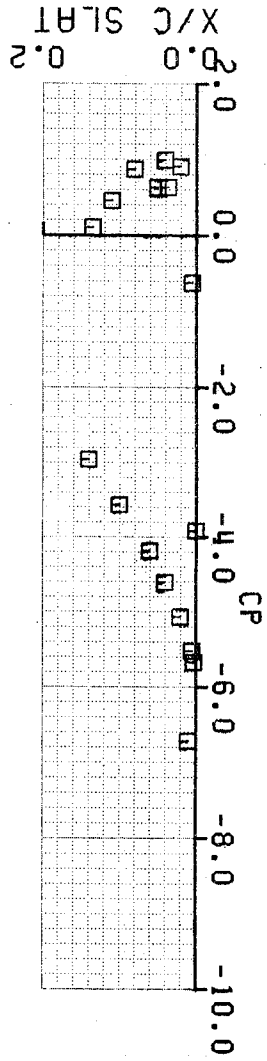

$\delta_f$	G/C	OH/C
30°	0.025	0.0
$\delta_s$	G/C	OH/C
42°	0.015	0.015

$$\alpha = 14.06^\circ$$

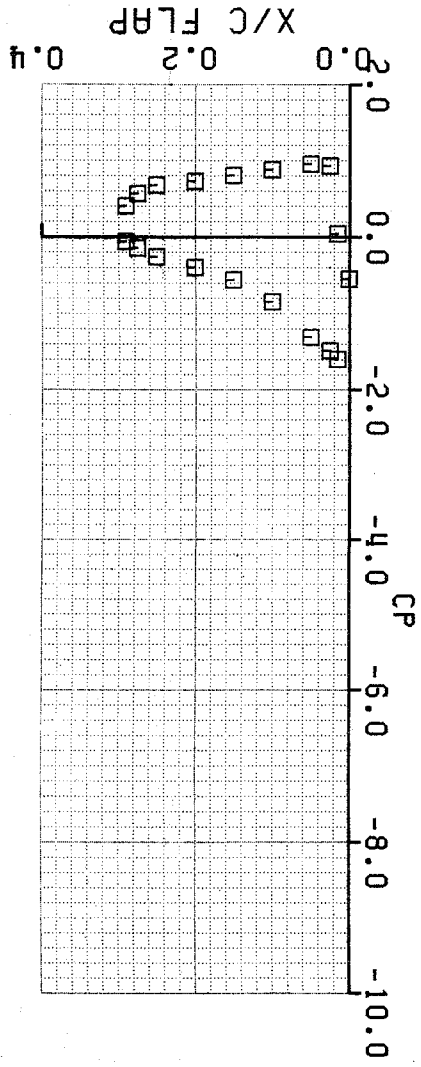
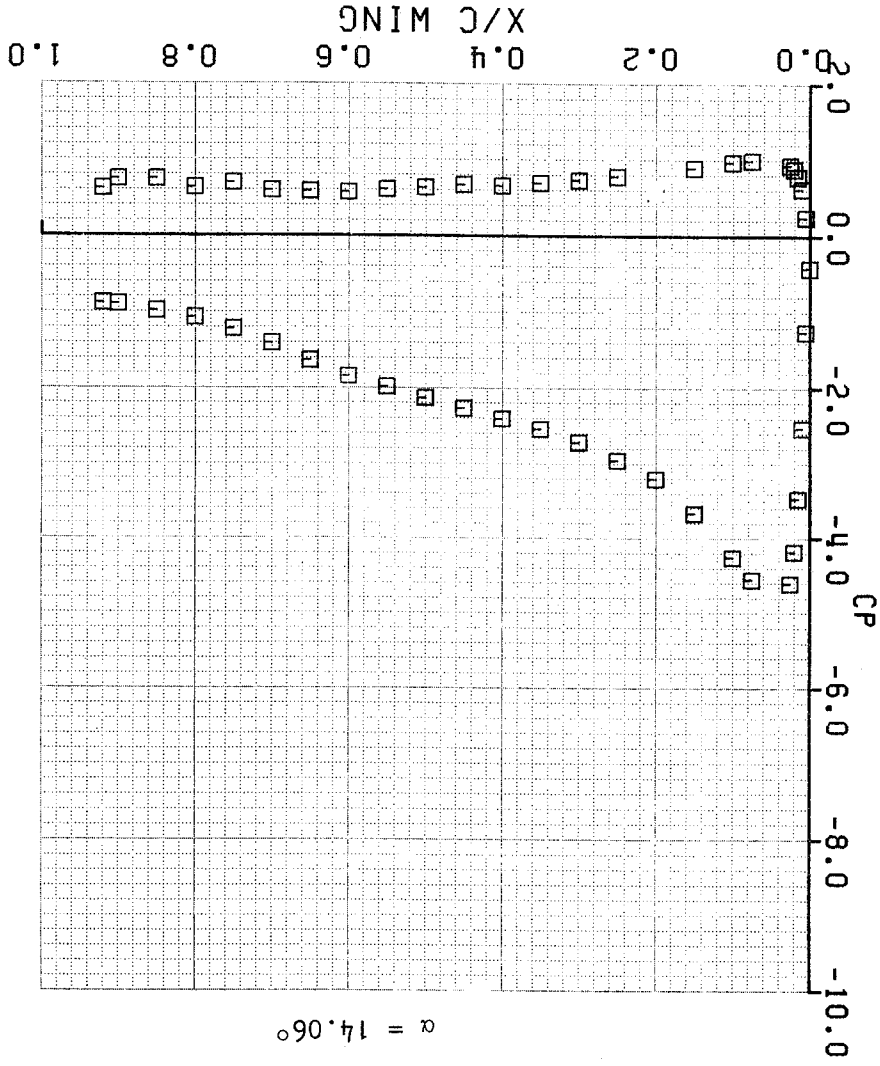


FIGURE 27 GAW-1 AIRFOIL CONFIGURATION FOR LV-  
SURVEYS-PRESSURE DISTRIBUTION, CONFIG. E-2

ORIGINAL PAGE IS  
OF POOR QUALITY

$\delta_f$	G/C	OH/C	$\delta_s$	G/C	OH/C
30°	0.025	0.0	42°	0.015	0.015

$$\alpha = 16.07^\circ$$


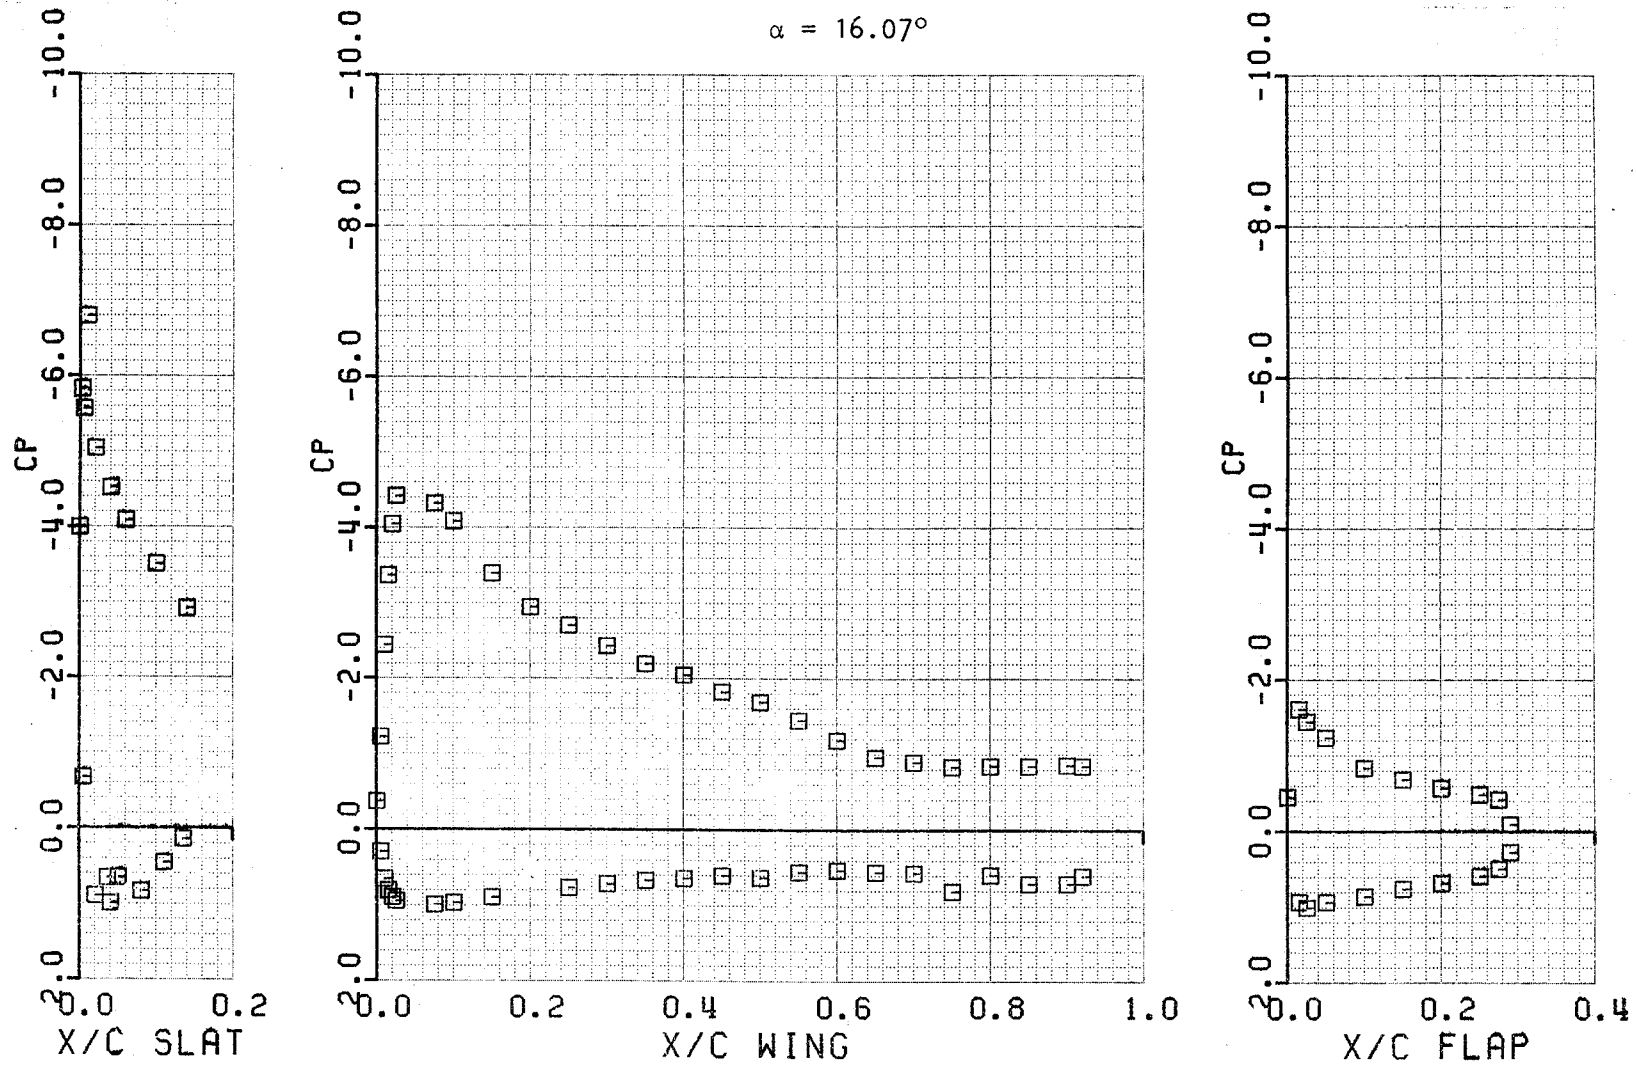


FIGURE 28 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS - PRESSURE DISTRIBUTION, CONFIG. E-3

ORIGINAL PAGE IS  
OF POOR QUALITY



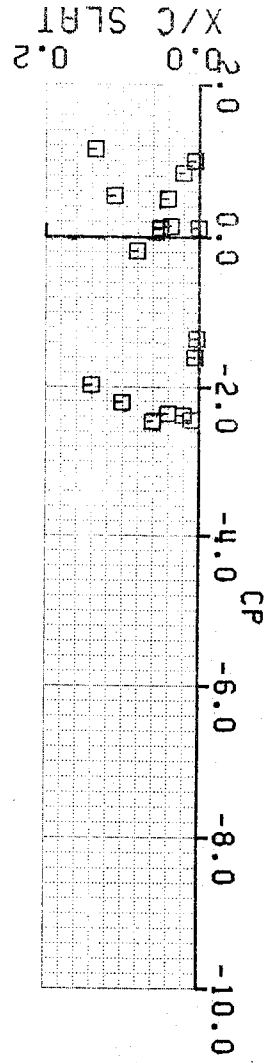

$\delta f_o$	0.015	0.025	$\delta_s$	0.015	0.015
G/C	0.015	0.025	G/C	0.015	0.015
OH/C	0.015	0.025	OH/C	0.015	0.015

$\alpha = 5.3^\circ$





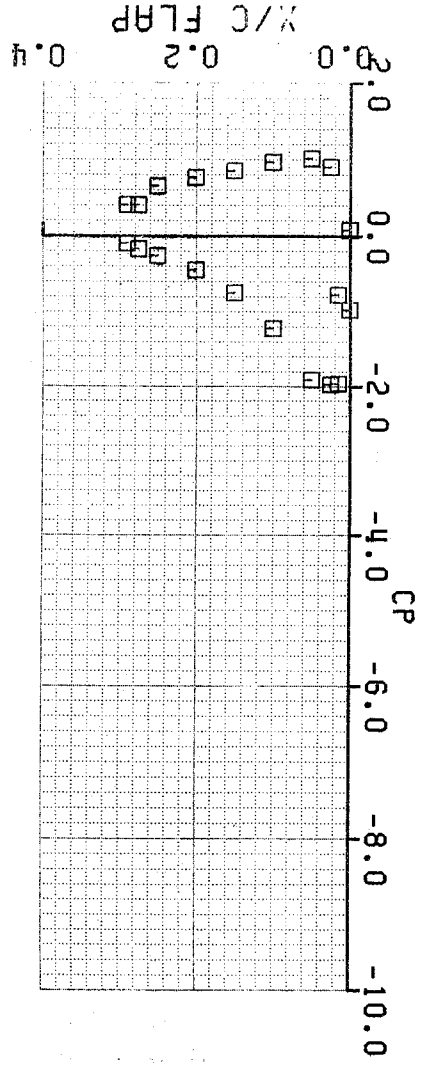


FIGURE 29 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. F-1

ORIGINAL PAGE IS  
OF POOR QUALITY

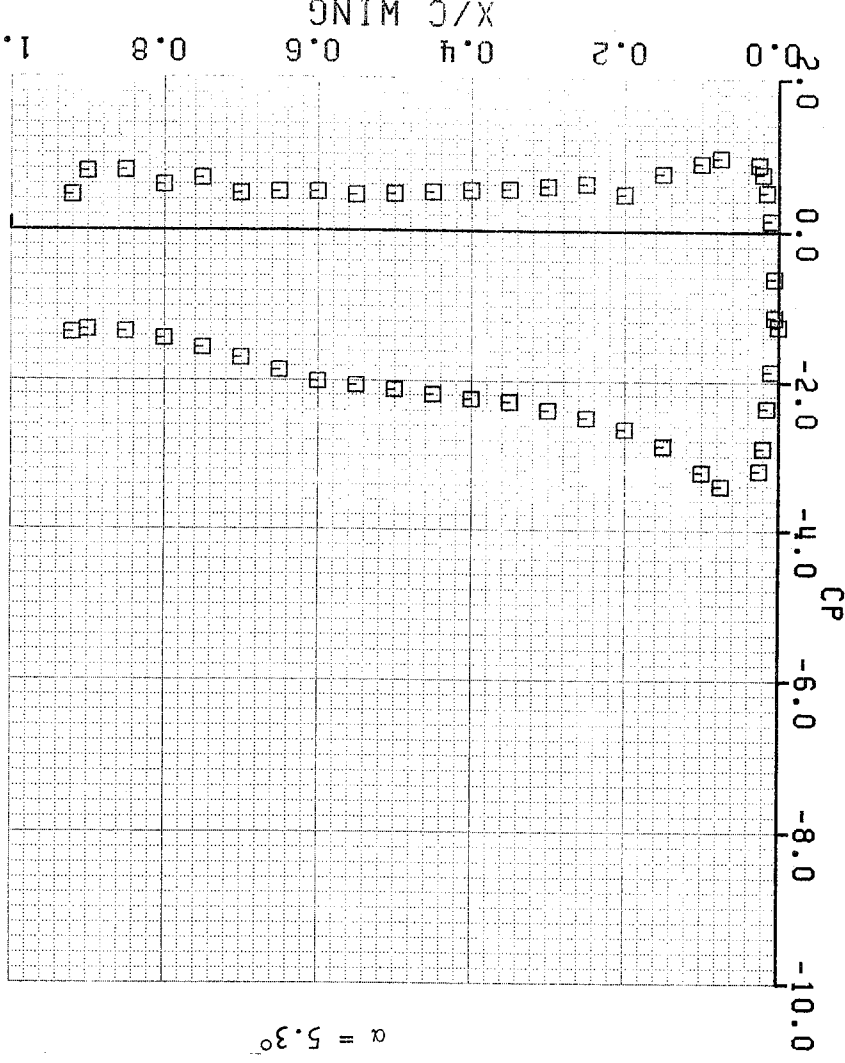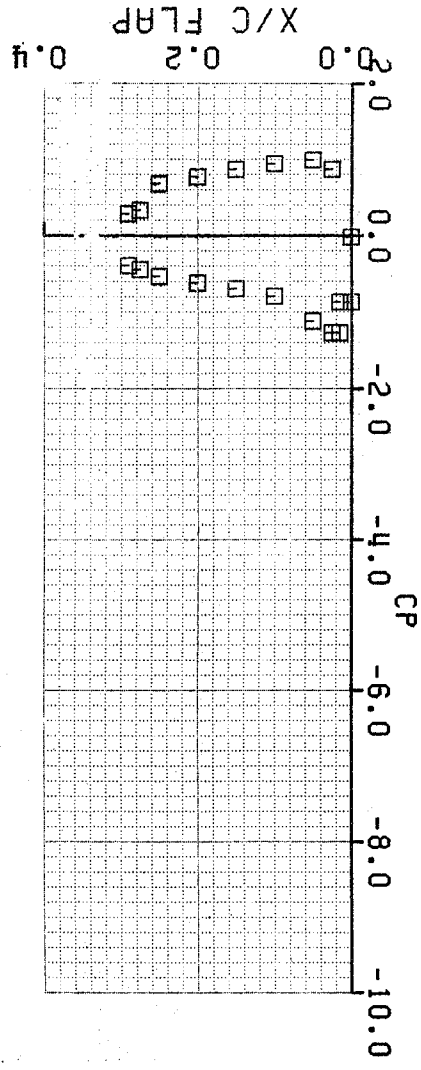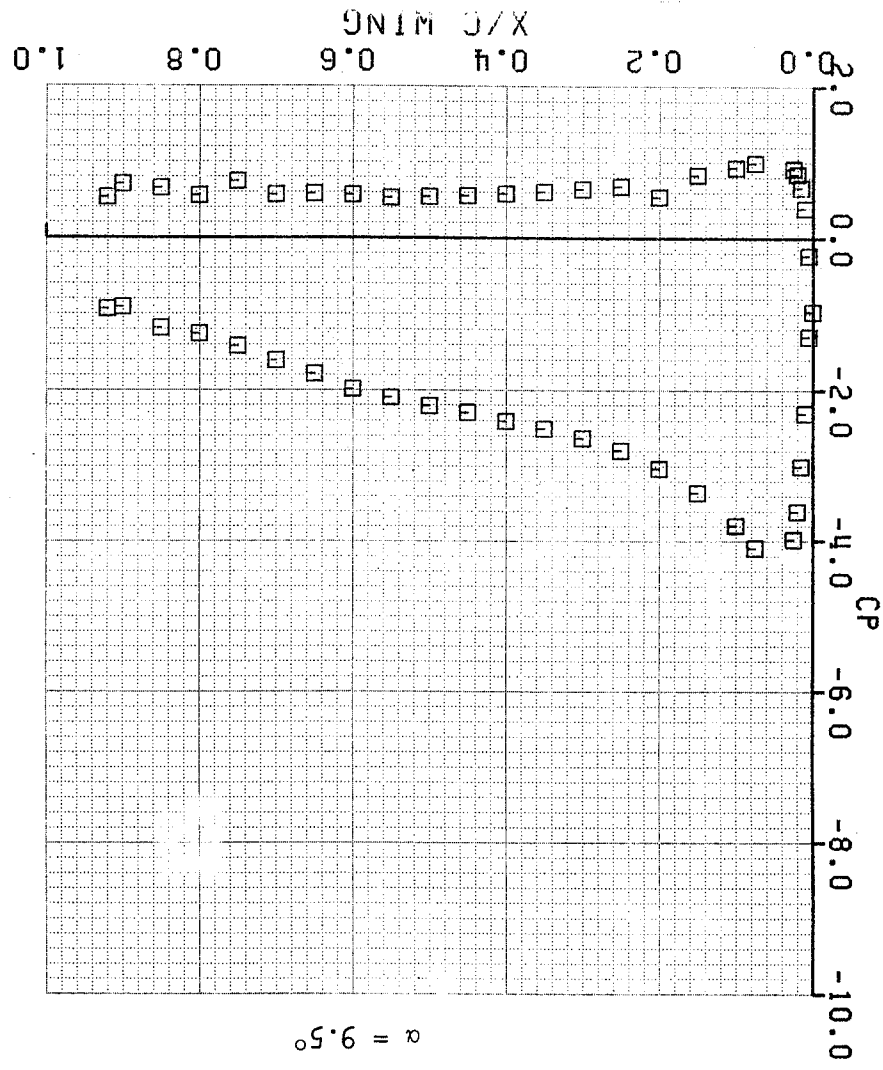
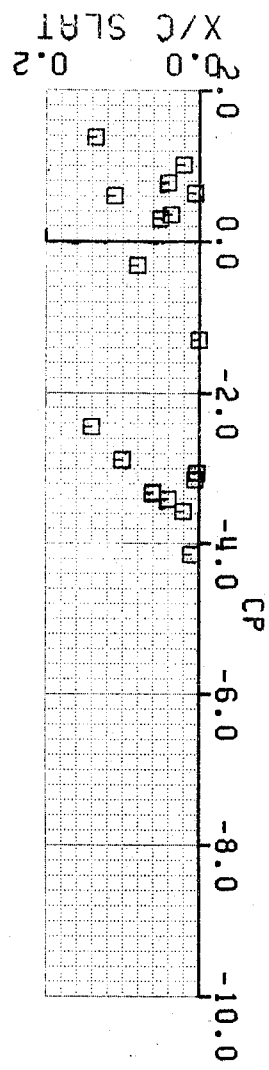


$\delta_f$	G/C	OH/C	$\delta_s$	G/C	OH/C
40°	0.015	0.025	42	0.015	0.015

$\alpha = 9.5^\circ$

FIGURE 30 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. F-2

ORIGINAL PAGE IS  
OF POOR QUALITY

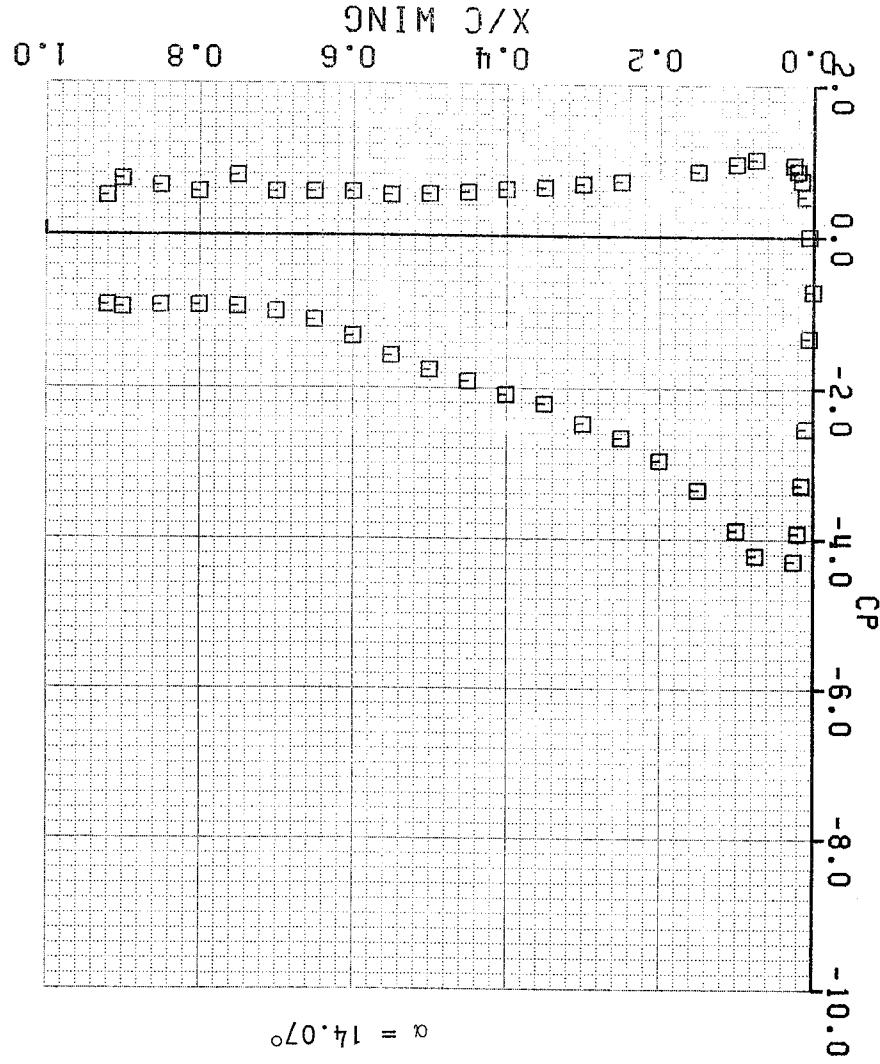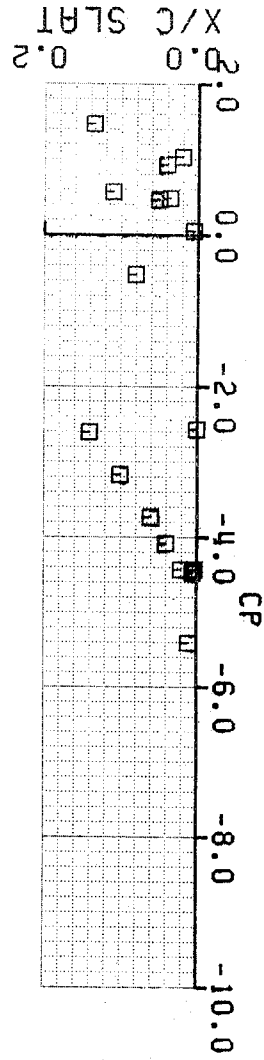

$\delta_f$	G/C	OH/C	$\delta_s$	G/C	OH/C
40°	0.015	0.025	42°	0.015	0.015

$\alpha = 14.07^\circ$

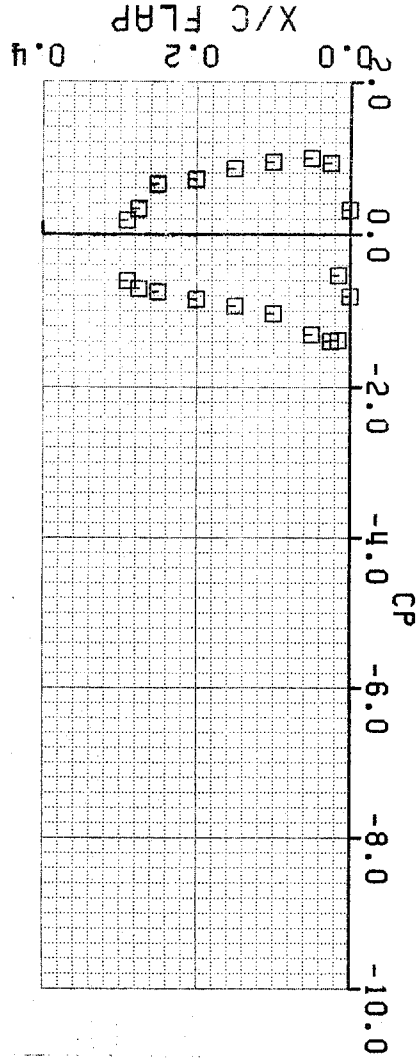


FIGURE 31 GAW-1 AIRFOIL CONFIGURATION FOR LV-SURVEYS-  
PRESSURE DISTRIBUTION, CONFIG. F-3

ORIGINAL PAGE IS  
OF POOR QUALITY

ORIGINAL PAGE IS  
OF POOR QUALITY

○ SINGLE-ELEMENT CONFIG. A

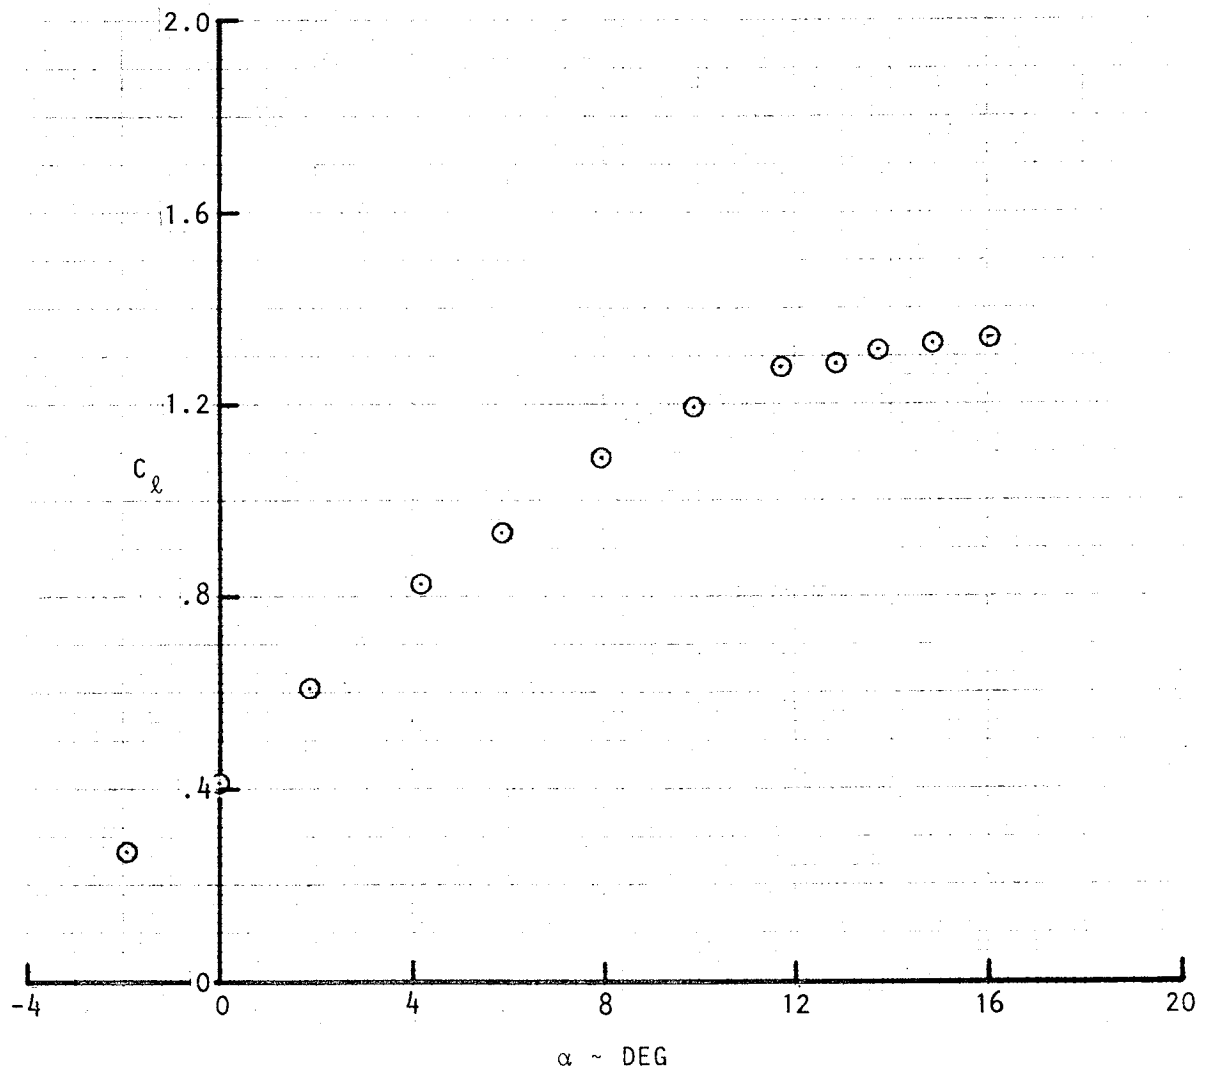


FIGURE 32 VARIATION OF LIFT COEFFICIENT WITH  
ANGLE-OF-ATTACK, GAW-1 AIRFOIL

SYM	$\delta_f$	G/C	OH/C	CONFIG.
○	30°	0.040	0.0	B(1-3)
□	30°	0.025	0.0	B(4-6)

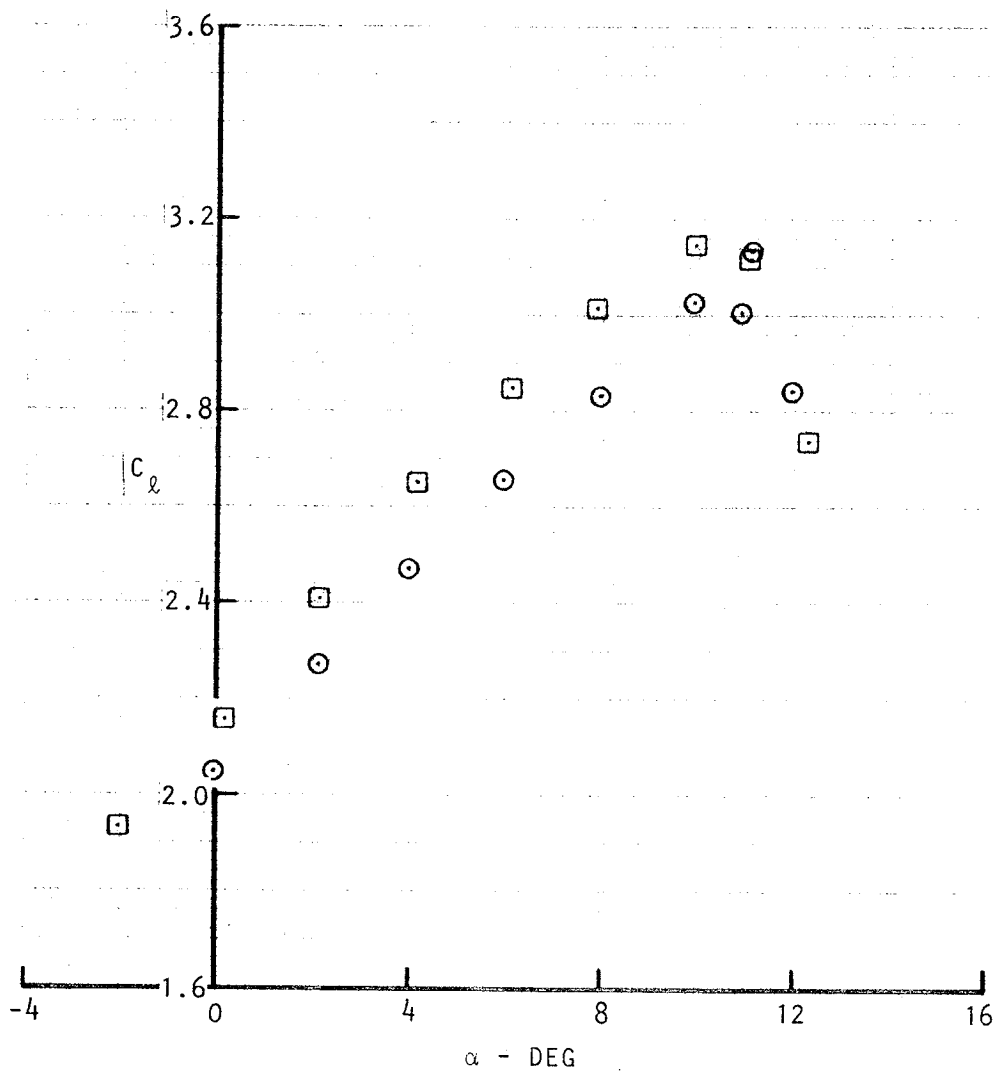


FIGURE 33 VARIATION OF LIFT COEFFICIENT WITH  
ANGLE-OF-ATTACK, GAW-1 AIRFOIL

ORIGINAL PAGE IS  
OF POOR QUALITY

SYM	$\delta_f$	G/C	OH/C	CONFIG.
○	40	.015	.025	C(1-3)
□	40	.015	0.0	C(4-6)

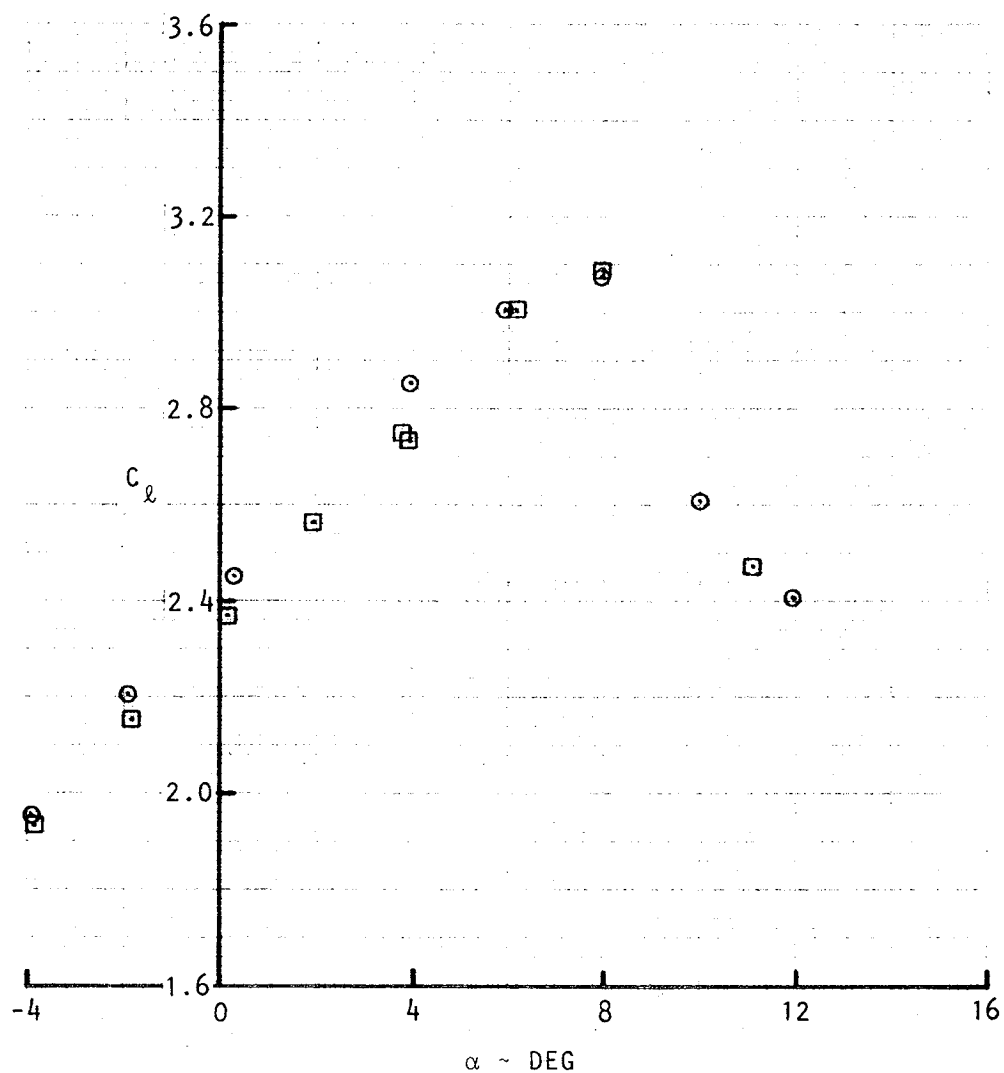


FIGURE 34 VARIATION OF LIFT COEFFICIENT WITH  
ANGLE-OF-ATTACK, GAW-1 AIRFOIL, CONFIG. C

ORIGINAL PAGE IS  
OF POOR QUALITY

SYM	$\delta_f$	G/C	OH/C	$\delta_s$	G/C	OH/C	CONFIG
○	0.0	—	—	27°	.023	.028	(D)
□	30°	0.025	0.0	42	.015	.015	(E)
△	40	0.015	0.025	42	.015	.015	(F)

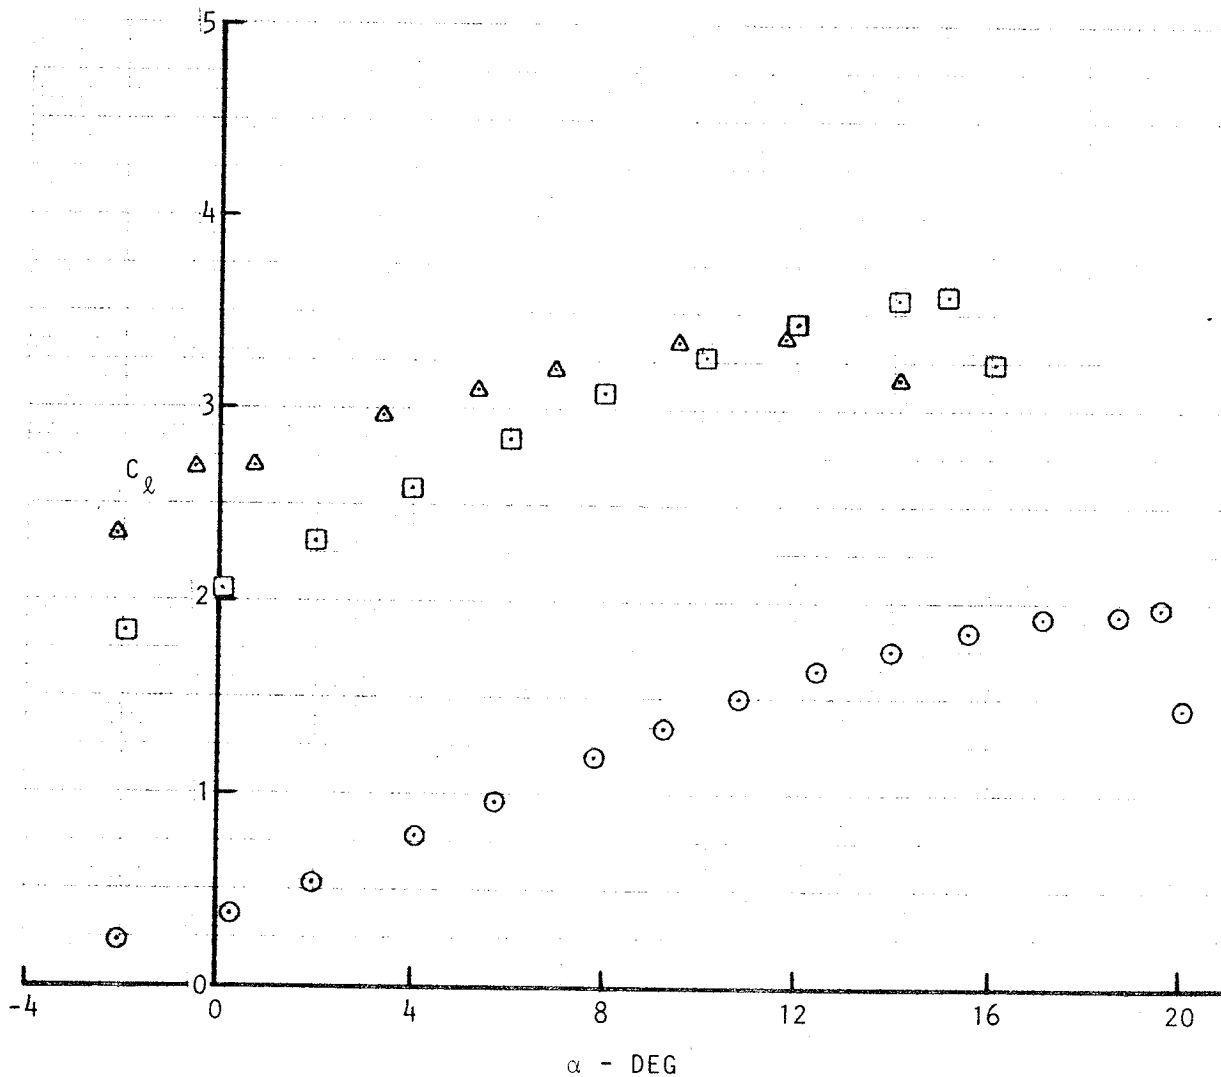


FIGURE 35 VARIATION OF LIFT COEFFICIENT WITH  
ANGLE-OF-ATTACK, GAW-1 AIRFOIL

LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

ERF 027 GAW-1M ALPHA=-0.50 VELOCITY VECTORS

CONFIGURATION A-1

ORIGINAL PAGE IS  
OF POOR QUALITY

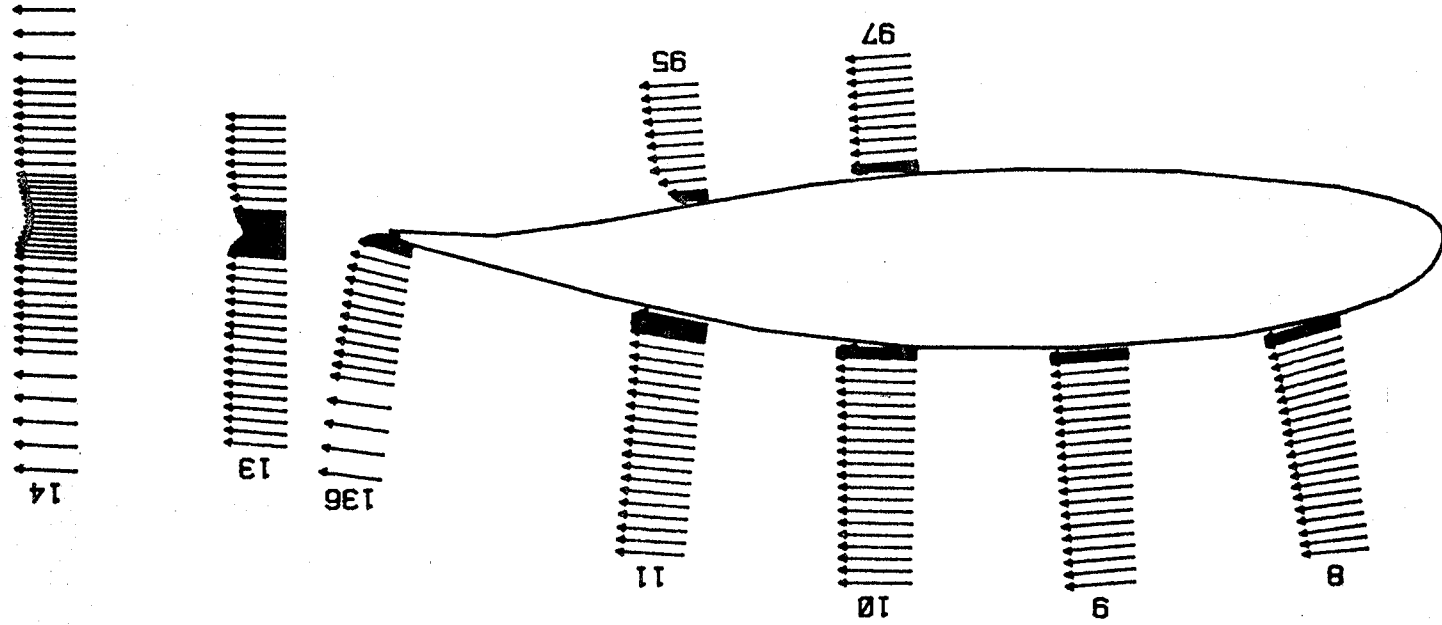


FIGURE 36



LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

ERF 027 GAW-1M ALPHA= 3.72 VELOCITY VECTORS

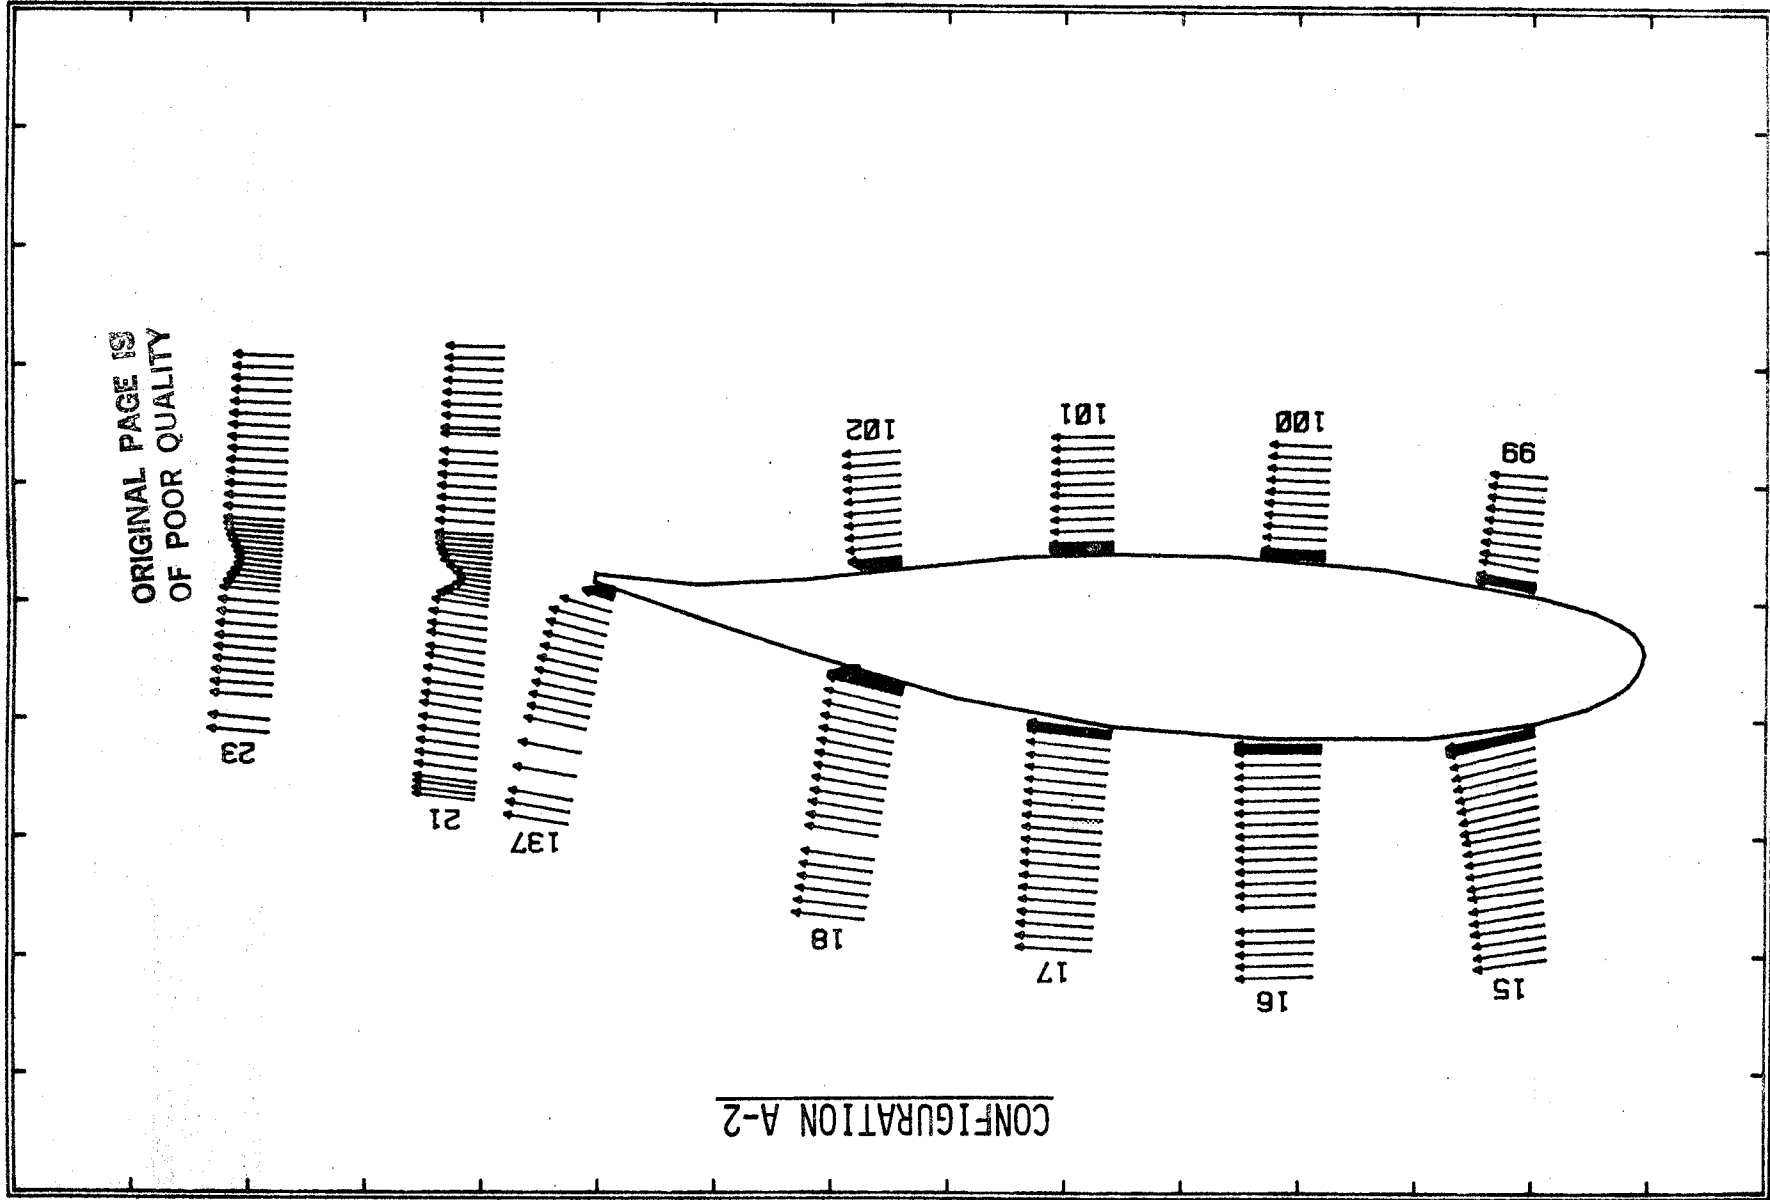


FIGURE 37

ERF 027 GAW-1M

ALPHA= 7.60 VELOCITY VECTORS

CONFIGURATION A-3

ORIGINAL PAGE IS  
OF POOR QUALITY

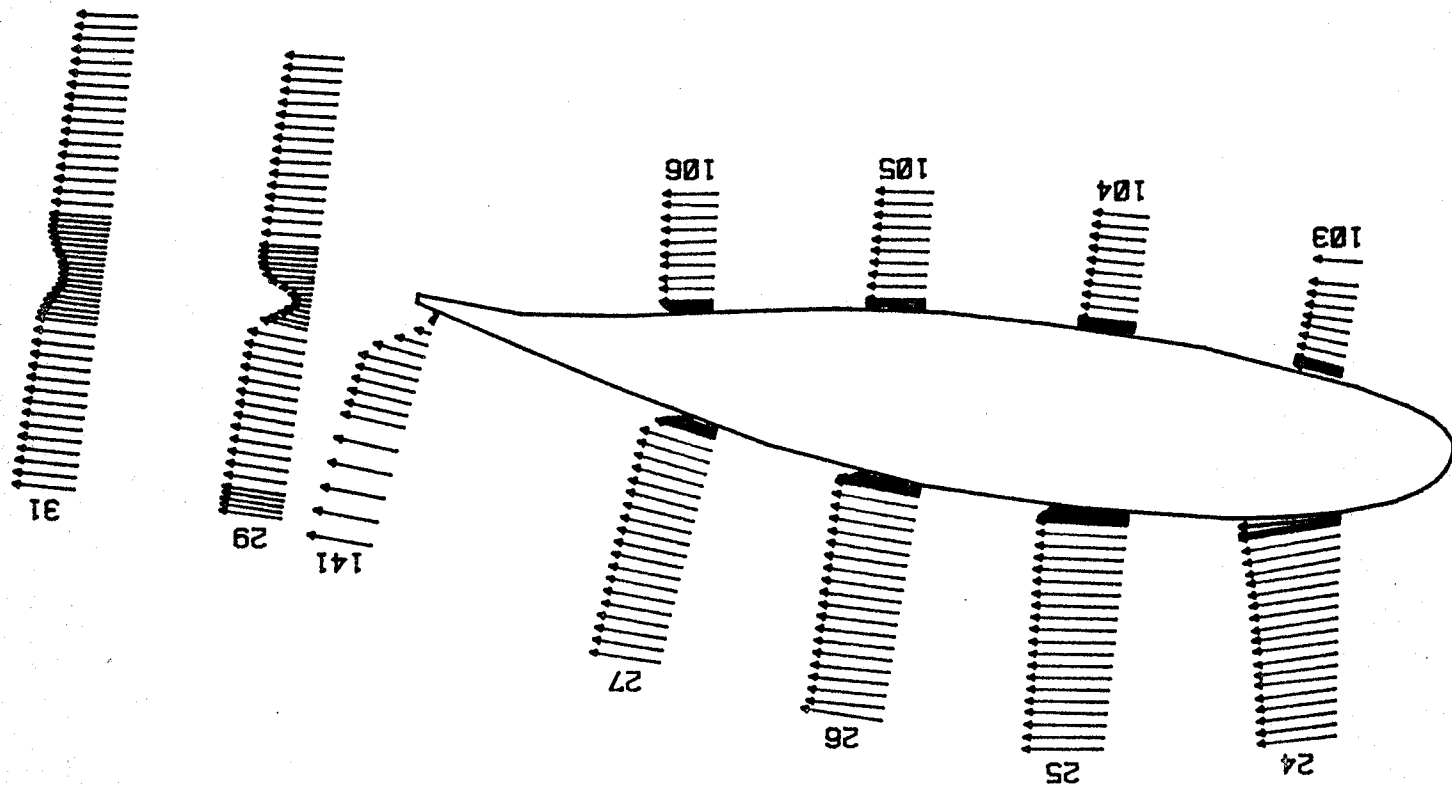


FIGURE 38

LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

ERF 027 GAW-1M ALPHA=11.48 VELOCITY VECTORS

CONFIGURATION A-4

ORIGINAL PAGE IS  
OF POOR QUALITY

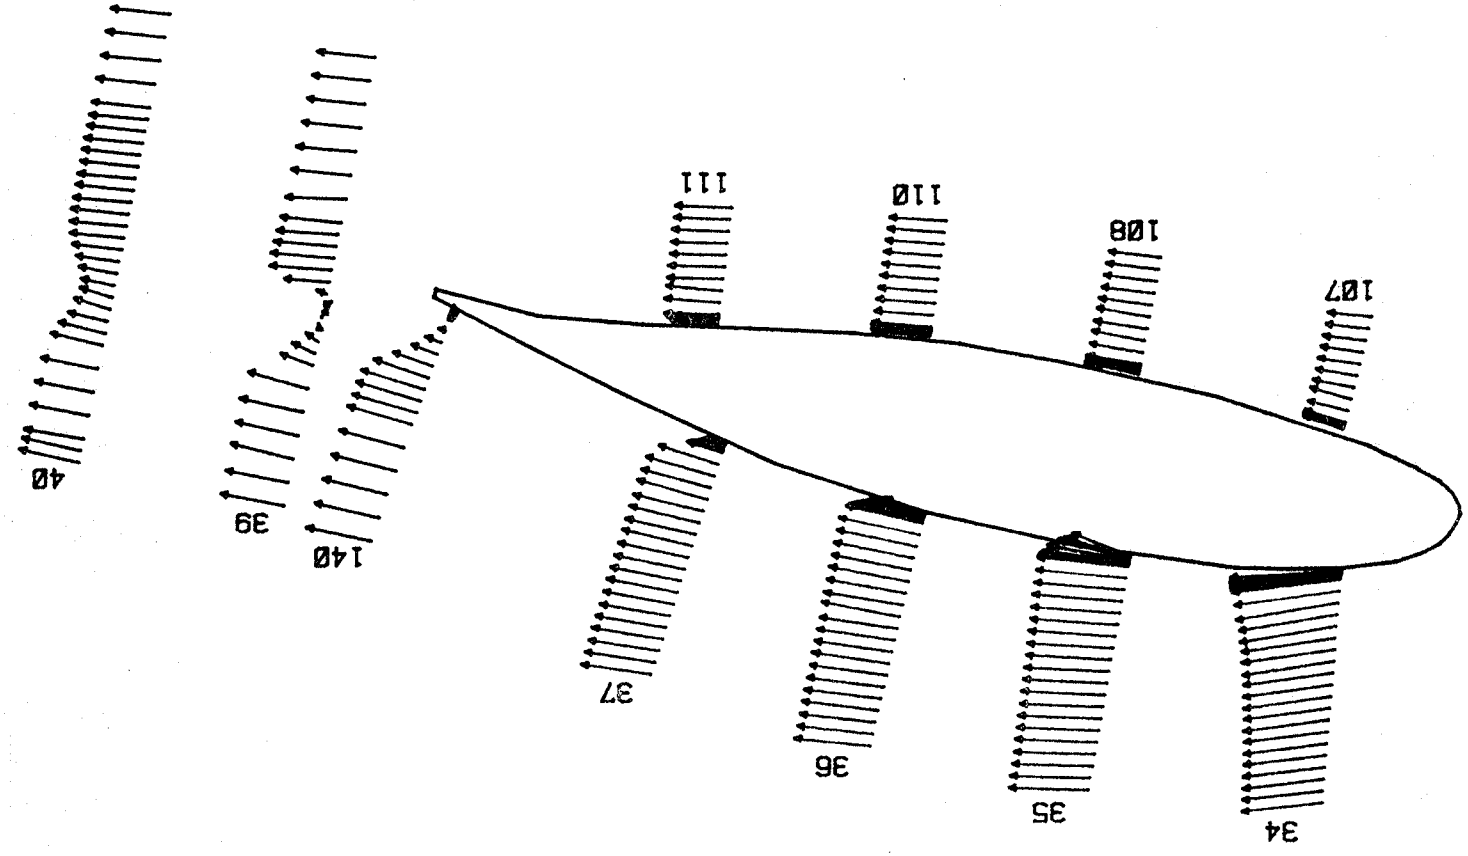


FIGURE 39

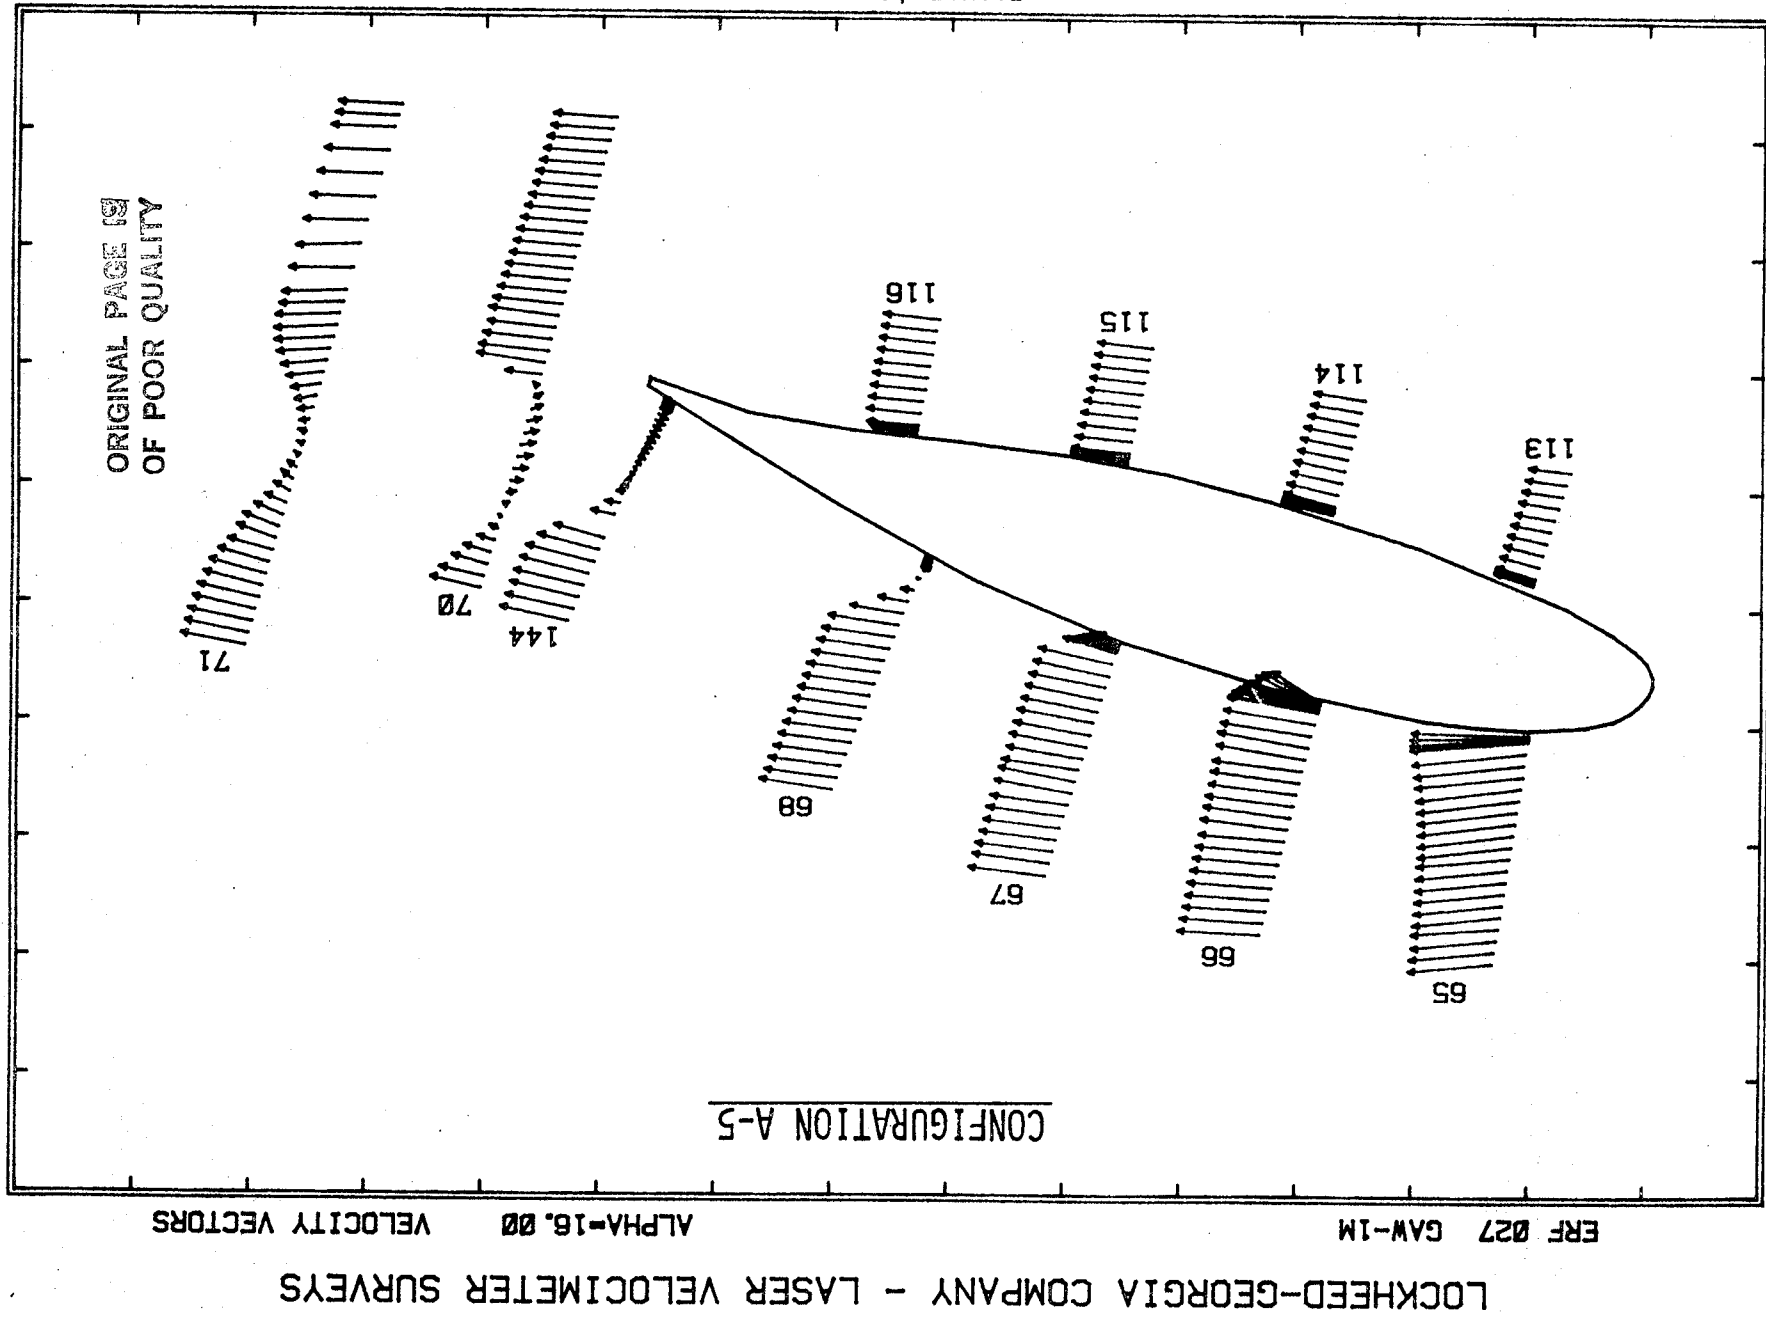


FIGURE 40

LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-30 G-0.040 OH-0.0 ALPHA= 4.00 VELOCITY VECTORS

CONFIGURATION B-1

ORIGINAL PAGE IS  
OF POOR QUALITY

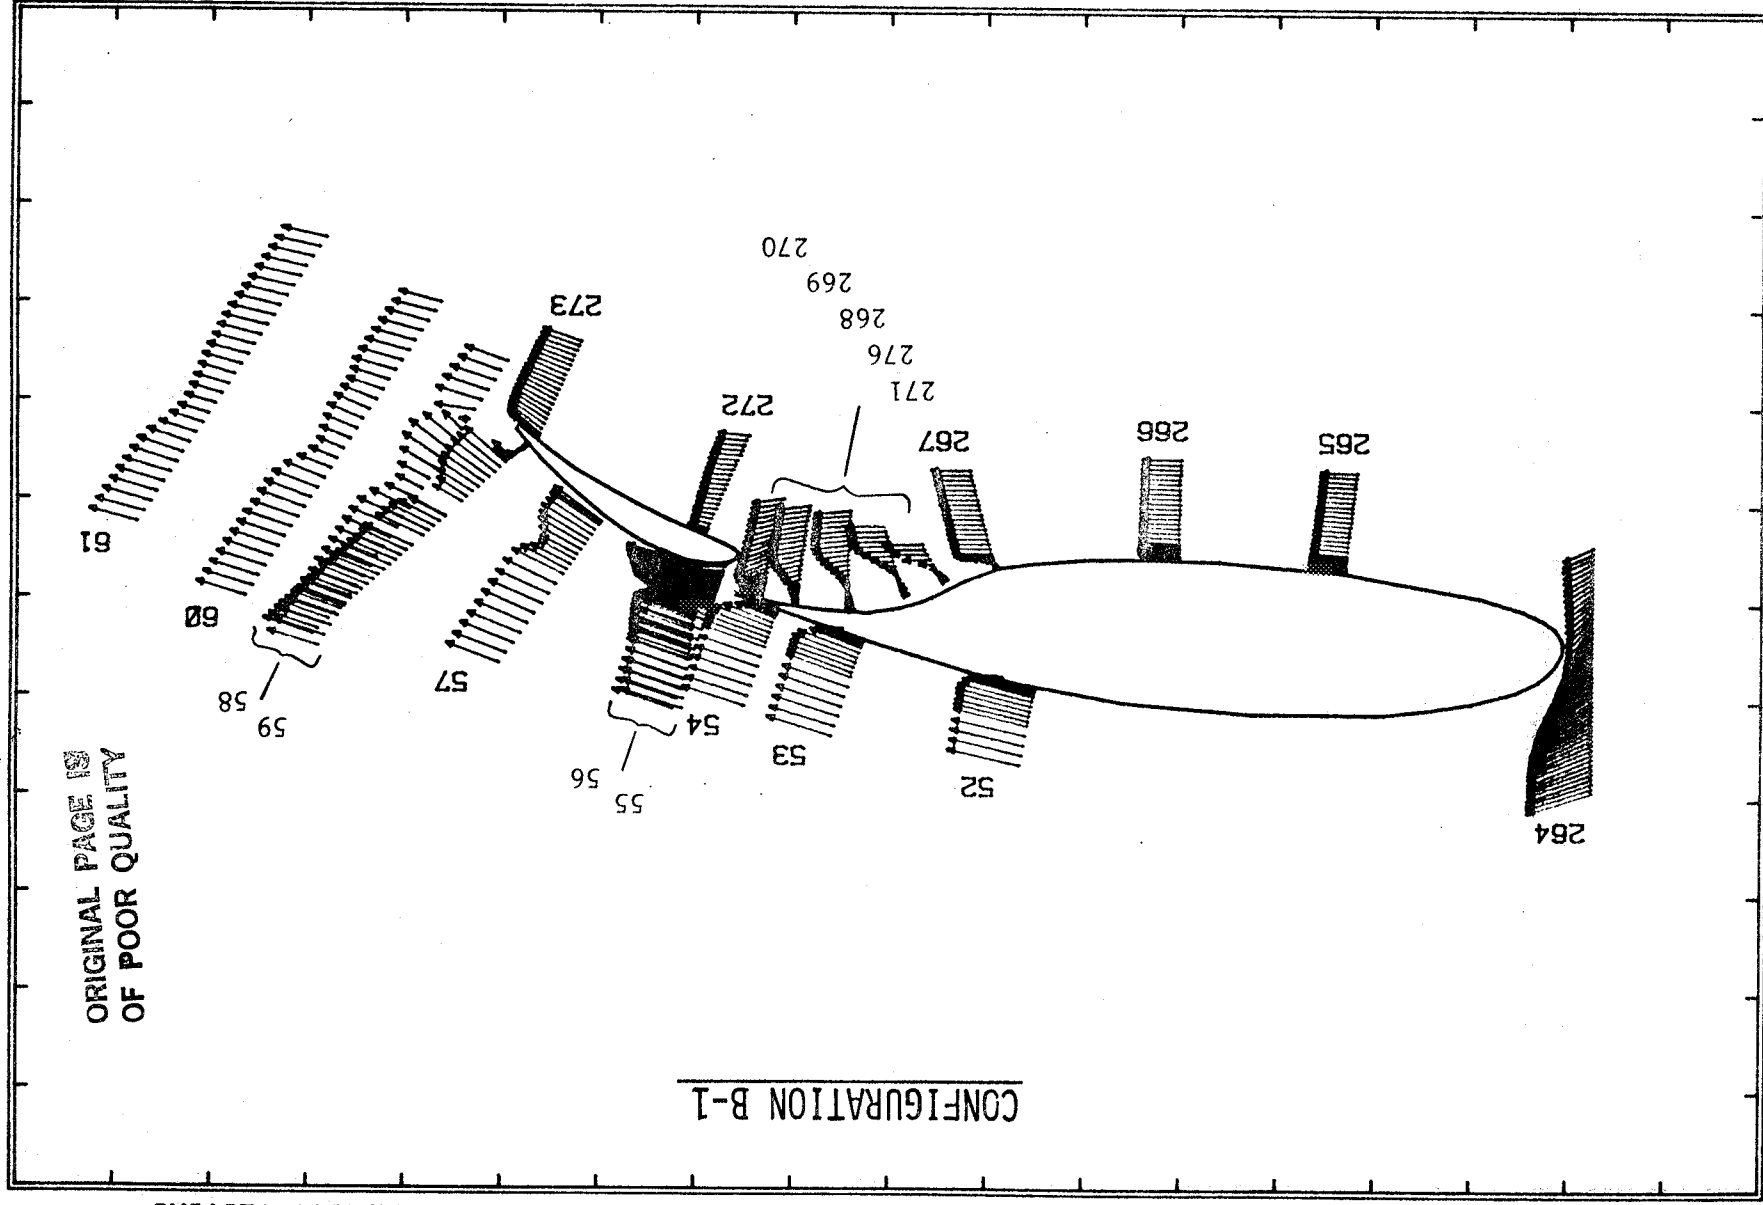


FIGURE 41

56  
215

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-30 G-0.040 OH-0.0

ALPHA= 8.00

VELOCITY VECTORS

## CONFIGURATION B-2

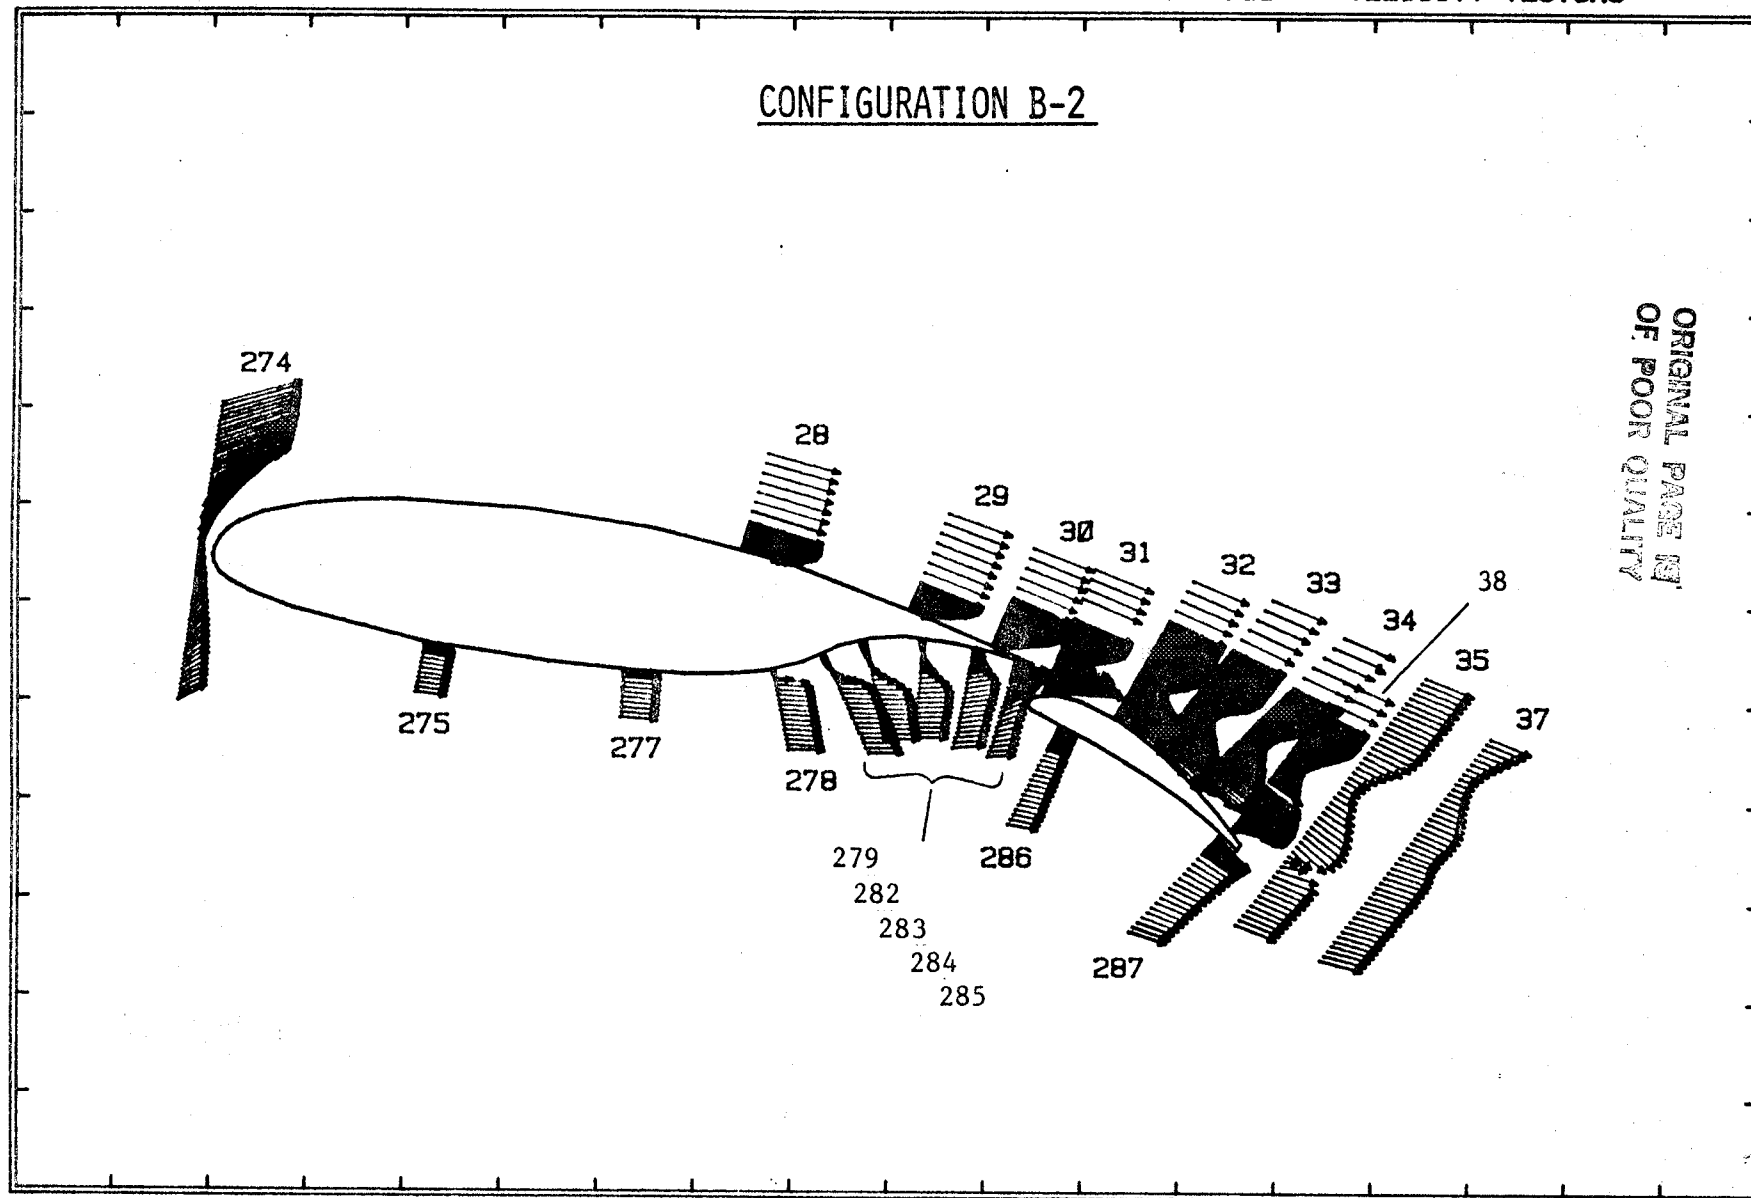


FIGURE 42

## LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-30 G-0.040 OH-0.0

ALPHA-12.00

VELOCITY VECTORS

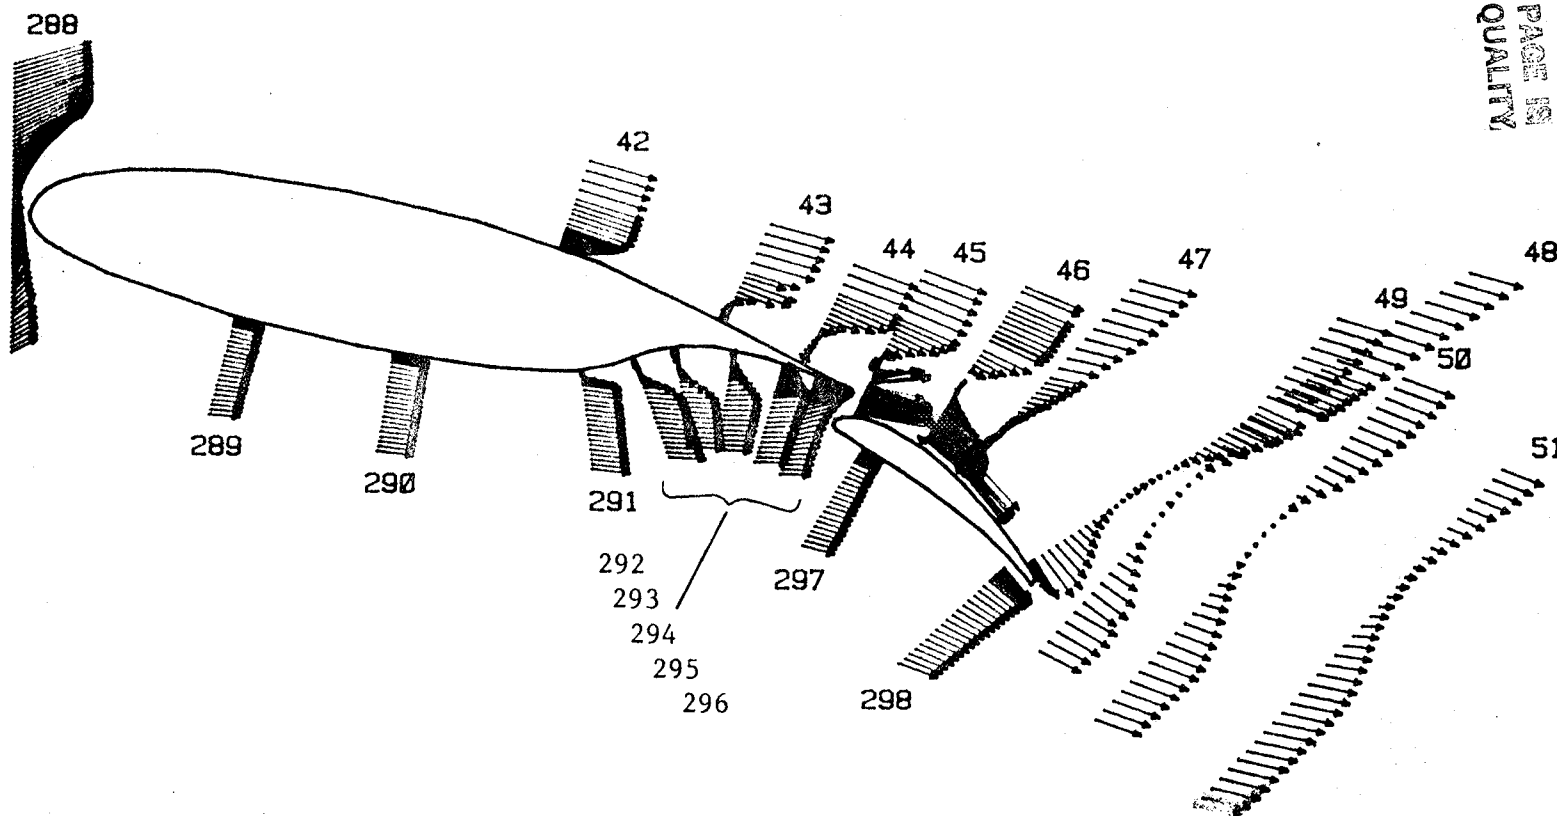
CONFIGURATION B-3ORIGINAL PAGE IS  
OF POOR QUALITY

FIGURE 43

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-30 G-0.025 OH-0.0

ALPHA= 4.00

VELOCITY VECTORS

CONFIGURATION B-4

ORIGINAL PAGE IS  
OF POOR QUALITY

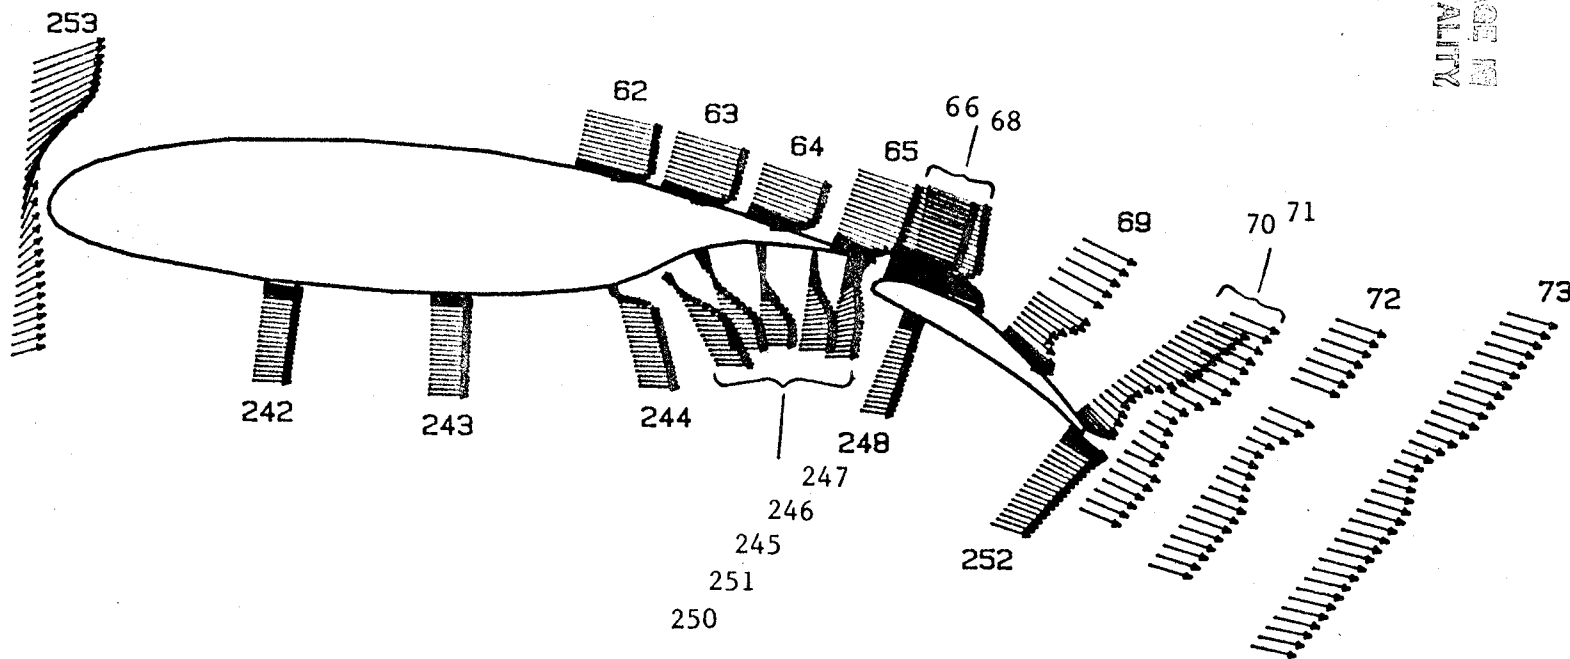


FIGURE 44



# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W FLAP-30 GAP-0.025 OH-0 ALPHA-12.00 VELOCITY VECTORS

ORIGINAL PAGE IS  
OF POOR QUALITY

CONFIGURATION B-5

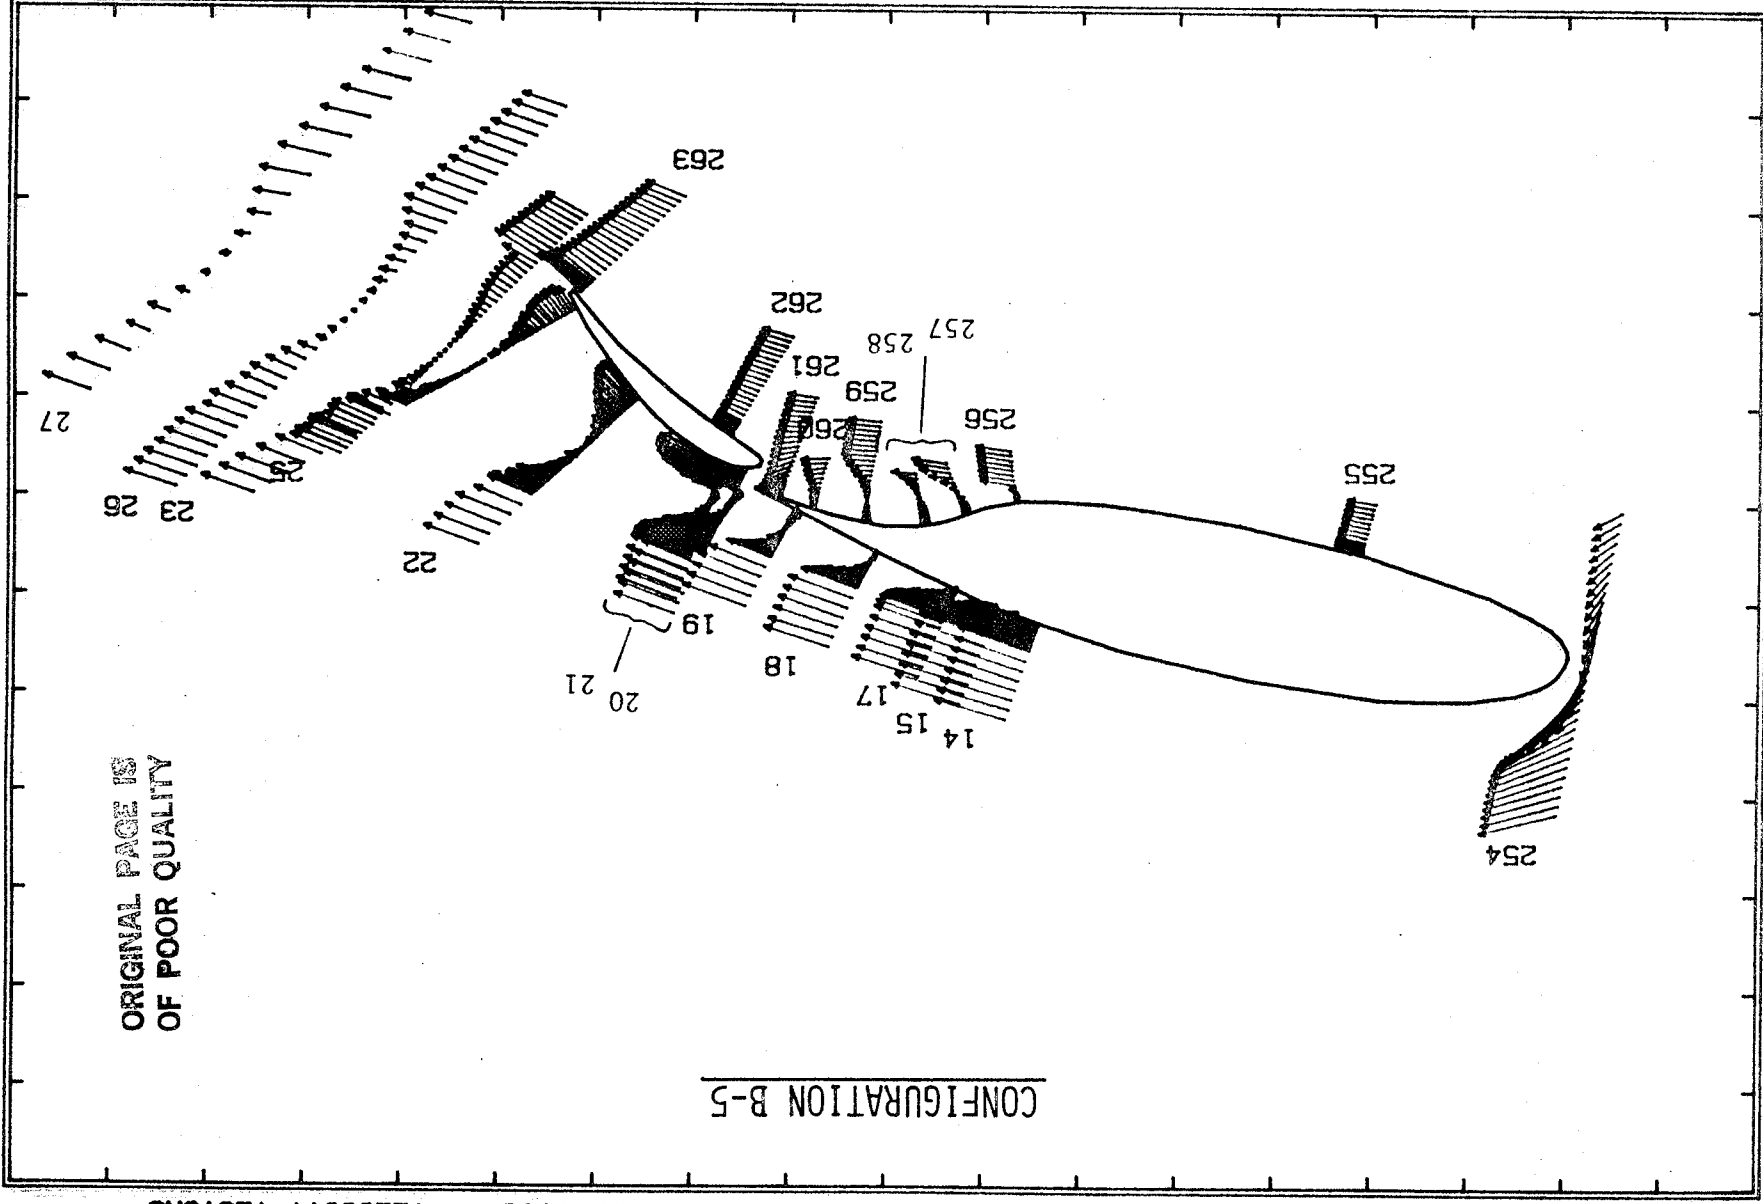


FIGURE 45

38  
515

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1F F-40.0 G-0.015 OH-0.025

ALPHA= 4.00

VELOCITY VECTORS

CONFIGURATION C-1

ORIGINAL PAGE IS  
OF POOR QUALITY

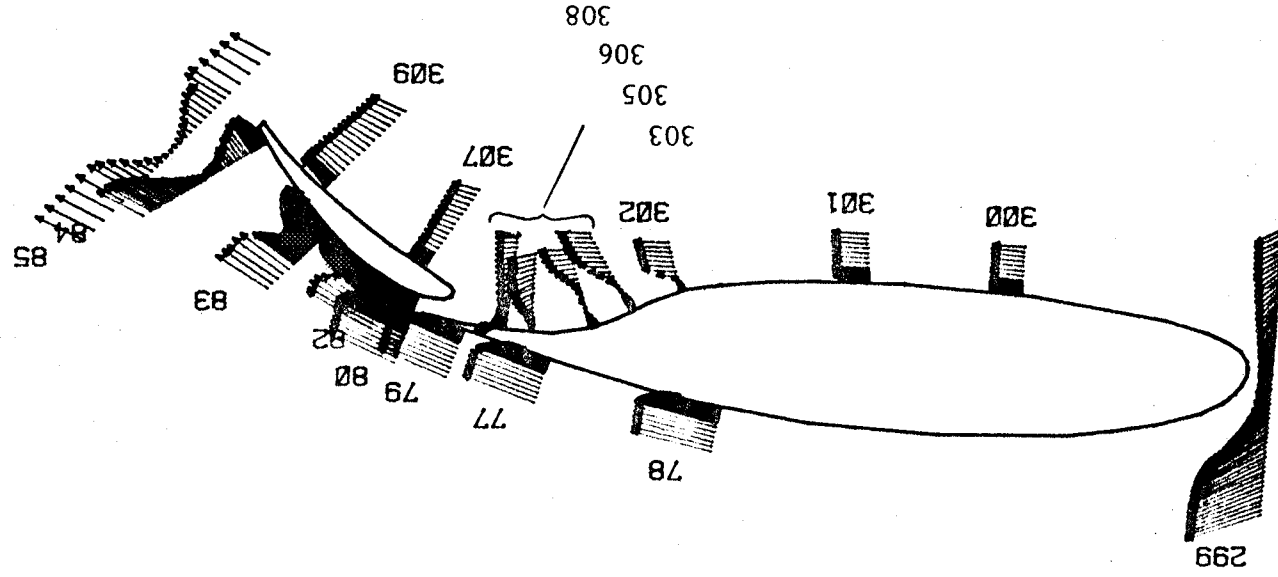


FIGURE 46

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAV-1W F-40 G-0.015 OH-0.025

ALPHA-8.00

VELOCITY VECTORS

CONFIGURATION C-2

ORIGINAL PAGE IS  
OF POOR QUALITY

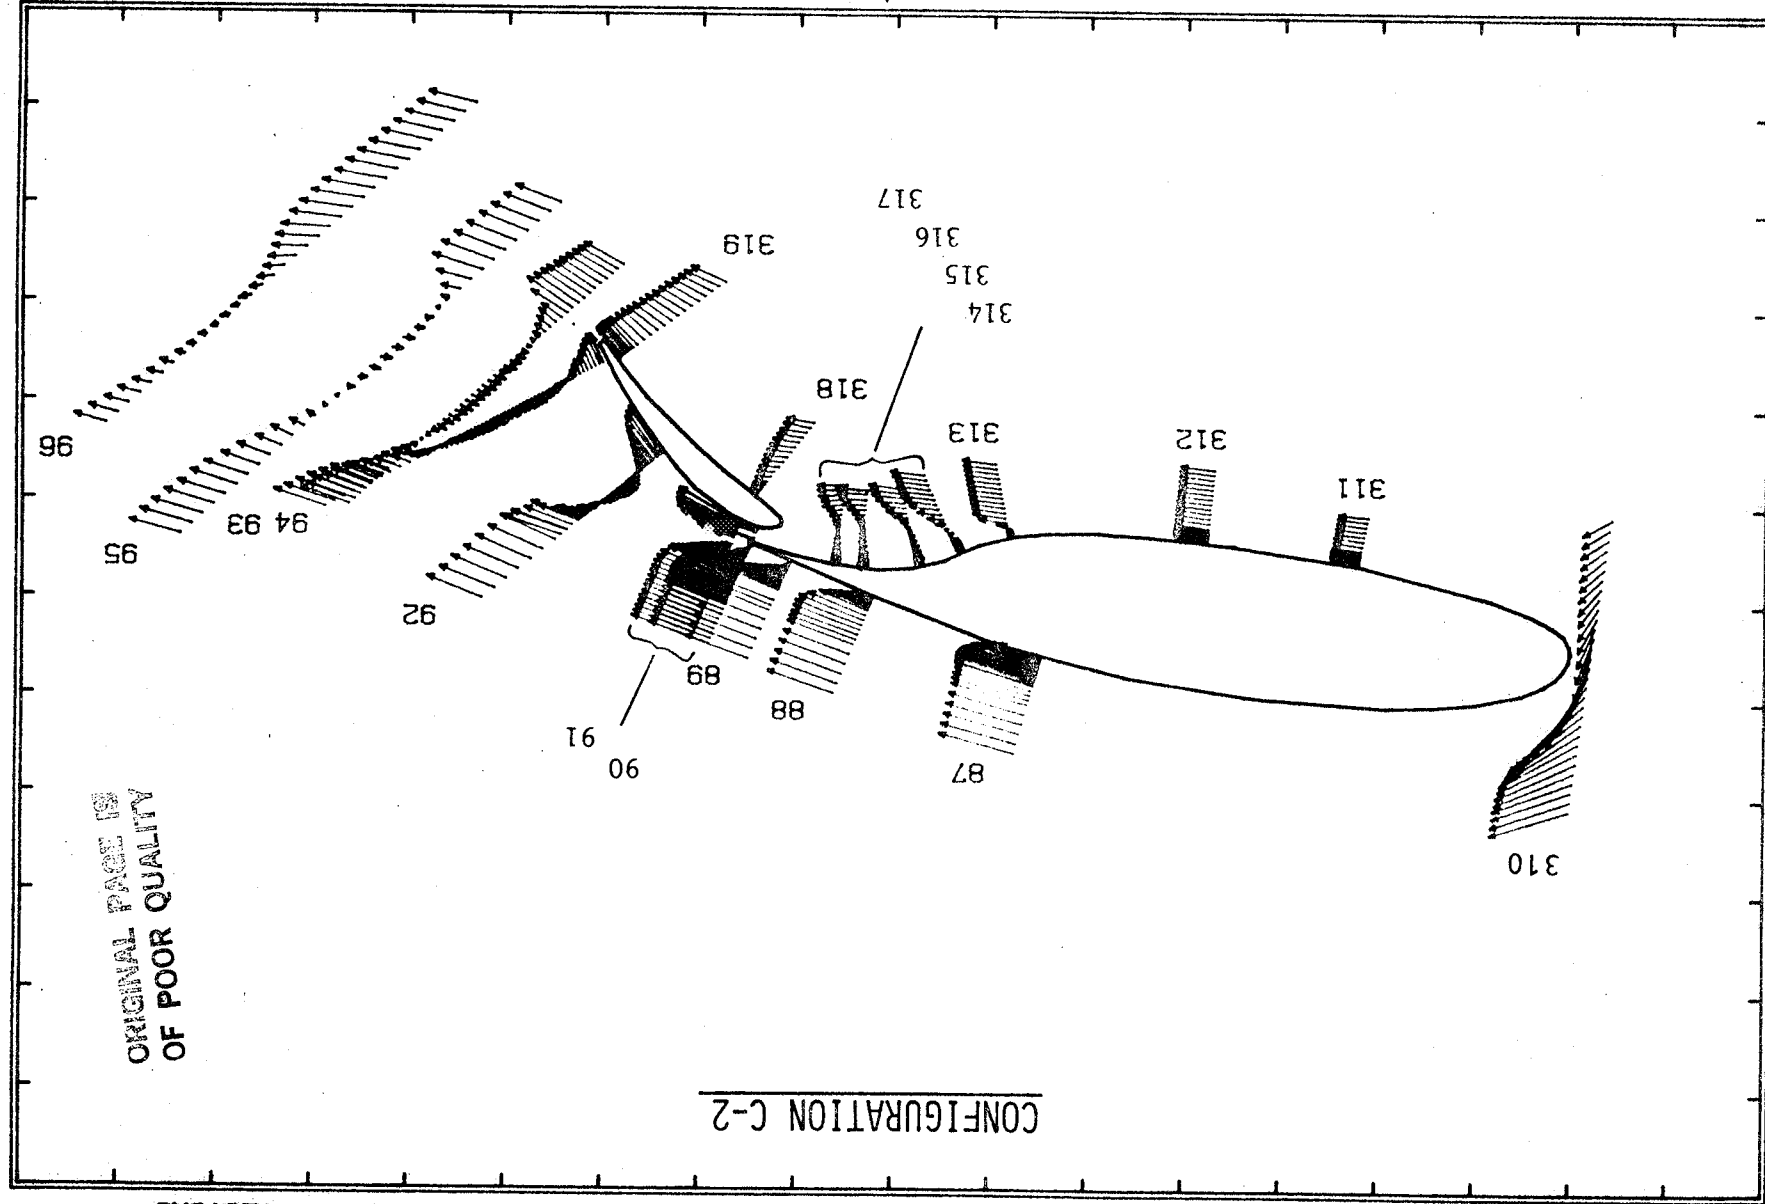


FIGURE 47

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-40 G-0.015 OH-0.025 ALPHA-10.00 VELOCITY VECTORS

CONFIGURATION C-3

ORIGINAL PAGE IS  
OF POOR QUALITY

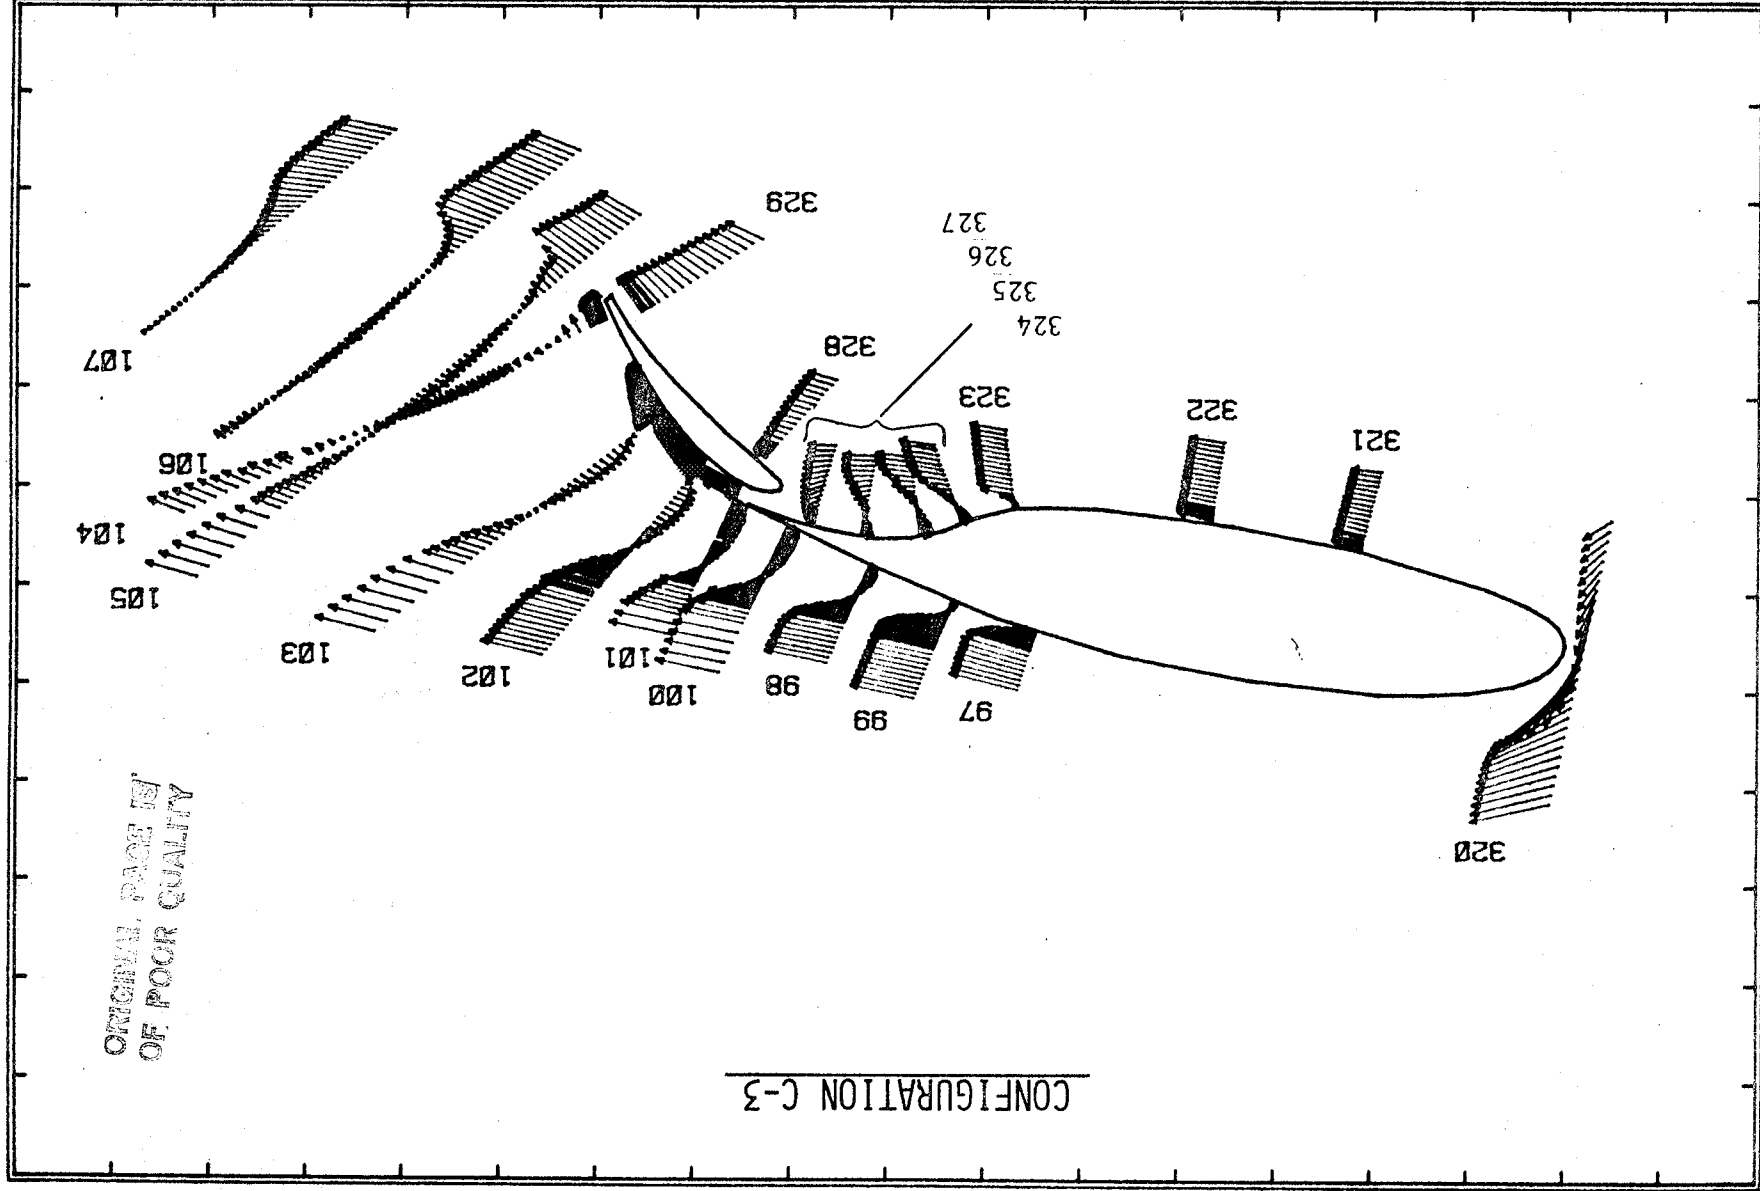



FIGURE 48

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F=40 G=0.015 OH=0.0

ALPHA= 4.00

VELOCITY VECTORS

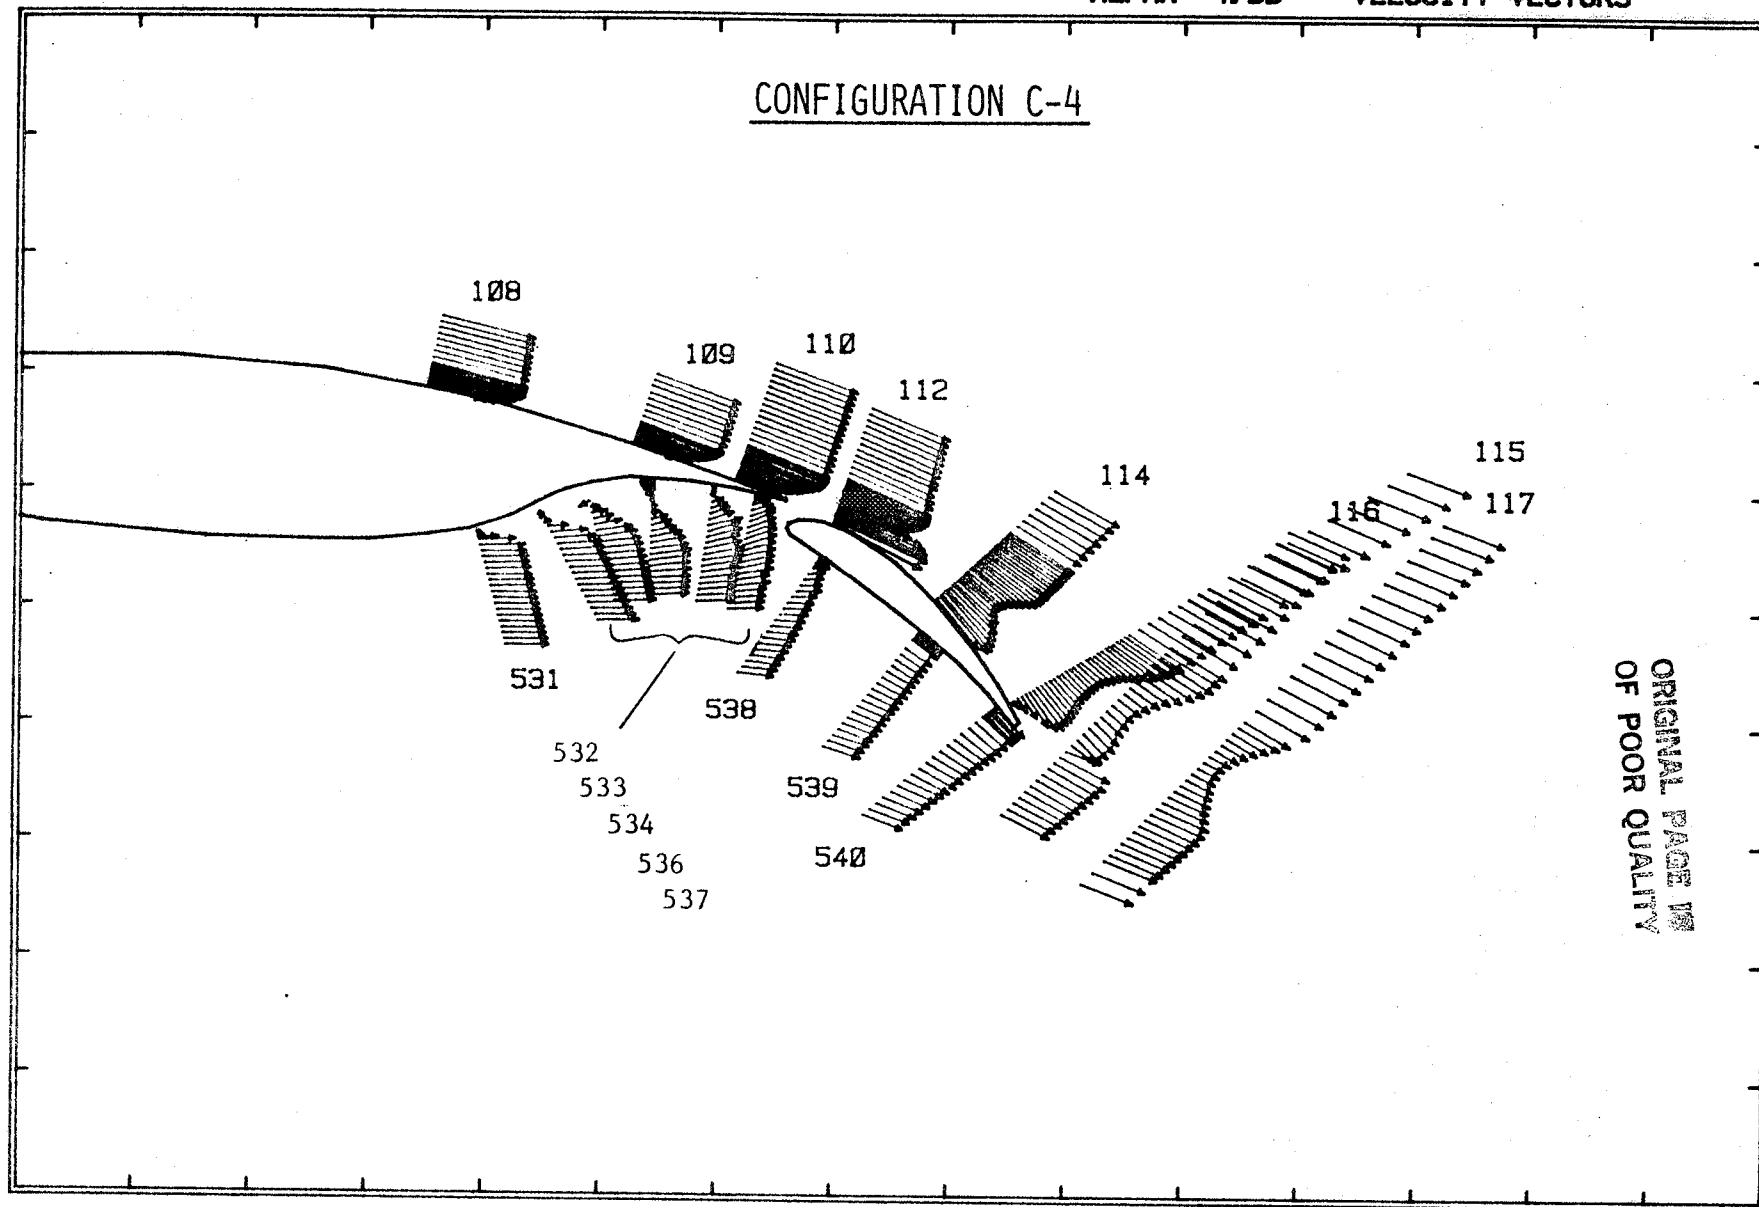

ORIGINAL PAGE 18  
OF POOR QUALITY

FIGURE 49

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

ERF 032 GAW-1 FLAP-40 GAP-.015 OH-0.0 ALPHA=8.00 VELOCITY VECTORS

CONFIGURATION C-5

ORIGINAL PAGE IS  
OF POOR QUALITY

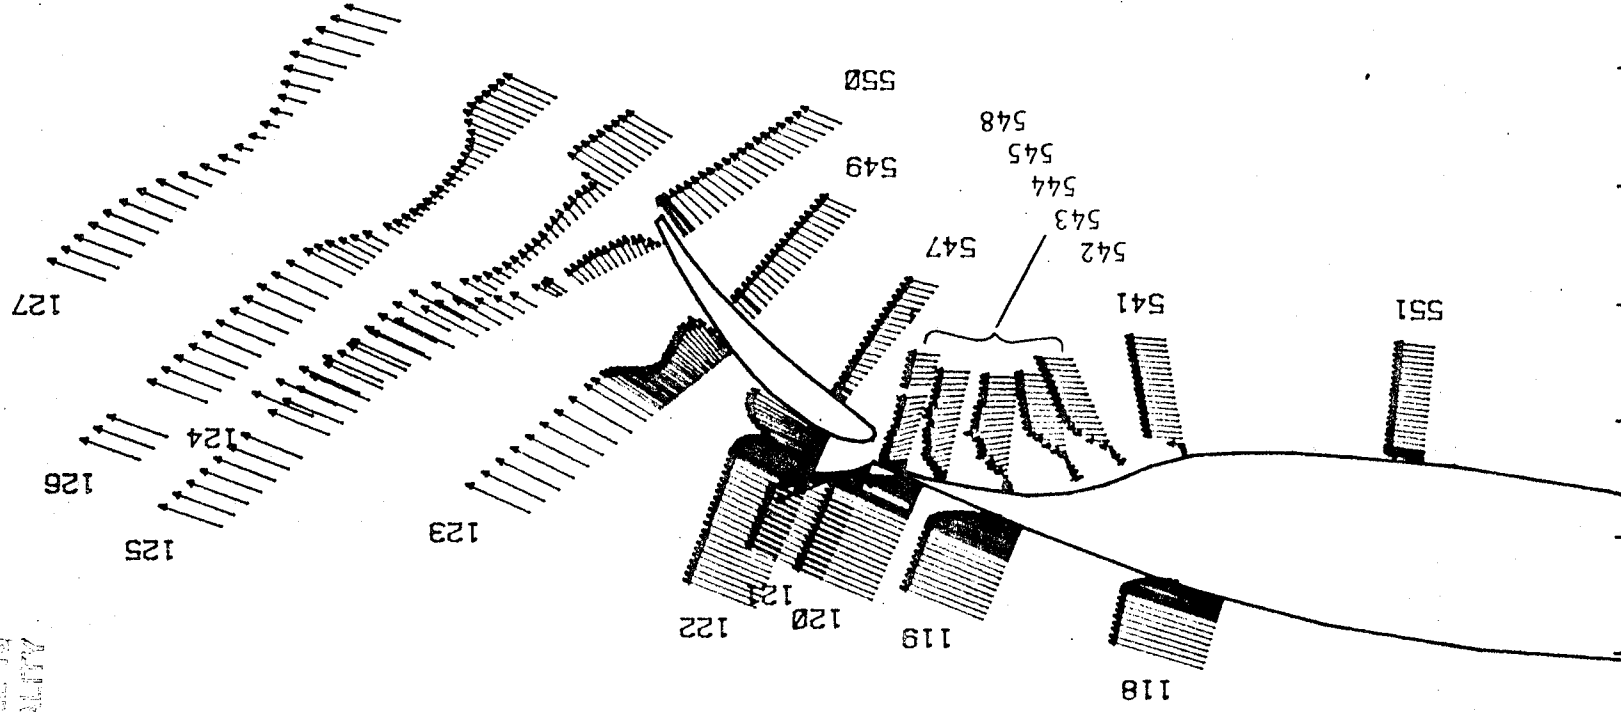


FIGURE 50

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-40 G-0.015 OH-0.0

ALPHA=11.00

VELOCITY VECTORS

CONFIGURATION C-6

ORIGINAL PAGE IS  
OF POOR QUALITY

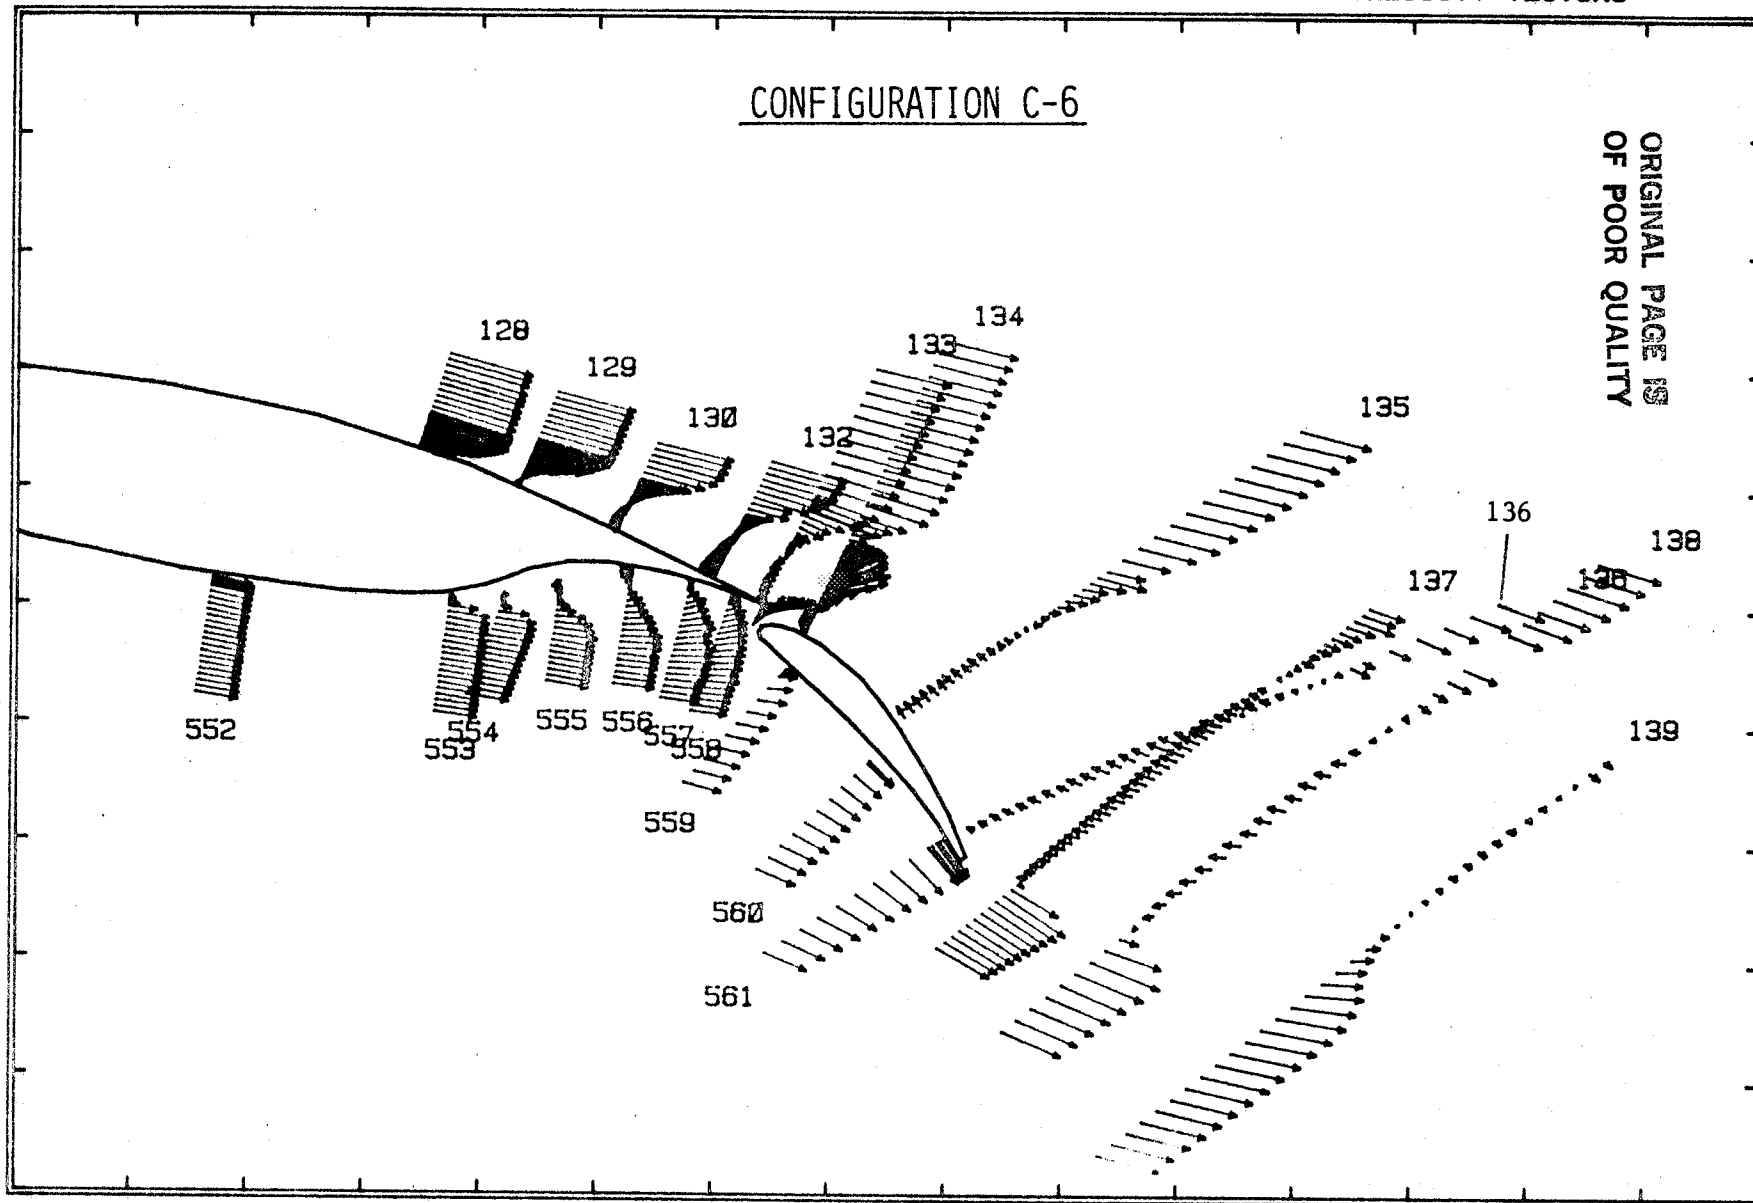


FIGURE 51


# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

D-1

GAW-1W F=0 S=27.0 G=.023 0=.028

ALPHA=18.00

VELOCITY VECTORS

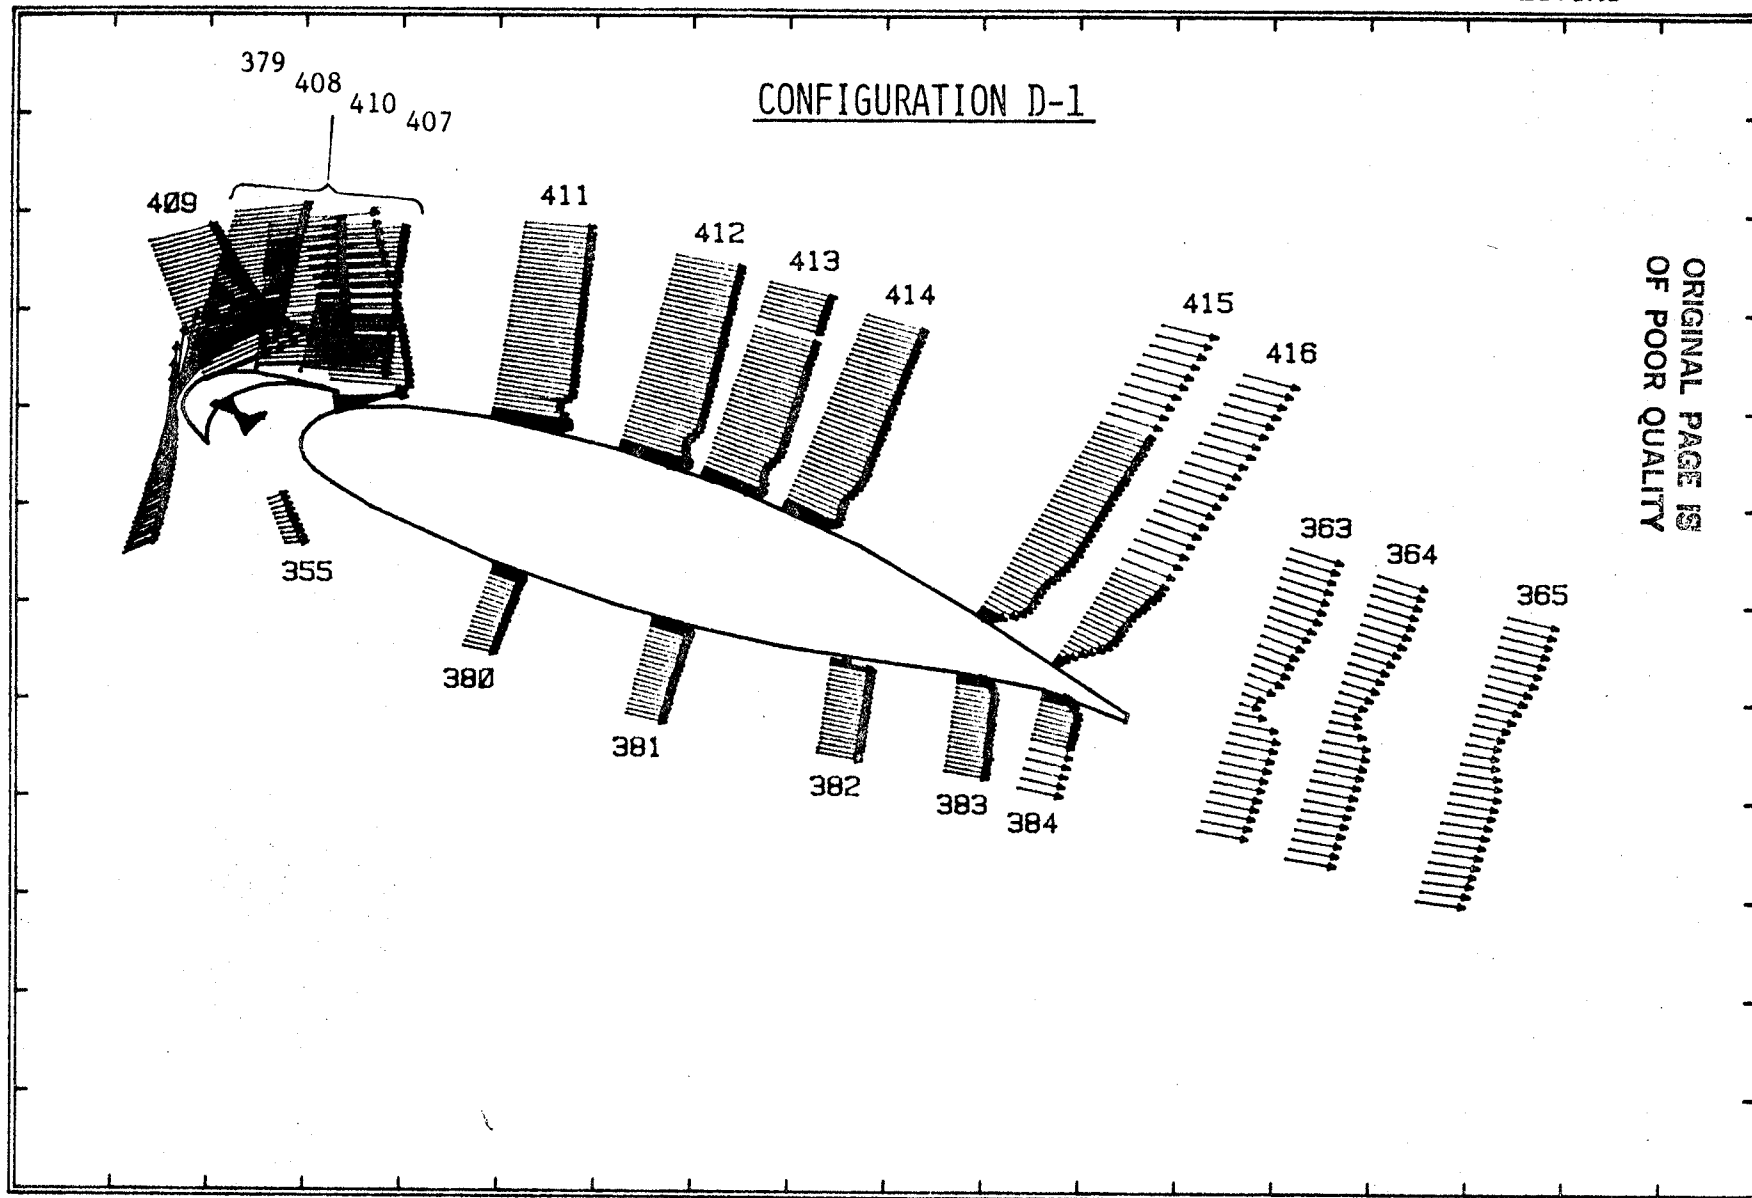

ORIGINAL PAGE IS  
OF POOR QUALITY

FIGURE 52



# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-0.0 S-27.0 G-0.023 OH-0.028 ALPHA-22.00 VELOCITY VECTORS

CONFIGURATION D-2

ORIGINAL PAGE IS  
OF POOR QUALITY

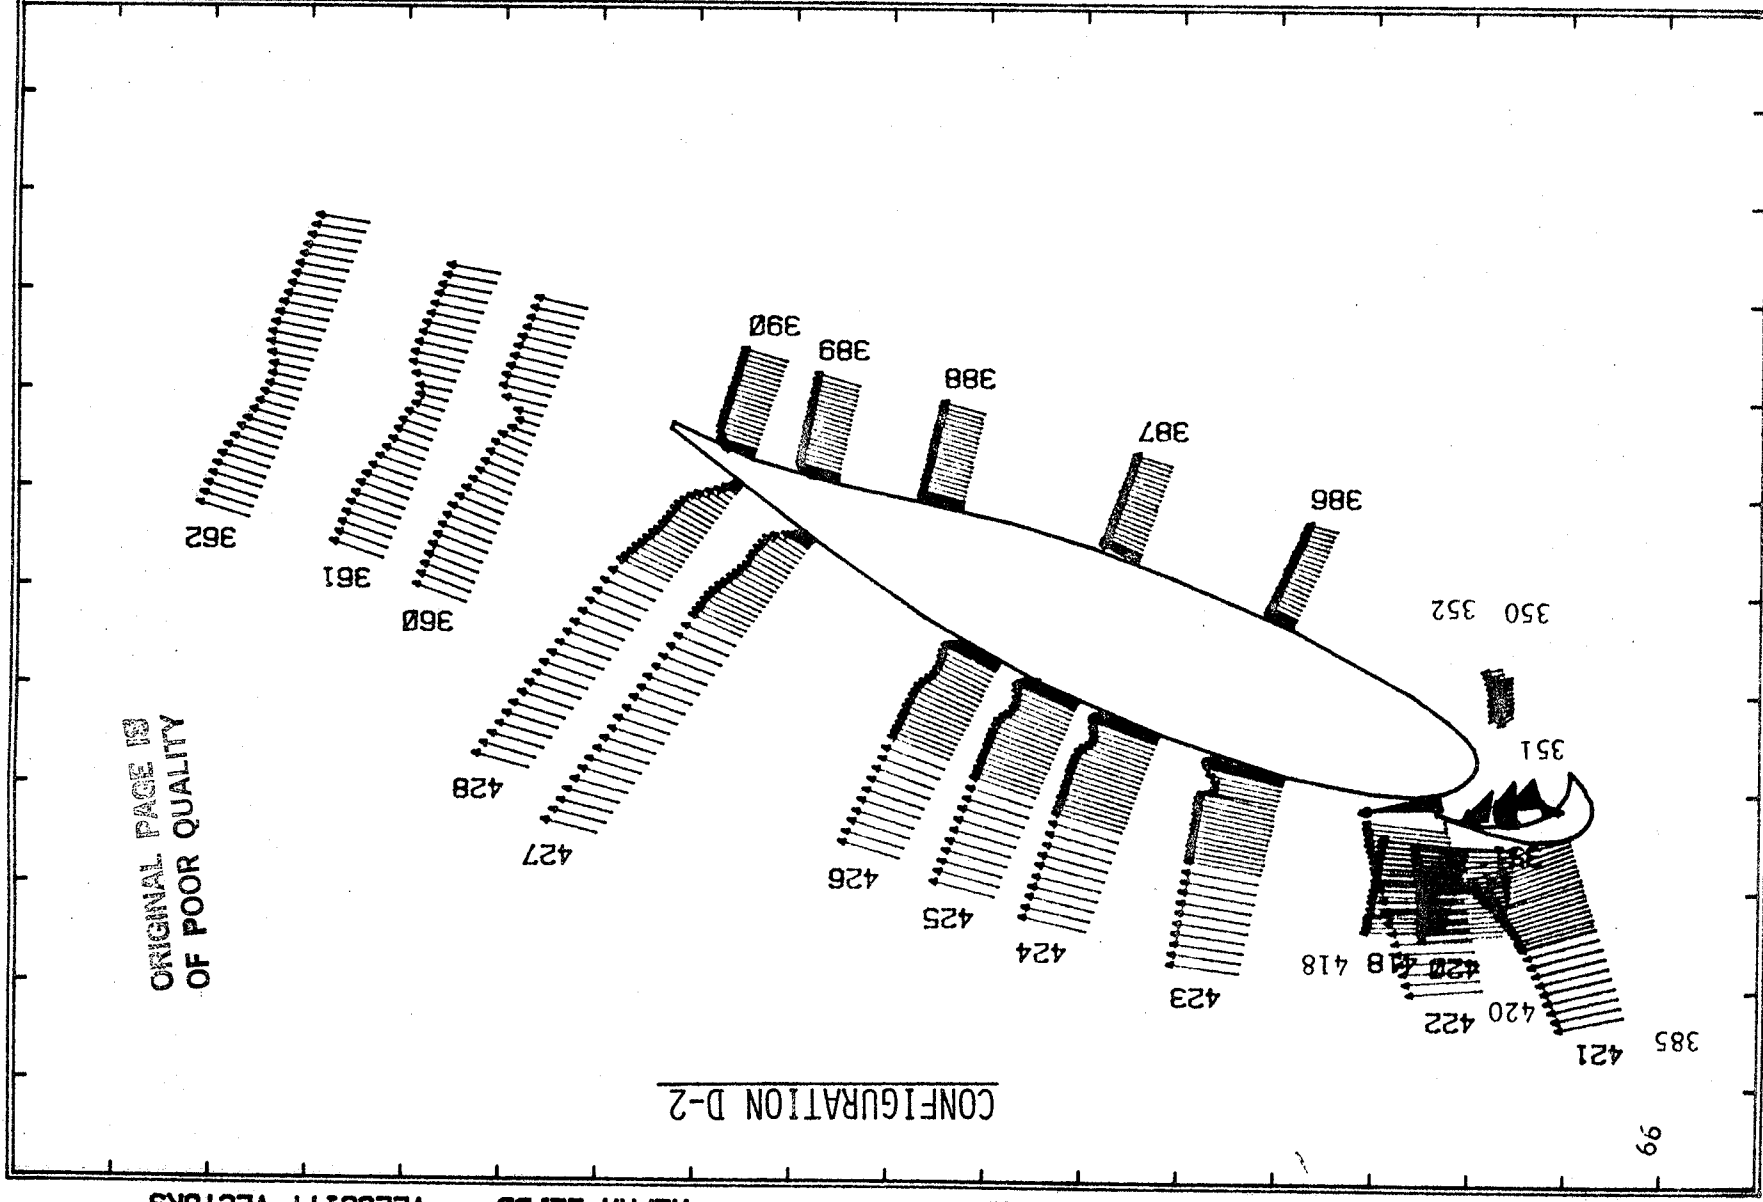


FIGURE 53

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F=0 S=27.0 G=.023 0=.028

ALPHA=24.00

VELOCITY VECTORS

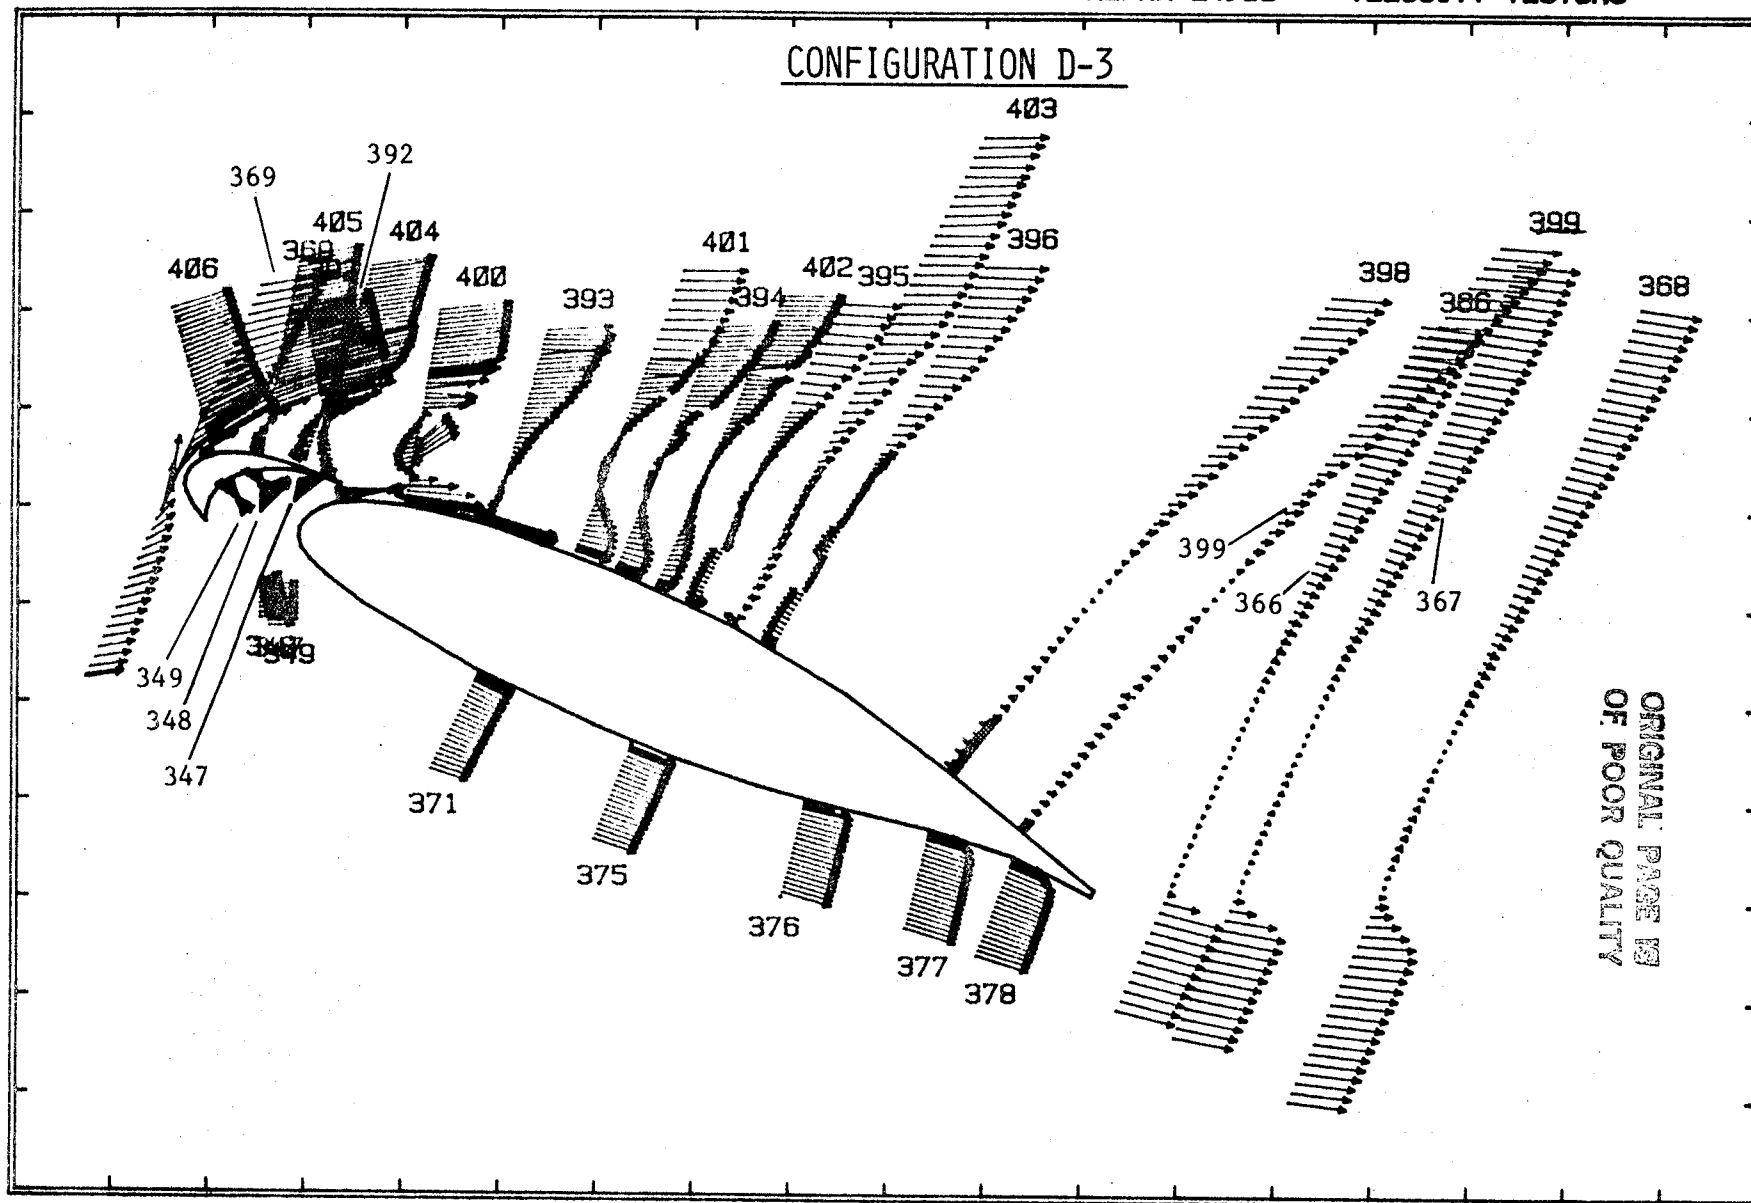


FIGURE 54

## LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-30 G-0.025 OH-0.0 S-42.5 G-0.015 OH-0.015 ALPHA-12.00 VELOCITY VECTORS


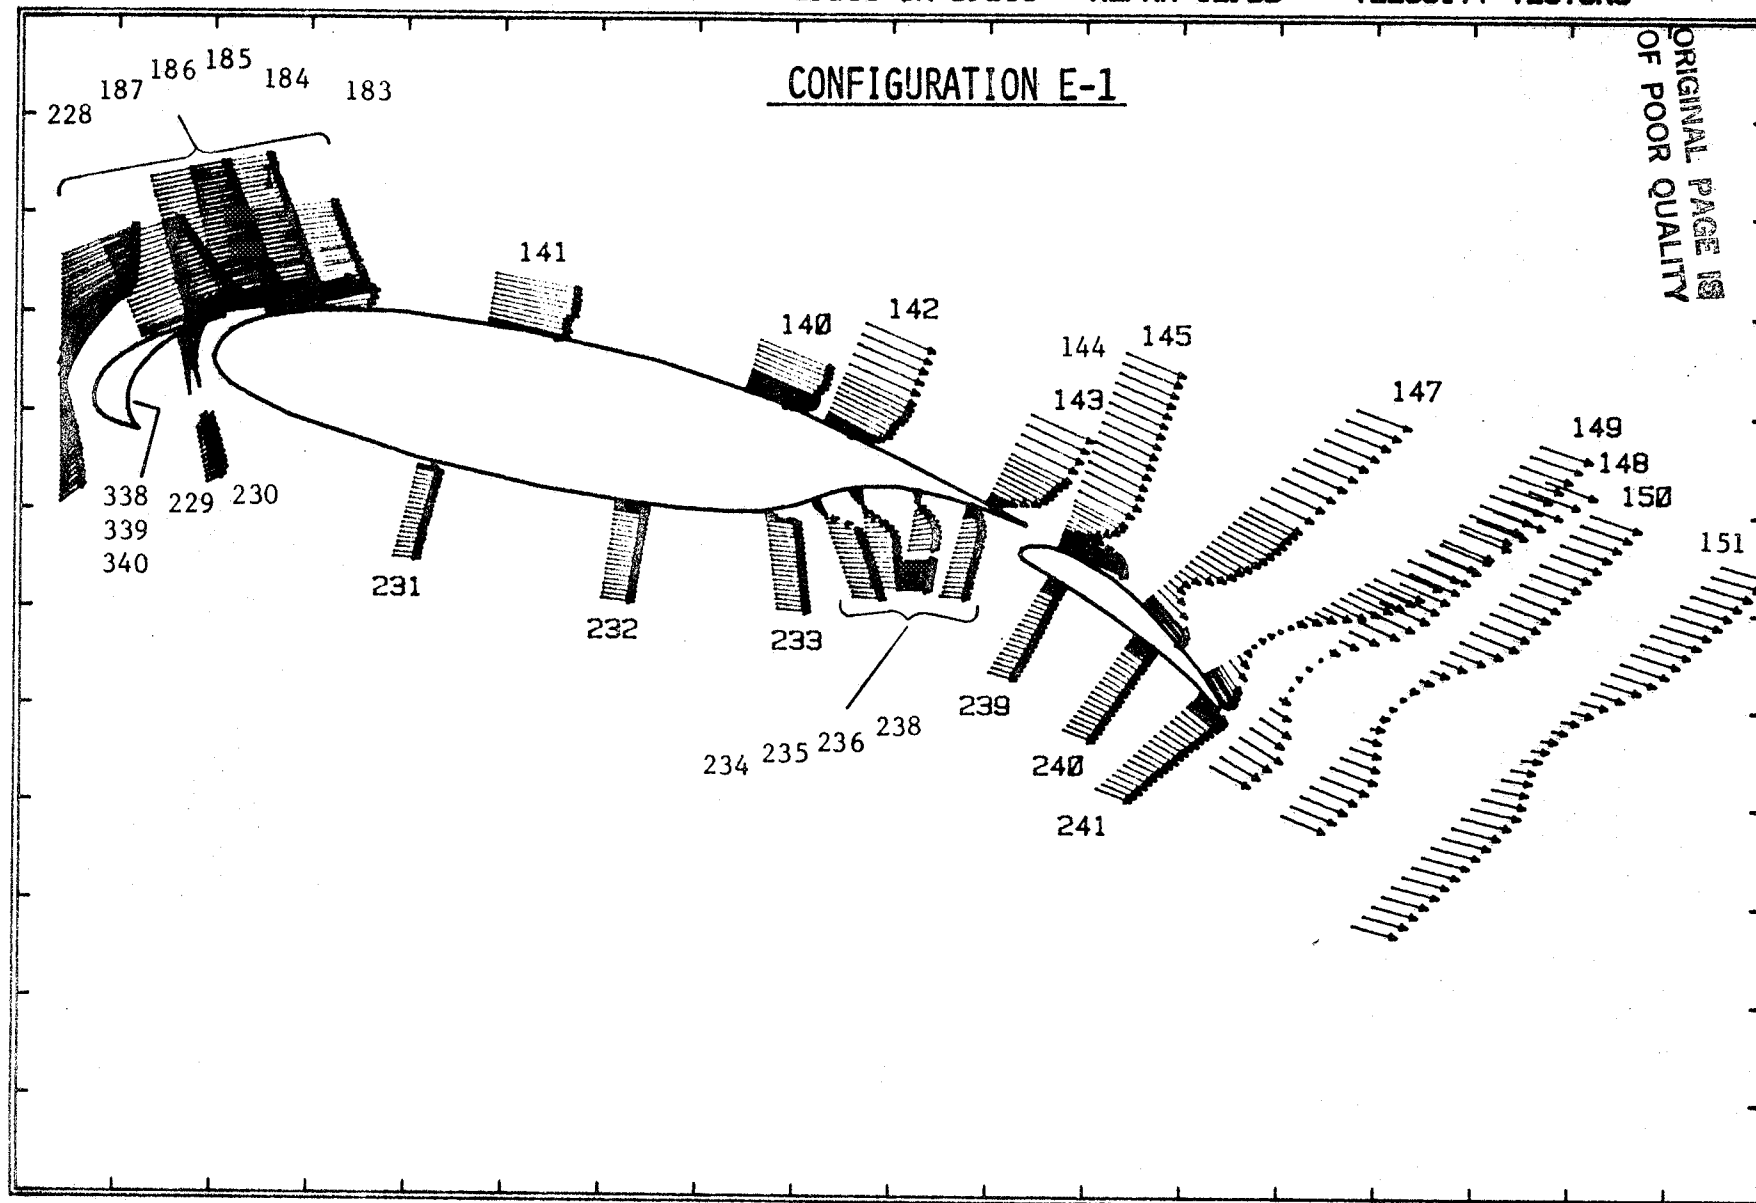


FIGURE 55

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-30 G-0.025 OH-0.0 S-42.5 G-0.015 OH-0.015 ALPHA-14.00 VELOCITY VECTORS

CONFIGURATION E-2

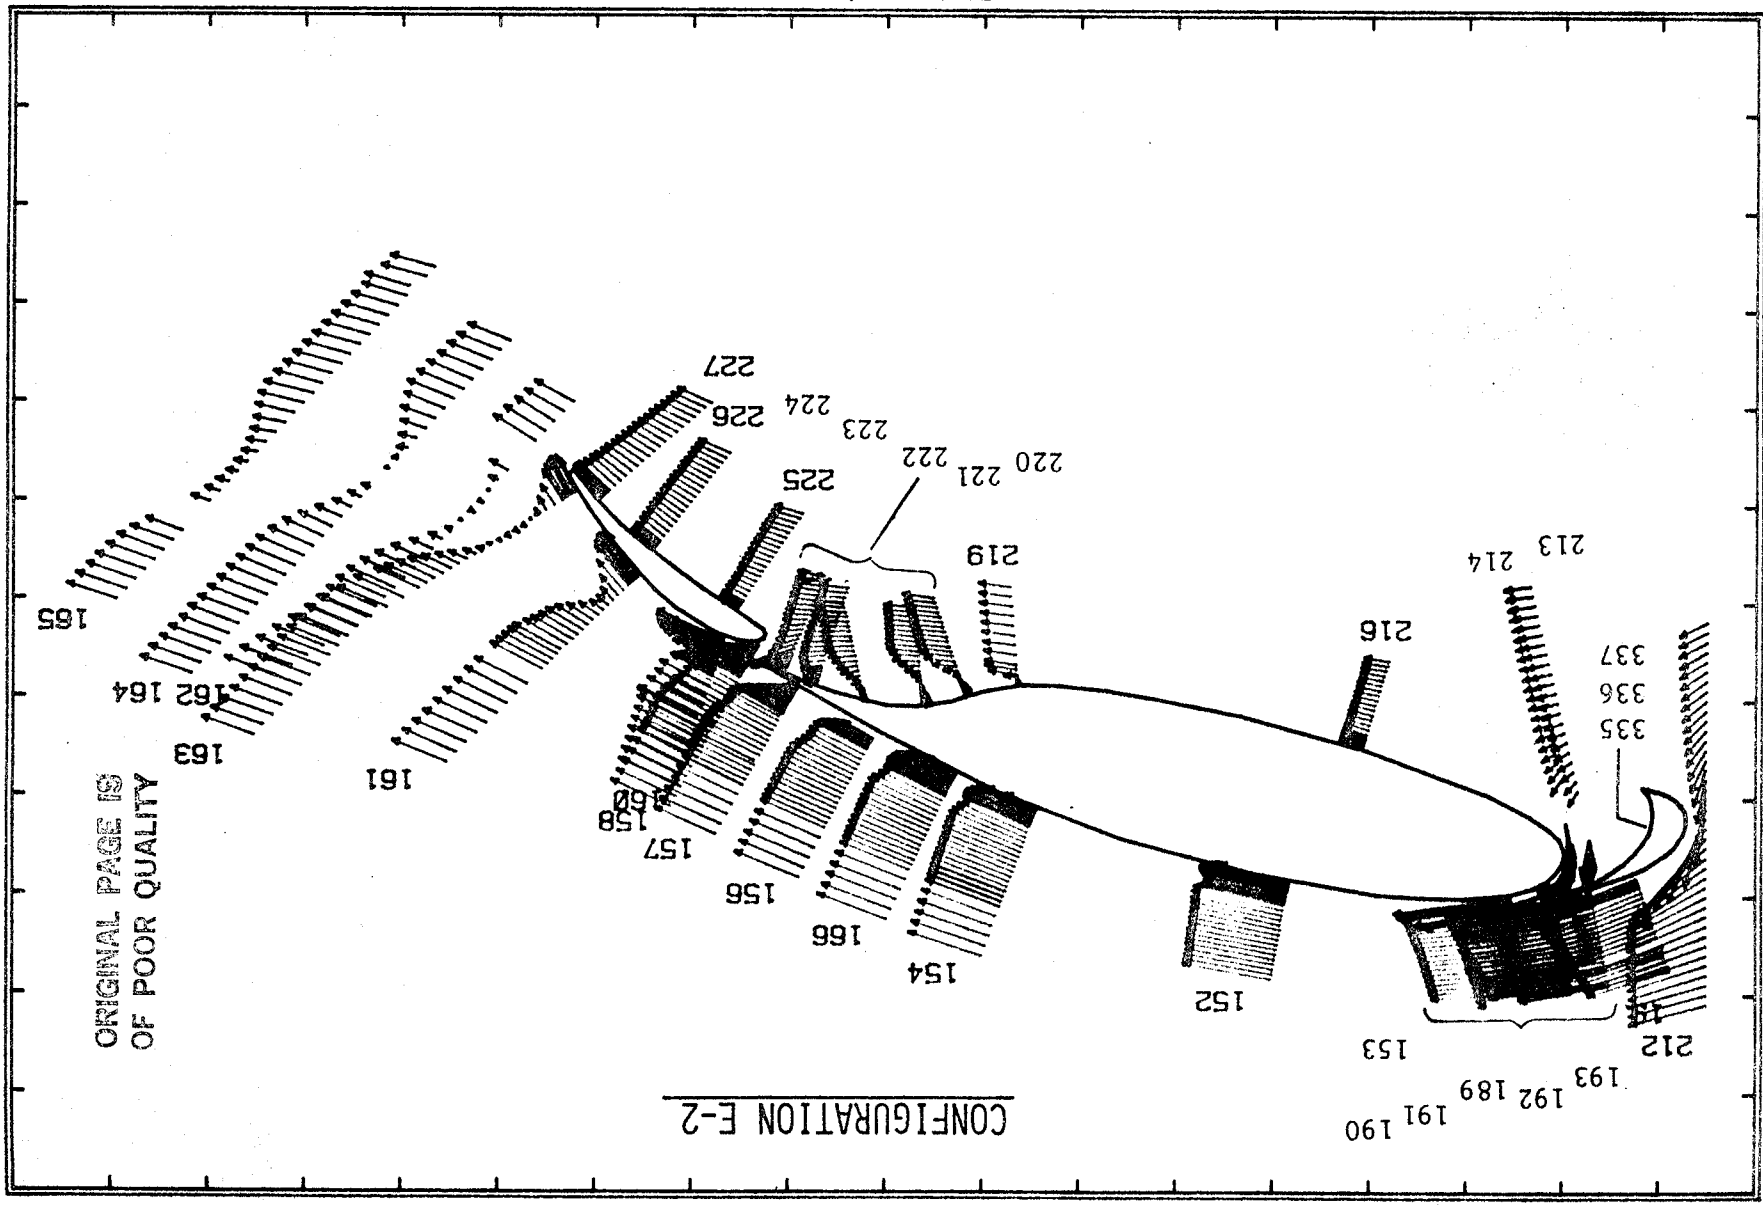

ORIGINAL PAGE IS  
OF POOR QUALITY

FIGURE 56

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-30 G-0.025 OH-0.0 S-42.5 G-0.015 OH-0.015 ALPHA-16.00 VELOCITY VECTORS

CONFIGURATION E-3

ORIGINAL PAGE IS  
OF POOR QUALITY

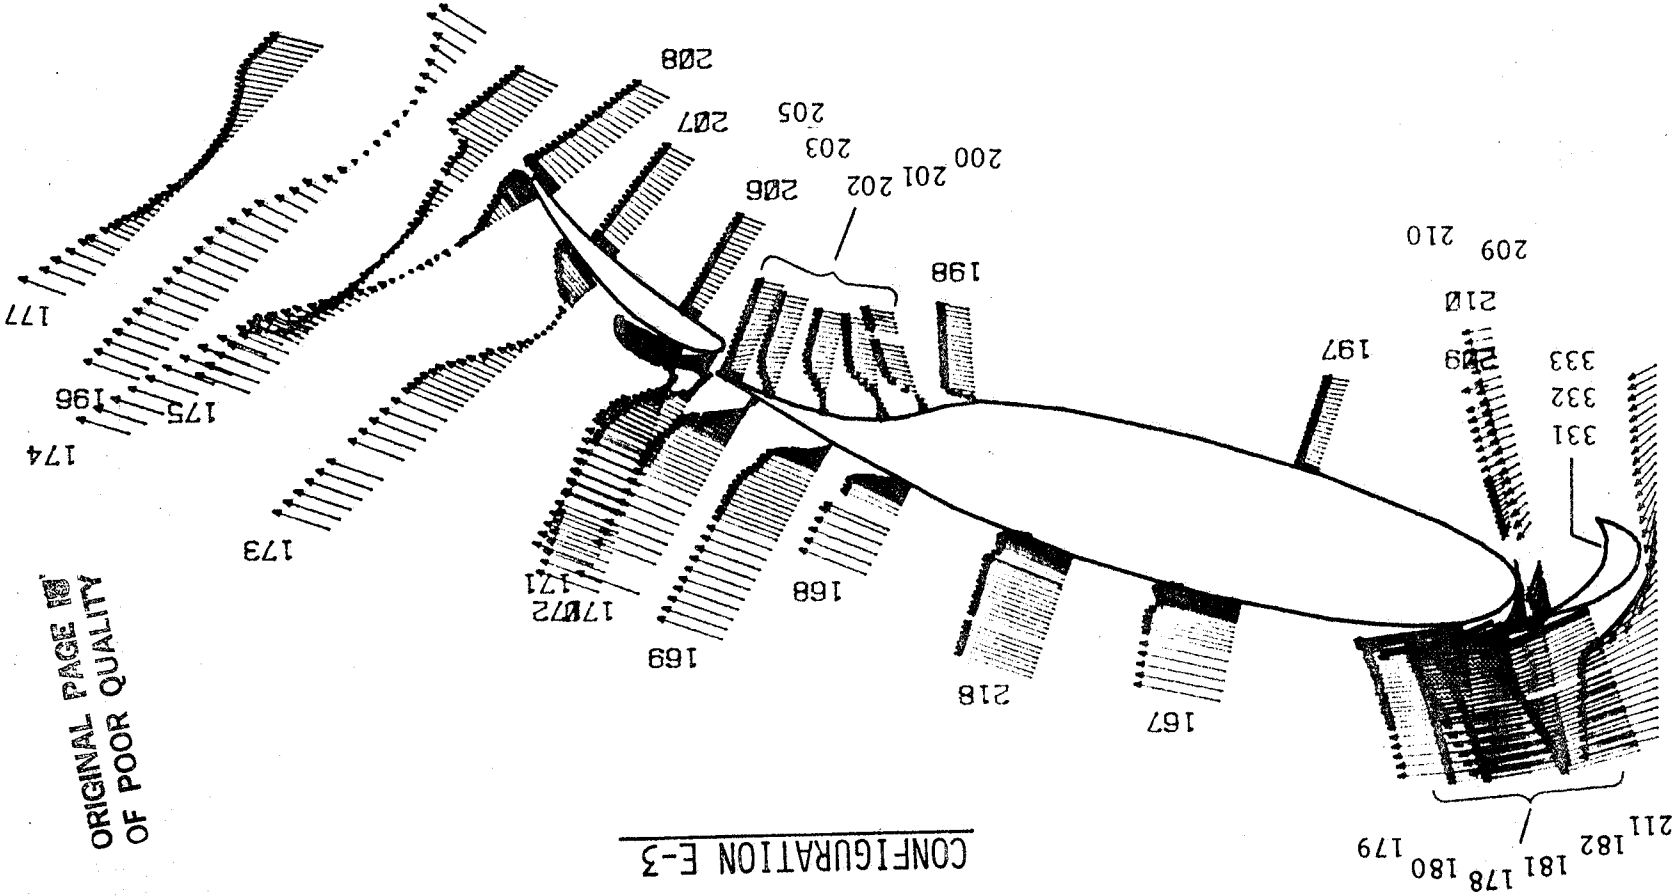


FIGURE 57

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F=40 G=.015 OH=.025 S=42 G=.015 OH=.015

ALPHA= 6.00

VELOCITY VECTORS

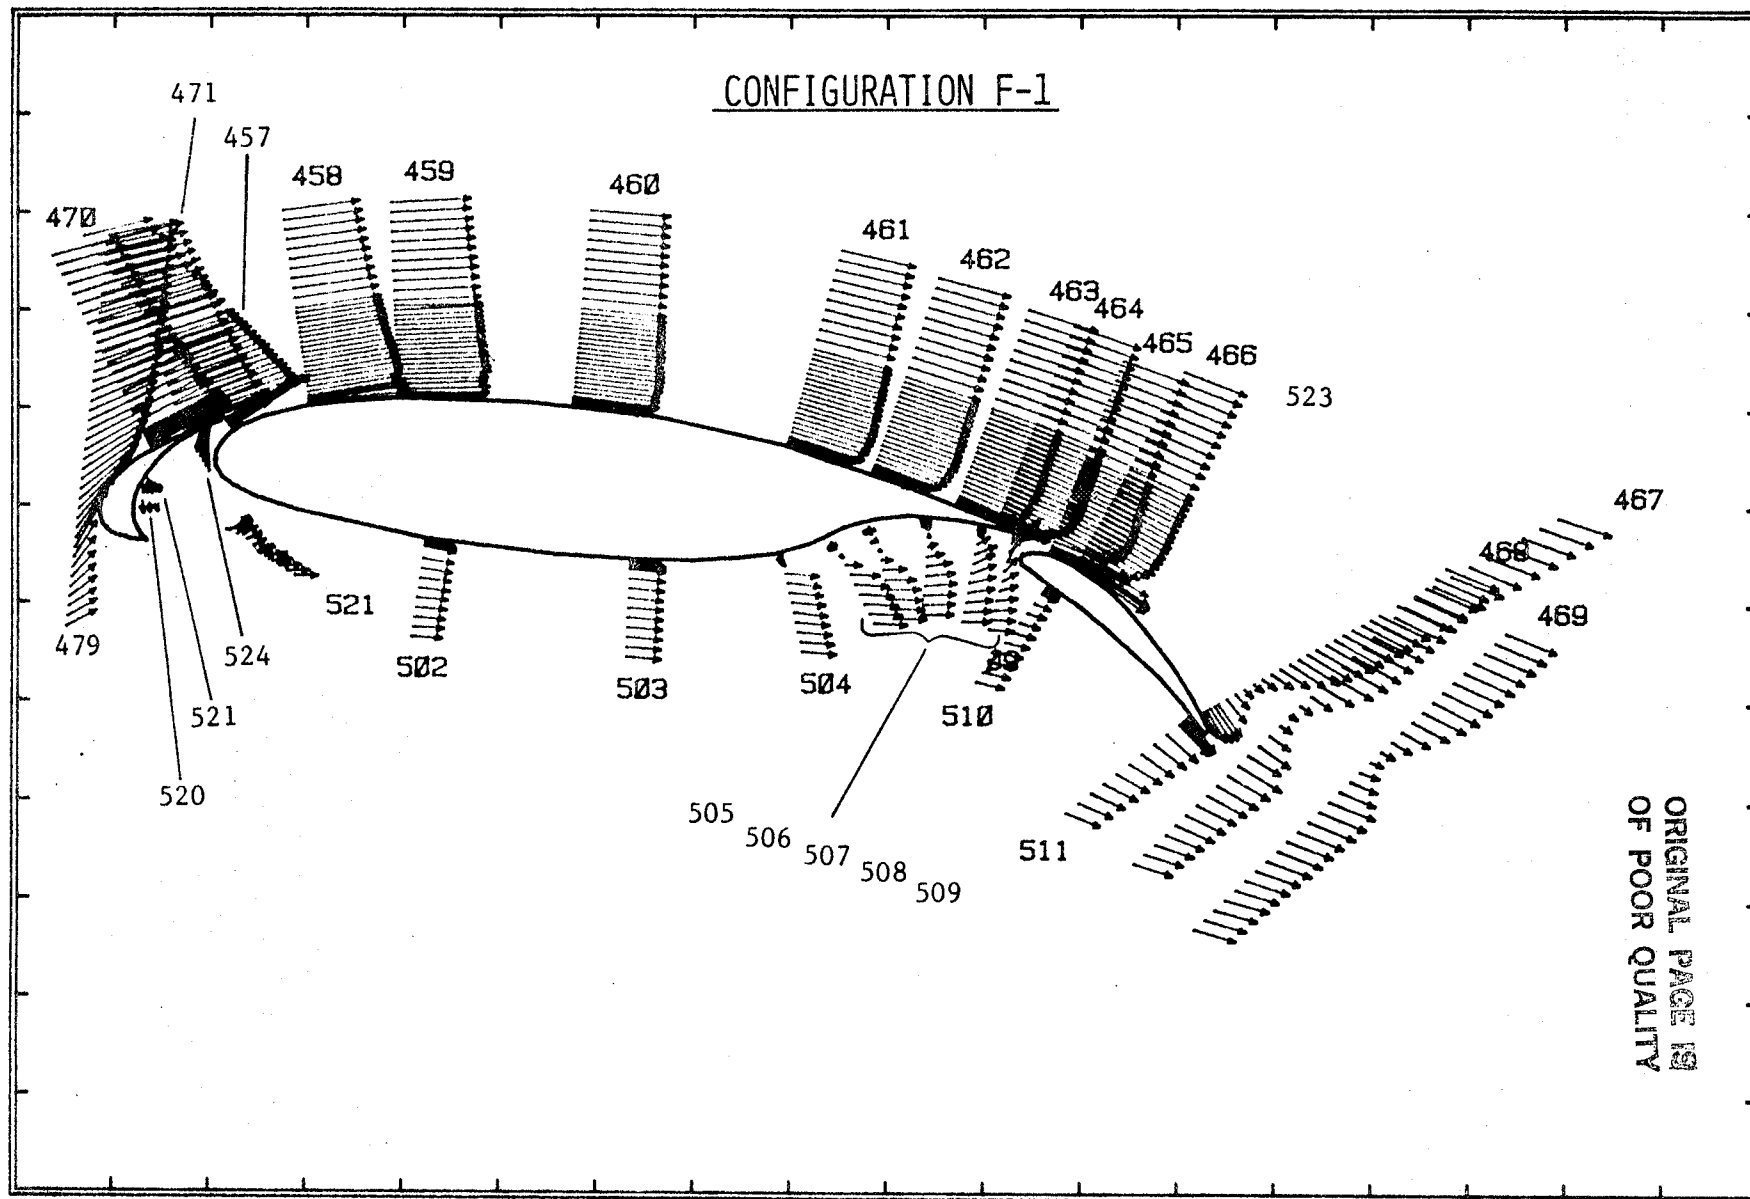



FIGURE 58

F1

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAV-1W F-40 G-.015 OH-.025 S-42 G-.015 OH-.015 ALPHA=10.00 VELOCITY VECTORS

CONFIGURATION F-2

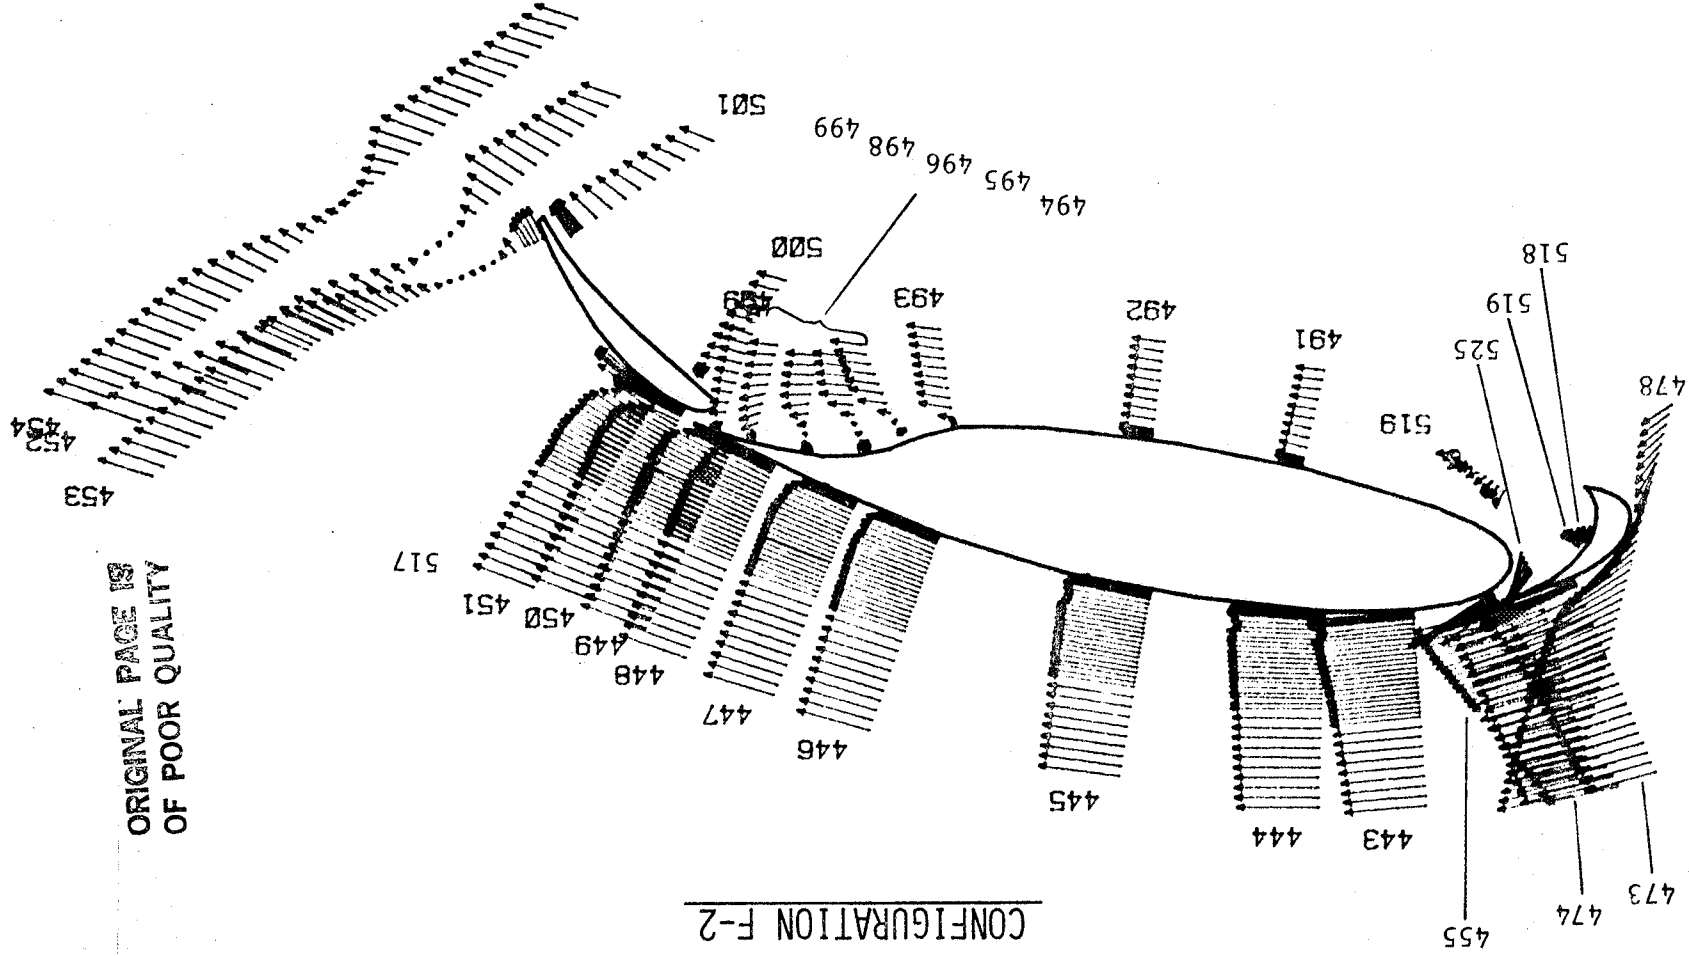

ORIGINAL PAGE IS  
OF POOR QUALITY

# LOCKHEED-GEORGIA COMPANY - LASER VELOCIMETER SURVEYS

GAW-1W F-40 G-.015 OH-.025 S-42 G-.015 OH-.015

ALPHA=14.00

VELOCITY VECTORS

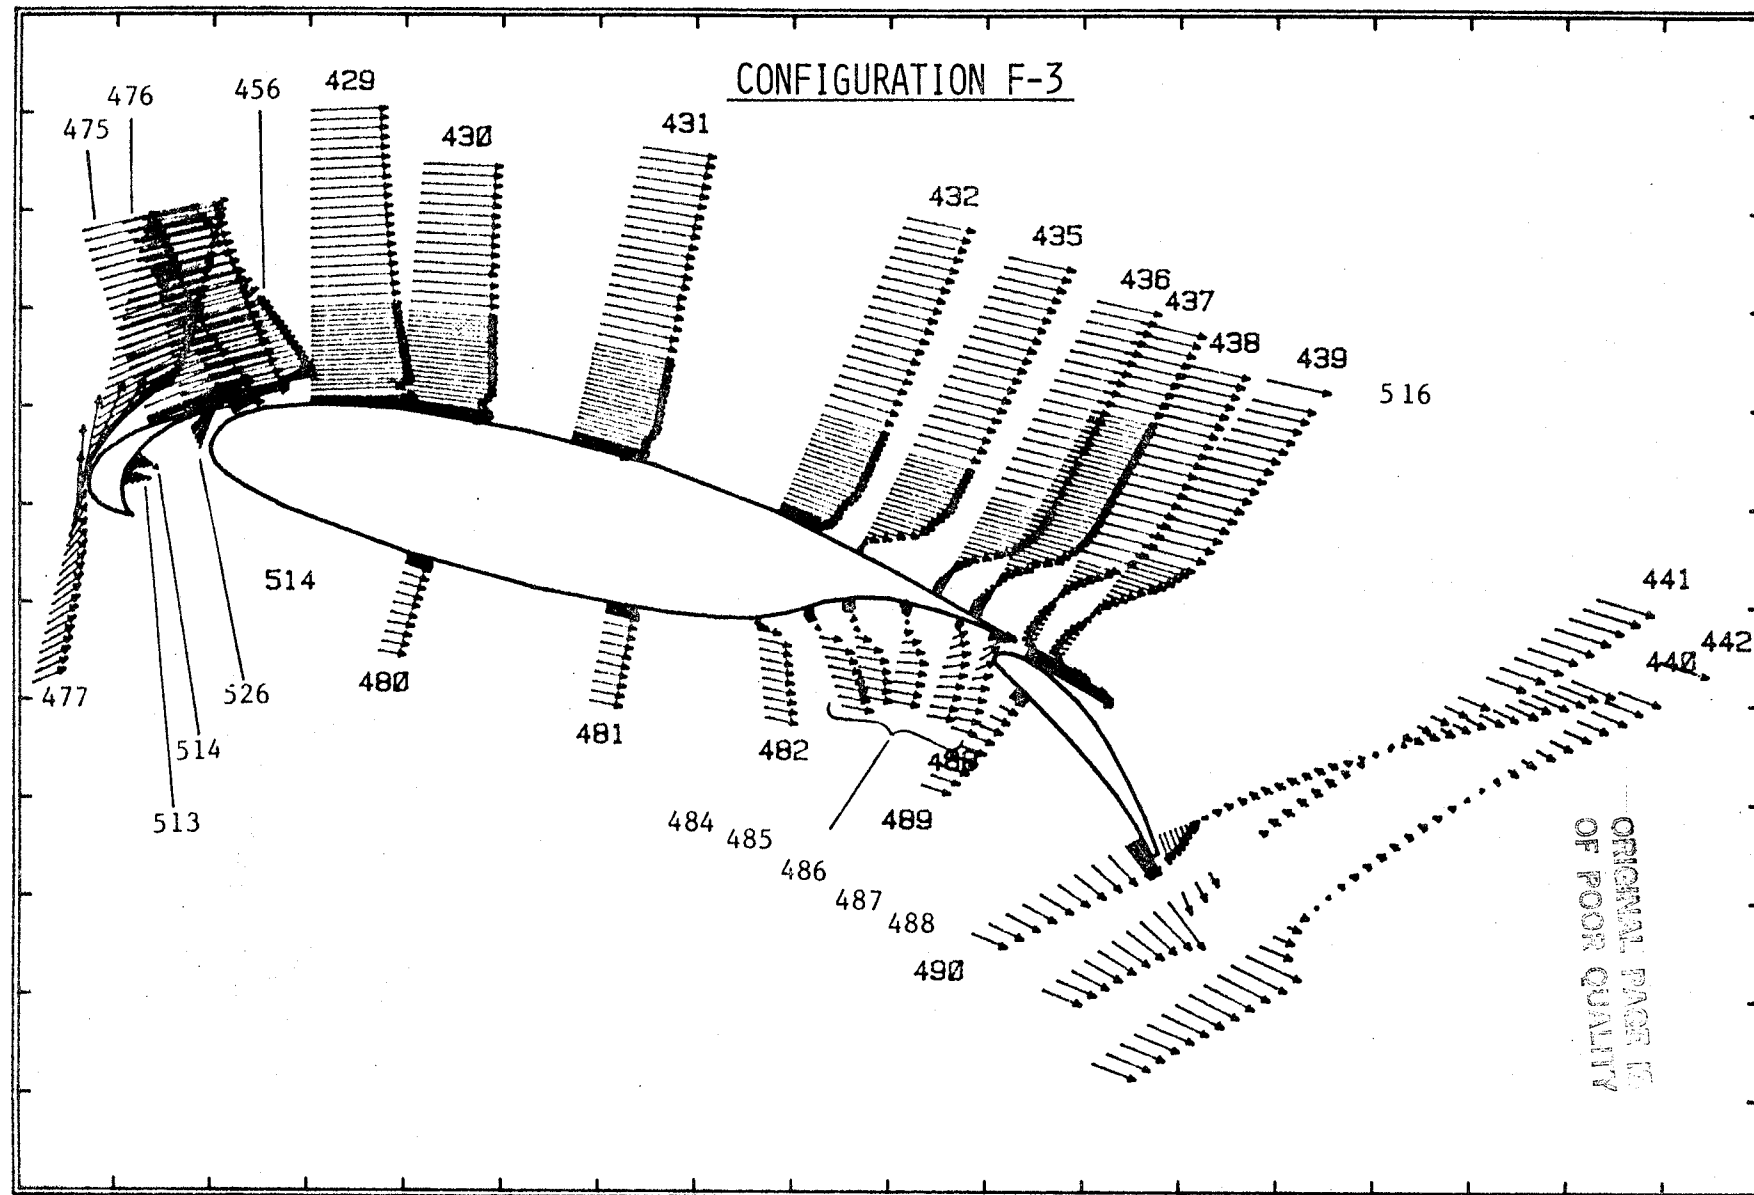


FIGURE 60





1. Report No. NASA CR-166018		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle EXPERIMENTAL STUDIES OF THE SEPARATING CONFLUENT BOUNDARY LAYER - VOLUME II, EXPERIMENTAL DATA				5. Report Date March 1983	
				6. Performing Organization Code	
7. Author(s) J. A. Braden, R. R. Whipkey, G. S. Jones and D. E. Lilley				8. Performing Organization Report No. LG82ER0184	
9. Performing Organization Name and Address Lockheed-Georgia Co. 86 South Cobb Drive Marietta, GA 30063				10. Work Unit No.	
				11. Contract or Grant No. NAS1-16028	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546				13. Type of Report and Period Covered Contractor Report	
				14. Sponsoring Agency Code	
15. Supplementary Notes Langley Technical Monitor: Harry L. Morgan, Jr. Supplement to NASA CR-166018 is available on request. Final Report					
16. Abstract  Test descriptions and results are documented from an experimental low-speed study of the separating confluent boundary-layer on a NASA GAW-1 (General Aviation) high-lift airfoil. The airfoil was tested in a variety of high-lift configurations comprised of leading-edge slat and trailing-edge flap combinations. The primary test instrumentation was a two-dimensional laser-velocimeter (LV) system operating in a "back-scatter" mode. Surface-pressures and corresponding LV-derived boundary-layer profiles are given in terms of velocity components, turbulence intensities and Reynolds shear stresses as characterizing confluent boundary-layer behavior up to and beyond stall. Comparisons are given between LV-derived profiles and associated boundary-layer parameters and those obtained from more conventional instrumentation such as pitot-static traverses, Preston-tube measurements and hot-wire surveys. The complete data set are presented in two separate volumes. Volume I (NASA CR 3655) presents a descriptive summary of the experimental set-up along with limited test results. Pertinent comparisons of the results are made where possible with those from other sources. The present document and its supplement contain the bulk of the experimental measurements in both tabulated and plotted forms.					
17. Key Words (Suggested by Author(s))  Boundary Layers Multi-Element Airfoils Laser-Velocimetry			18. Distribution Statement  Unclassified - Unlimited  Subject Category 02		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 83	
				22. Price A05	



Appendixes A, B, C, D, and E which contain the LV-derived boundary-layer and wake data for approximately 30,000 combinations of airfoil geometric locations and configurations in the form of velocity vectors, turbulence intensities and Reynolds shear stresses are included in a microfilm "Supplement to NASA CR-166018."

Copies of this "Supplement to NASA CR-166018" will be furnished upon request. Request for the supplement should be addressed to:

NASA Scientific and Technical Information Facility  
P. O. Box 8757  
Baltimore/Washington International Airport, MD 21240

Cut here

Date \_\_\_\_\_

Please send a microfilm copy of "Supplement to NASA CR-166018."

\_\_\_\_\_  
Name of organization

\_\_\_\_\_  
Street number

\_\_\_\_\_  
City and state

\_\_\_\_\_  
Zip code

Attention: \_\_\_\_\_

\_\_\_\_\_  
Name

\_\_\_\_\_  
Title

